
**BEFORE THE
NOVA SCOTIA UTILITY AND REVIEW BOARD
OF THE PROVINCE OF NOVA SCOTIA**

**North American Electric)
Reliability Corporation)**

**FIRST QUARTER 2018 APPLICATION
FOR APPROVAL OF RELIABILITY STANDARDS OF THE
NORTH AMERICAN ELECTRIC RELIABILITY CORPORATION**

Shamai Elstein
Senior Counsel
North American Electric Reliability Corporation
1325 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 400-3000
shamai.elstein@nerc.net

*Counsel for the North American Electric
Reliability Corporation*

May 31, 2018

TABLE OF CONTENTS

I.	NOTICE AND COMMUNICATIONS	2
II.	REQUEST FOR APPROVAL OF RELIABILITY STANDARDS.....	2
A.	BACKGROUND: NERC QUARTERLY FILING OF PROPOSED RELIABILITY STANDARDS	2
B.	OVERVIEW OF NERC RELIABILITY STANDARDS DEVELOPMENT PROCESS.....	4
C.	DESCRIPTION OF PROPOSED RELIABILITY STANDARDS, FIRST QUARTER 2018.....	5
1.	<i>EOP Reliability Standards</i>	6
III.	CONCLUSION.....	7

Exhibit A	Exhibit A-1 Reliability Standards Applicable to Nova Scotia, Approved by FERC in First Quarter 2018
	Exhibit A-2 Informational Summary of Each Reliability Standards Applicable to Nova Scotia, Approved by FERC in First Quarter 2018
	Exhibit A-3 Reliability Standards Filed for Approval
Exhibit B	List of Currently-Effective NERC Reliability Standards
Exhibit C	Updated <i>Glossary of Terms Used in NERC Reliability Standards</i>

**BEFORE THE
NOVA SCOTIA UTILITY AND REVIEW BOARD
OF THE PROVINCE OF NOVA SCOTIA**

North American Electric Reliability Corporation

**FIRST QUARTER 2018 APPLICATION
FOR APPROVAL OF RELIABILITY STANDARDS OF THE
NORTH AMERICAN ELECTRIC RELIABILITY CORPORATION**

The North American Electric Reliability Corporation (“NERC”) hereby submits to the Nova Scotia Utility and Review Board (“NSUARB”) an application for approval of NERC Reliability Standards approved by the United States Federal Energy Regulatory Commission (“FERC” or the “Commission”) during the first quarter of 2018 (from January 1, 2018 through March 31, 2018). NERC requests that the Reliability Standards approved by FERC in the first quarter of 2018 be made mandatory and enforceable for users, owners, and operators of the Bulk-Power System (“BPS”) within the Province of Nova Scotia.

In support of this request, NERC submits the following information: (i) a table listing the United States effective date of each Reliability Standard applicable to Nova Scotia that was approved by FERC in the first quarter of 2018 (**Exhibit A1**); (ii) an informational summary of each Reliability Standard applicable to Nova Scotia that was approved by FERC in the first quarter of 2018, including the standard's purpose, applicability, as well as the date that NERC filed the Reliability Standard with FERC and the date that FERC approved the Reliability Standard (**Exhibit A2**); (iii) the Reliability Standards approved by FERC in the first quarter of 2018 (**Exhibit A3**); (iv) an updated list of the currently-effective NERC Reliability Standards as approved by FERC (**Exhibit B**); and (v) the associated updated *Glossary of Terms Used in*

NERC Reliability Standards (“*NERC Glossary*”) (**Exhibit C**).¹

I. **NOTICE AND COMMUNICATIONS**

Notices and communications regarding this application may be addressed to:

Shamai Elstein
Senior Counsel
North American Electric Reliability Corporation
1325 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 400-3000
shamai.elstein@nerc.net

II. **REQUEST FOR APPROVAL OF RELIABILITY STANDARDS**

A. **Background: NERC Quarterly Filing of Proposed Reliability Standards**

Pursuant to Section 215 of the Federal Power Act (“FPA”),² NERC was certified by the Commission as the Electric Reliability Organization (“ERO”) in the United States.³ Under FPA Section 215, the ERO is charged with developing and enforcing mandatory Reliability Standards in the United States, subject to Commission approval. Section 215(b)(1) of the FPA states that all users, owners, and operators of the Bulk-Power System in the United States will be subject to Commission-approved Reliability Standards. Section 215(d)(5) of the FPA authorizes the Commission to order the ERO to submit a new or modified Reliability Standard and Section 39.5(a) of the Commission’s regulations requires the ERO to file for Commission approval each Reliability Standard that the ERO proposes should become mandatory and enforceable in the

¹ The list of Reliability Standards and the *NERC Glossary* in **Exhibit B** and **Exhibit C**, respectively, were generated on or around the date of this filing, and, given the quarterly schedule on which this application is filed, these lists may include standards and definitions that became effective or were approved after the final day of the previous quarter. Only those standards and definitions highlighted for NSUARB in the present quarterly application and all previous applications should be considered for purposes of this application.

² 16 U.S.C. § 824o(f) (2012) (entrusting FERC with the duties of approving and enforcing rules in the U.S. to ensure the reliability of the Nation’s Bulk-Power System, and with the duties of certifying an Electric Reliability Organization to develop mandatory and enforceable Reliability Standards, subject to FERC review and approval).

³ *Order Certifying North American Electric Reliability Corporation as the Electric Reliability Organization and Ordering Compliance Filing*, 116 FERC ¶ 61,062 (2006), *order on reh’g and compliance*, 117 FERC ¶ 61,126 (2006), *aff’d sub nom. Alcoa Inc. v. FERC*, 564 F.3d 342 (D.C. Cir. 2009).

United States, and each modification to a Reliability Standard that the ERO proposes to make effective in the United States. Some or all of NERC’s Reliability Standards are also mandatory in the Canadian provinces of Alberta, British Columbia, Manitoba, New Brunswick, Nova Scotia, Ontario, Québec, and Saskatchewan.

NERC entered into a Memorandum of Understanding (“MOU”) with the NSUARB,⁴ and a separate MOU with Nova Scotia Power Incorporated (“NSPI”) and the Northeast Power Coordinating Council, Inc. (“NPCC”),⁵ to provide reliability services to Nova Scotia. These MOUs became effective on December 22, 2006 and May 11, 2010, respectively. The December 22, 2006 MOU memorializes the relationship between NERC and the NSUARB formed to improve the reliability of the North American BPS. The May 11, 2010 MOU sets forth the mutual understandings of NERC, NSPI, and NPCC regarding the approval and implementation of NERC Reliability Standards and NPCC Regional Reliability Criteria in Nova Scotia and other related matters.

On June 30, 2010, NERC submitted its first set of Reliability Standards and the *NERC Glossary* to the NSUARB, and on July 20, 2011, NSUARB issued a decision approving these documents.⁶ In that decision, the NSUARB approved a “quarterly review” process for considering new and amended NERC Reliability Standards and criteria⁷ and ordered that “applications will not be processed by the Board until [FERC] has approved or remanded the

⁴ See Memorandum of Understanding between Nova Scotia Utility and Review Board and North American Electric Reliability Corporation (signed Dec. 22, 2006).

⁵ See Memorandum of Understanding between Nova Scotia Power Incorporated and the Northeast Power Coordinating Council, Inc. and the North American Electric Reliability Corporation (signed May 11, 2010).

⁶ In the Matter of an Application by North American Electric Reliability Corporation for Approval of its Reliability Standards, and an application by Northeast Power Coordinating Council, Inc. for Approval of its Regional Reliability Criteria, NSUARB-ERC-R-10 (July 20, 2011) (“NSUARB Decision”).

⁷ Id. at P 30.

standards in the United States.”⁸ The NSUARB Decision also stated that NSUARB approval is not required for the Violation Risk Factors (“VRFs”) and Violation Severity Levels (VSLs”) associated with proposed Reliability Standards, but the NSUARB noted that it will accept VRFs and VSLs as guidance.⁹

Based on the NSUARB Decision, NERC applications to the NSUARB only request approval for those Reliability Standards and *NERC Glossary* definitions approved by FERC during the previous quarter. NERC does not seek formal approval of VRFs and VSLs associated with the Reliability Standards submitted in its quarterly applications. Rather, for informational purposes and for guidance, NERC provides a link to the FERC-approved VRFs and VSLs associated with NERC Reliability Standards.¹⁰ NERC does not include in its applications the full developmental record for the standards, which consists of the draft standards, comments received, responses to the comments by the drafting teams, and the full voting record, because the record for each standard may consist of several thousand pages. NERC will make the full developmental records available to the NSUARB or other interested parties upon request.

B. Overview of NERC Reliability Standards Development Process

NERC Reliability Standards define the requirements for reliably planning and operating the North American BPS. These standards are developed by industry stakeholders using a balanced, open, fair, and inclusive process managed by the NERC Standards Committee. The Standards Committee is facilitated by NERC staff and comprised of representatives from ten electricity stakeholder segments. Stakeholders, through a balloting process, approve the

⁸ *Id.*

⁹ *Id.* at P 33.

¹⁰ NERC’s VRF Matrix and VSL Matrix are available at: <http://www.nerc.com/pa/Stand/Pages/AllReliabilityStandards.aspx?jurisdiction=United%20States>. See left-hand side of webpage for downloadable documents.

Reliability Standards prior to the standards being adopted by the NERC Board of Trustees and approved by applicable governmental authorities.

NERC develops Reliability Standards and associated definitions in accordance with Section 300 (Reliability Standards Development) and Appendix 3A (Standards Processes Manual) of its Rules of Procedure.¹¹ NERC's Reliability Standards development process has been approved by the American National Standards Institute as being open, inclusive, balanced, and fair. The *NERC Glossary*, most recently updated January 31, 2018, contains each term that is defined for use in one or more of NERC's continent-wide or regional Reliability Standards approved by the NERC Board of Trustees. NERC submits the *NERC Glossary* as **Exhibit C** of this application for informational purposes only.

C. Description of Proposed Reliability Standards, First Quarter 2018

As provided in the table below, during the first quarter of 2018, FERC issued an order approving revised Emergency Preparedness and Operations ("EOP") Reliability Standards EOP-004-4, EOP-005-3, EOP-006-3, and EOP-008-2.¹² No other Reliability Standards were approved during the first quarter of 2018 and none of the approved standards included newly defined or revised *NERC Glossary* terms.

Reliability Standard	Effective Date
Emergency Preparedness and Operations (EOP) Standards	
EOP-004-4*	4/1/2019
EOP-005-3*	4/1/2019
EOP-006-3*	4/1/2019
EOP-008-2*	4/1/2019

* At the time of this filing, all standards marked with an asterisk are not yet effective, but have been approved by FERC and have a future mandatory effective date.

¹¹ The NERC *Rules of Procedure* are available at: <http://www.nerc.com/AboutNERC/Pages/Rules-of-Procedure.aspx>.

¹² *Emergency Preparedness and Operations Reliability Standards*, Order No. 840, 162 FERC ¶ 61,020 (2018).

1. EOP Reliability Standards

On January 18, 2018, FERC issued a final rule approving: (i) revised EOP Reliability Standards EOP-004-4 (Event Reporting); EOP-005-3 (System Restoration from Blackstart Resources); EOP-006-3 (System Restoration Coordination); and EOP-008-2 (Loss of Control Center Functionality); (ii) the associated VRFs and VSLs; (iii) the associated implementation plans; (iv) effective dates; and (v) the retirement of currently-effective Reliability Standards EOP-004-3, EOP-005-2, EOP-006-2, and EOP-008-1.

These Reliability Standards provide for the accurate reporting of events to NERC's event analysis group to analyze the impact on the reliability of the Bulk Electric System ("BES") (EOP-004-4); delineate the roles and responsibilities of entities that support system restoration from blackstart resources (EOP-005-3); clarify the procedures and coordination requirements for reliability coordinator personnel to execute system restoration processes (EOP-006-3); and, refine the required elements of an operating plan used to continue reliable operations of the BES if that primary control functionality is lost (EOP-008-2). The modifications to the EOP Reliability Standards are designed to eliminate redundant reporting of a single event by multiple entities, assign reporting requirements to appropriate entities, and clarify the threshold reporting for a given event.

III. CONCLUSION

NERC respectfully requests that the NSUARB approve the Reliability Standards as specified herein.

Respectfully submitted,

/s/ Shamai Elstein

Shamai Elstein
Senior Counsel
North American Electric Reliability Corporation
1325 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 400-3000
shamai.elstein@nerc.net

Counsel for the North American Electric Reliability Corporation

Date: May 31, 2018

Exhibit A (1): Reliability Standard Applicable to Nova Scotia, Approved by FERC in First Quarter 2018

Reliability Standard	Effective Date
Emergency Preparedness and Operations (EOP) Standards	
EOP-004-4*	4/1/2019
EOP-005-3*	4/1/2019
EOP-006-3*	4/1/2019
EOP-008-2*	4/1/2019

* At the time of this filing, all standards marked with an asterisk are not yet effective, but have been approved by FERC and have a future mandatory effective date.

Exhibit A (2): Informational Summary of Reliability Standard Applicable to Nova Scotia, Approved by FERC in First Quarter 2018

Reliability Standard EOP-004-4	
Purpose	To improve the reliability of the Bulk Electric System by requiring the reporting of events by Responsible Entities.
Applicability	<ul style="list-style-type: none"> • Reliability Coordinators • Balancing Authorities • Transmission Owners • Transmission Operators • Generator Owners • Generator Operators • Distribution Providers
Requirements	Reliability Standard EOP-004-4 includes two requirements and a flow chart.
Date of Petition and FERC Order	Petition filed on March 27, 2017 for approval of proposed Emergency Operations ("EOP") Reliability Standards with the Federal Energy Regulatory Commission ("FERC") in Docket No. RM17-12-000. FERC approved the EOP standards on January 18, 2018.

Reliability Standard EOP-005-3	
Purpose	Ensure plans, Facilities, and personnel are prepared to enable System restoration from Blackstart Resources to ensure reliability is maintained during restoration and priority is placed on restoring the Interconnection.
Applicability	<ul style="list-style-type: none"> • Transmission Operators • Generator Operators • Transmission Owners identified in the Transmission Operators restoration plan • Distribution Providers identified in the Transmission Operators restoration plan
Requirements	Reliability Standard EOP-005-3 includes sixteen requirements.
Date of Petition and FERC Order	Petition filed on March 27, 2017 for approval of proposed EOP Reliability Standards with FERC in Docket No. RM17-12-000. FERC approved the EOP standards on January 18, 2018.

Exhibit A (2): Informational Summary of Reliability Standard Applicable to Nova Scotia, Approved by FERC in First Quarter 2018

Reliability Standard EOP-006-3	
Purpose	Ensure plans are established and personnel are prepared to enable effective coordination of the System restoration process to ensure reliability is maintained during restoration and priority is placed on restoring the Interconnection.
Applicability	<ul style="list-style-type: none"> • Reliability Coordinators
Requirements	Reliability Standard EOP-006-3 includes eight requirements.
Date of Petition and FERC Order	Petition filed on March 27, 2017 for approval of proposed EOP Reliability Standards with FERC in Docket No. RM17-12-000. FERC approved the EOP standards on January 18, 2018.

Reliability Standard EOP-008-2	
Purpose	Ensure continued reliable operations of the Bulk Electric System (BES) in the event that a control center becomes inoperable.
Applicability	<ul style="list-style-type: none"> • Reliability Coordinators • Transmission Operators • Balancing Authorities
Requirements	Reliability Standard EOP-008-2 includes eight requirements.
Date of Petition and FERC Order	Petition filed on March 27, 2017 for approval of proposed EOP Reliability Standards with FERC in Docket No. RM17-12-000. FERC approved the EOP standards on January 18, 2018.

Exhibit A (3): Reliability Standard Filed for Approval

Reliability Standard EOP-004-4

A. Introduction

1. **Title:** Event Reporting
2. **Number:** EOP-004-4
3. **Purpose:** To improve the reliability of the Bulk Electric System by requiring the reporting of events by Responsible Entities.
4. **Applicability:**
 - 4.1. **Functional Entities:** For the purpose of the Requirements and the EOP-004 Attachment 1 contained herein, the following Functional Entities will be collectively referred to as “Responsible Entity.”
 - 4.1.1. Reliability Coordinator
 - 4.1.2. Balancing Authority
 - 4.1.3. Transmission Owner
 - 4.1.4. Transmission Operator
 - 4.1.5. Generator Owner
 - 4.1.6. Generator Operator
 - 4.1.7. Distribution Provider
5. **Effective Date:** See the Implementation Plan for EOP-004-4.

B. Requirements and Measures

- R1. Each Responsible Entity shall have an event reporting Operating Plan in accordance with EOP-004-4 Attachment 1 that includes the protocol(s) for reporting to the Electric Reliability Organization and other organizations (e.g., the Regional Entity, company personnel, the Responsible Entity’s Reliability Coordinator, law enforcement, or governmental authority). *[Violation Risk Factor: Lower] [Time Horizon: Operations Planning]*
- M1. Each Responsible Entity will have a dated event reporting Operating Plan that includes protocol(s) and each organization identified to receive an event report for event types specified in EOP-004-4 Attachment 1 and in accordance with the entity responsible for reporting.
- R2. Each Responsible Entity shall report events specified in EOP-004-4 Attachment 1 to the entities specified per their event reporting Operating Plan by the later of 24 hours of recognition of meeting an event type threshold for reporting or by the end of the Responsible Entity’s next business day (4 p.m. local time will be considered the end of the business day). *[Violation Risk Factor: Medium] [Time Horizon: Operations Assessment]*

M2. Each Responsible Entity will have as evidence of reporting an event to the entities specified per their event reporting Operating Plan either a copy of the completed EOP-004-4 Attachment 2 form or a DOE-OE-417 form; and some evidence of submittal (e.g., operator log or other operating documentation, voice recording, electronic mail message, or confirmation of facsimile) demonstrating that the event report was submitted by the later of 24 hours of recognition of meeting an event type threshold for reporting or by the end of the Responsible Entity's next business day (4 p.m. local time will be considered the end of the business day).

C. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority:

“Compliance Enforcement Authority” means NERC or the Regional Entity, or any entity as otherwise designated by an Applicable Governmental Authority, in their respective roles of monitoring and/or enforcing compliance with mandatory and enforceable Reliability Standards in their respective jurisdictions.

1.2. Evidence Retention:

The Responsible Entity shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

The following evidence retention periods identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

- Each Responsible Entity shall retain the current Operating Plan plus each version issued since the last audit for Requirement R1, and Measure M1.
- Each Responsible Entity shall retain evidence of compliance since the last audit for Requirement R2 and Measure M2.

If a Responsible Entity is found non-compliant, it shall keep information related to the non-compliance until mitigation is complete and approved or for the duration specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Enforcement Program

As defined in the NERC Rules of Procedure, “Compliance Monitoring and Enforcement Program” refers to the identification of the processes that will be used to evaluate data or information for the purpose of assessing performance or outcomes with the associated Reliability Standard.

Violation Severity Levels

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1.	The Responsible Entity had an event reporting Operating Plan, but failed to include one applicable event type.	The Responsible Entity had an event reporting Operating Plan, but failed to include two applicable event types.	The Responsible Entity had an event reporting Operating Plan, but failed to include three applicable event types.	The Responsible Entity had an event reporting Operating Plan, but failed to include four or more applicable event types. OR The Responsible Entity failed to have an event reporting Operating Plan.
R2.	The Responsible Entity submitted an event report (e.g., written or verbal) to all required recipients up to 24 hours after the timing requirement for submittal. OR The Responsible Entity failed to submit an event report (e.g., written or verbal) to one entity identified in its event reporting Operating Plan within 24 hours or by the end of the next business day, as applicable.	The Responsible Entity submitted an event report (e.g., written or verbal) to all required recipients more than 24 hours but less than or equal to 48 hours after the timing requirement for submittal. OR The Responsible Entity failed to submit an event report (e.g., written or verbal) to two entities identified in its event reporting Operating Plan within 24 hours or by	The Responsible Entity submitted an event report (e.g., written or verbal) to all required recipients more than 48 hours but less than or equal to 72 hours after the timing requirement for submittal. OR The Responsible Entity failed to submit an event report (e.g., written or verbal) to three entities identified in its event reporting Operating Plan within 24 hours or by	The Responsible Entity submitted an event report (e.g., written or verbal) to all required recipients more than 72 hours after the timing requirement for submittal. OR The Responsible Entity failed to submit an event report (e.g., written or verbal) to four or more entities identified in its event reporting Operating Plan within 24 hours or by the

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
		the end of the next business day, as applicable.	the end of the next business day, as applicable.	end of the next business day, as applicable. OR The Responsible Entity failed to submit a report for an event in EOP-004-4 Attachment 1.

D. Regional Variances

None.

E. Associated Documents

[Link](#) to the Implementation Plan and other important associated documents.

EOP-004 - Attachment 1: Reportable Events

NOTE: Under certain adverse conditions (e.g. severe weather, multiple events) it may not be possible to report the damage caused by an event and issue a written event report within the timing in the standard. In such cases, the affected Responsible Entity shall notify parties per Requirement R2 and provide as much information as is available at the time of the notification. Submit reports to the ERO via one of the following: e-mail: systemawareness@nerc.net, Facsimile 404-446-9770 or Voice: 404-446-9780, select Option 1.

Submit EOP-004 Attachment 2 (or DOE-OE-417) pursuant to Requirements R1 and R2.

Rationale for Attachment 1:

System-wide voltage reduction to maintain the continuity of the BES: The TOP is operating the system and is the only entity that would implement system-wide voltage reduction.

Complete loss of Interpersonal Communication and Alternative Interpersonal Communication capability at a BES control center: To align EOP-004-4 with COM-001-2.1. COM-001-2.1 defined Interpersonal Communication for the NERC Glossary of Terms as: "Any medium that allows two or more individuals to interact, consult, or exchange information." The NERC Glossary of Terms defines Alternative Interpersonal Communication as: "Any Interpersonal Communication that is able to serve as a substitute for, and does not utilize the same infrastructure (medium) as, Interpersonal Communication used for day-to-day operation."

Complete loss of monitoring or control capability at a BES control center: Language revisions to: "Complete loss of monitoring or control capability at a BES control center for 30 continuous minutes or more" provides clarity to the "Threshold for Reporting" and better aligns with the ERO Event Analysis Process.

Event Type	Entity with Reporting Responsibility	Threshold for Reporting
Damage or destruction of a Facility	RC, BA, TOP	Damage or destruction of a Facility within its Reliability Coordinator Area, Balancing Authority Area or Transmission Operator Area that results in action(s) to avoid a BES Emergency.

Event Type	Entity with Reporting Responsibility	Threshold for Reporting
Damage or destruction of its Facility	TO, TOP, GO, GOP, DP	<p>Damage or destruction of its Facility that results from actual or suspected intentional human action.</p> <p>It is not necessary to report theft unless it degrades normal operation of its Facility.</p>
Physical threats to its Facility	TO, TOP, GO, GOP, DP	<p>Physical threat to its Facility excluding weather or natural disaster related threats, which has the potential to degrade the normal operation of the Facility.</p> <p>OR</p> <p>Suspicious device or activity at its Facility.</p>
Physical threats to its BES control center	RC, BA, TOP	<p>Physical threat to its BES control center, excluding weather or natural disaster related threats, which has the potential to degrade the normal operation of the control center.</p> <p>OR</p> <p>Suspicious device or activity at its BES control center.</p>
Public appeal for load reduction resulting from a BES Emergency	BA	Public appeal for load reduction to maintain continuity of the BES.
System-wide voltage reduction resulting from a BES Emergency	TOP	System-wide voltage reduction of 3% or more.
Firm load shedding resulting from a BES Emergency	Initiating RC, BA, or TOP	Firm load shedding \geq 100 MW (manual or automatic).

Event Type	Entity with Reporting Responsibility	Threshold for Reporting
BES Emergency resulting in voltage deviation on a Facility	TOP	A voltage deviation of =/> 10% of nominal voltage sustained for ≥ 15 continuous minutes.
Uncontrolled loss of firm load resulting from a BES Emergency	BA, TOP, DP	<p>Uncontrolled loss of firm load for ≥ 15 minutes from a single incident:</p> <p>≥ 300 MW for entities with previous year's peak demand ≥ 3,000 MW</p> <p>OR</p> <p>≥ 200 MW for all other entities</p>
System separation (islanding)	RC, BA, TOP	Each separation resulting in an island ≥ 100 MW
Generation loss	BA	<p>Total generation loss, within one minute, of:</p> <p>≥ 2,000 MW in the Eastern, Western, or Quebec Interconnection</p> <p>OR</p> <p>≥ 1,400 MW in the ERCOT Interconnection</p> <p>Generation loss will be used to report Forced Outages not weather patterns or fuel supply unavailability for dispersed power producing resources.</p>

Event Type	Entity with Reporting Responsibility	Threshold for Reporting
Complete loss of off-site power to a nuclear generating plant (grid supply)	TO, TOP	Complete loss of off-site power (LOOP) affecting a nuclear generating station per the Nuclear Plant Interface Requirements
Transmission loss	TOP	Unexpected loss within its area, contrary to design, of three or more BES Facilities caused by a common disturbance (excluding successful automatic reclosing).
Unplanned evacuation of its BES control center	RC, BA, TOP	Unplanned evacuation from its BES control center facility for 30 continuous minutes or more.
Complete loss of Interpersonal Communication and Alternative Interpersonal Communication capability at its staffed BES control center	RC, BA, TOP	Complete loss of Interpersonal Communication and Alternative Interpersonal Communication capability affecting its staffed BES control center for 30 continuous minutes or more.
Complete loss of monitoring or control capability at its staffed BES control center	RC, BA, TOP	Complete loss of monitoring or control capability at its staffed BES control center for 30 continuous minutes or more.

EOP-004 - Attachment 2: Event Reporting Form

EOP-004 Attachment 2: Event Reporting Form

Use this form to report events. The Electric Reliability Organization will accept the DOE OE-417 form in lieu of this form if the entity is required to submit an OE-417 report. Submit reports to the ERO via one of the following: e-mail: systemawareness@nerc.net, Facsimile 404-446-9770 or voice: 404-446-9780, Option 1. Also submit to other applicable organizations per Requirement R1 "... (e.g., the Regional Entity, company personnel, the Responsible Entity's Reliability Coordinator, law enforcement, or Applicable Governmental Authority)."

Task		Comments
1.	Entity filing the report include: Company name: Name of contact person: Email address of contact person: Telephone Number: Submitted by (name):	
2.	Date and Time of recognized event. Date: (mm/dd/yyyy) Time: (hh:mm) Time/Zone:	
3.	Did the event originate in your system?	Yes <input type="checkbox"/> No <input type="checkbox"/> Unknown <input type="checkbox"/>
4.	Event Identification and Description: (Check applicable box) <ul style="list-style-type: none"> <input type="checkbox"/> Damage or destruction of a Facility <input type="checkbox"/> Physical threat to its Facility <input type="checkbox"/> Physical threat to its BES control center <input type="checkbox"/> BES Emergency: <ul style="list-style-type: none"> <input type="checkbox"/> firm load shedding <input type="checkbox"/> public appeal for load reduction <input type="checkbox"/> System-wide voltage reduction <input type="checkbox"/> voltage deviation on a Facility <input type="checkbox"/> uncontrolled loss of firm load <input type="checkbox"/> System separation (islanding) <input type="checkbox"/> Generation loss <input type="checkbox"/> Complete loss of off-site power to a nuclear generating plant (grid supply) <input type="checkbox"/> Transmission loss <input type="checkbox"/> Unplanned evacuation of its BES control center <input type="checkbox"/> Complete loss of Interpersonal Communication and Alternative Interpersonal Communication capability at its staffed BES control center <input type="checkbox"/> Complete loss of monitoring or control capability at its staffed BES control center Written description (optional):	

Version History

Version	Date	Action	Change Tracking
2		Merged CIP-001-2a Sabotage Reporting and EOP-004-1 Disturbance Reporting into EOP-004-2 Event Reporting; Retire CIP-001-2a Sabotage Reporting and Retired EOP-004-1 Disturbance Reporting.	Revision to entire standard (Project 2009-01)
2	November 7, 2012	Adopted by the NERC Board of Trustees	
2	June 20, 2013	FERC approved	
3	November 13, 2014	Adopted by the NERC Board of Trustees	Replaced references to Special protection System and SPS with Remedial Action Scheme and RAS
3	November 19, 2015	FERC Order issued approving EOP-004-3. Docket No. RM15-13-000.	
4	February 9, 2017	Adopted by the NERC Board of Trustees	Revised
4	January 18, 2018	FERC order issued approving EOP-004-4. Docket No. RM17-12-000	

Guideline and Technical Basis

Multiple Reports for a Single Organization

For entities that have multiple registrations, the requirement is that these entities will only have to submit one report for any individual event. For example, if an entity is registered as a Reliability Coordinator, Balancing Authority and Transmission Operator, the entity would only submit one report for a particular event rather submitting three reports as each individual registered entity.

Law Enforcement Reporting


The reliability objective of EOP-004-4 is to improve the reliability of the Bulk Electric System by requiring the reporting of events by Responsible Entities. Certain outages, such as those due to vandalism and terrorism, may not be reasonably preventable. These are the types of events that should be reported to law enforcement. Entities rely upon law enforcement agencies to respond to and investigate those events which have the potential to impact a wider area of the BES. The inclusion of reporting to law enforcement enables and supports reliability principles such as protection of Bulk Electric System from malicious physical attack. The importance of BES awareness of the threat around them is essential to the effective operation and planning to mitigate the potential risk to the BES.

Stakeholders in the Reporting Process

- Industry
- NERC (ERO), Regional Entity
- FERC
- DOE
- NRC
- DHS – Federal
- Homeland Security- State
- State Regulators
- Local Law Enforcement
- State or Provincial Law Enforcement
- FBI
- Royal Canadian Mounted Police (RCMP)

The above stakeholders have an interest in the timely notification, communication and response to an incident at a Facility. The stakeholders have various levels of accountability and have a vested interest in the protection and response to ensure the reliability of the BES.

Example of Reporting Process including Law Enforcement

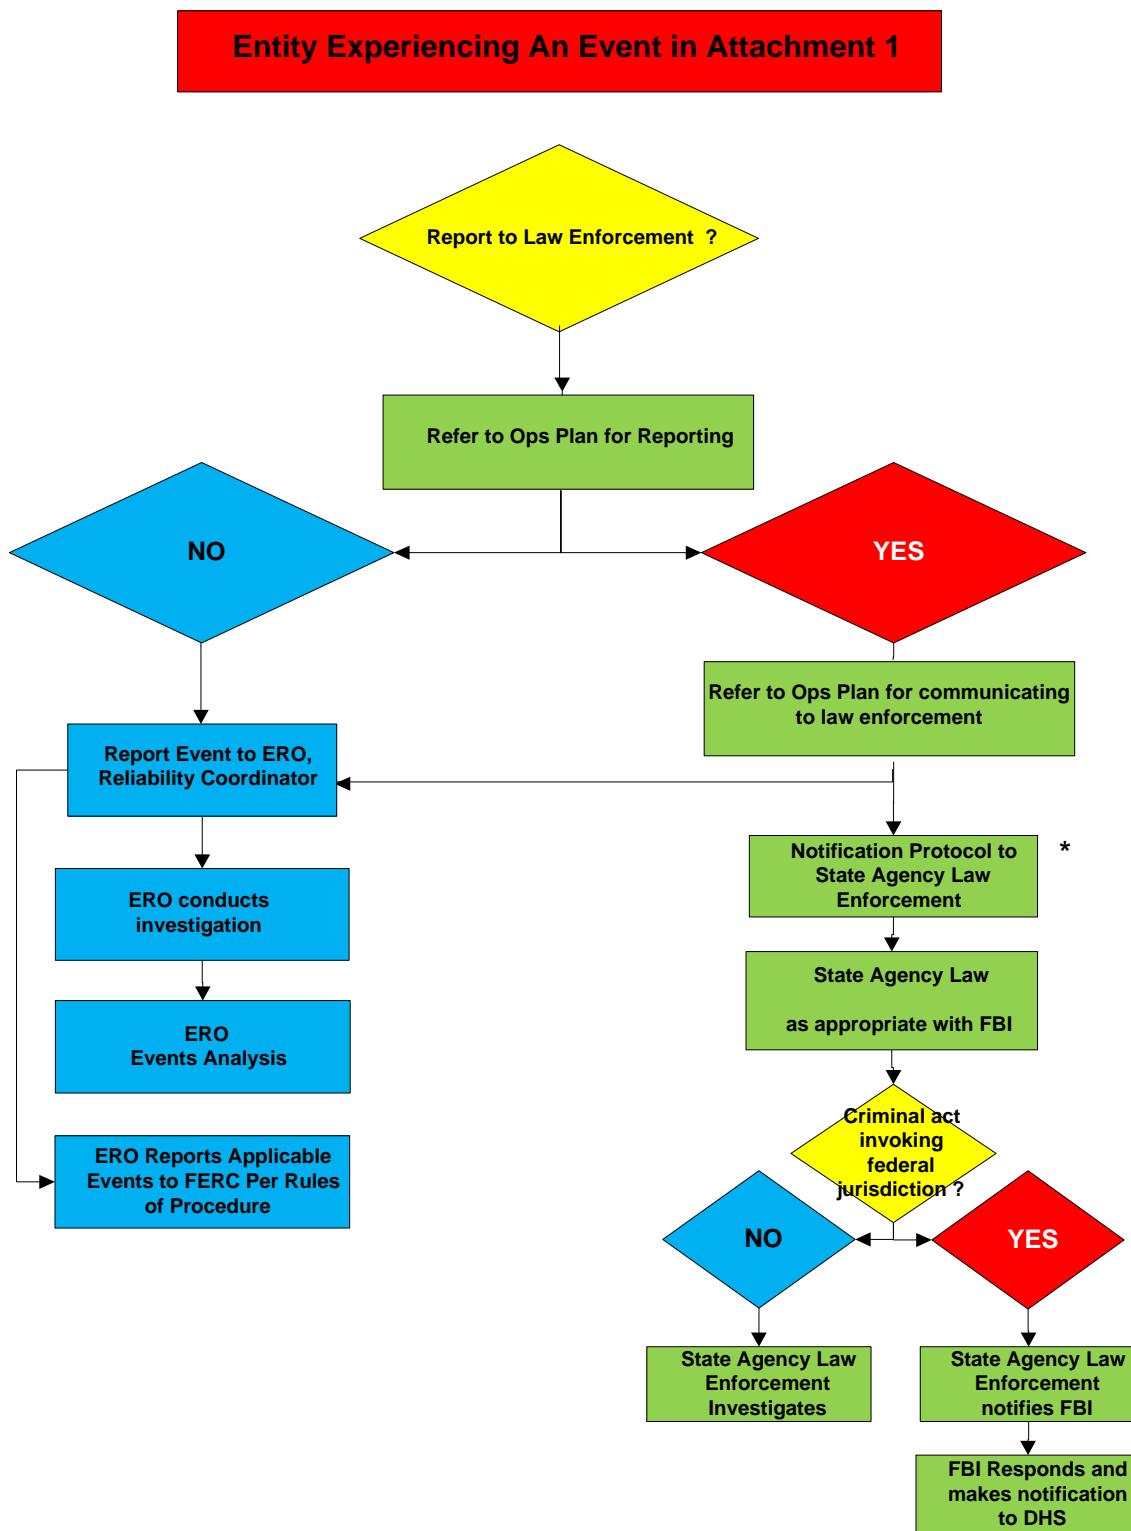

* Canadian entities will follow law enforcement protocols applicable in their jurisdictions

Supplemental Material

Potential Uses of Reportable Information

General situational awareness, correlation of data, trend identification, and identification of potential events of interest for further analysis in the ERO Event Analysis Process are a few potential uses for the information reported under this standard. The standard requires Functional Entities to report the incidents and provide information known at the time of the report. Further data gathering necessary for analysis is provided for under the ERO Event Analysis Program and the NERC Rules of Procedure. The [NERC Rules of Procedure \(section 800\)](#) provide an overview of the responsibilities of the ERO in regards to analysis and dissemination of information for reliability. Jurisdictional agencies (which may include DHS, FBI, NERC, RE, FERC, Provincial Regulators, and DOE) have other duties and responsibilities.

*** FOR INFORMATIONAL PURPOSES ONLY ***

Effective Date of Standard: EOP-004-4 — Event Reporting

United States

Standard	Requirement	Effective Date of Standard	Phased In Implementation Date (if applicable)	Inactive Date
EOP-004-4	All	04/01/2019		

Reliability Standard EOP-005-3

A. Introduction

1. **Title:** System Restoration from Blackstart Resources
2. **Number:** EOP-005-3
3. **Purpose:** Ensure plans, Facilities, and personnel are prepared to enable System restoration from Blackstart Resources to ensure reliability is maintained during restoration and priority is placed on restoring the Interconnection.
4. **Applicability:**
 - 4.1. **Functional Entities:**
 - 4.1.1. Transmission Operators
 - 4.1.2. Generator Operators
 - 4.1.3. Transmission Owners identified in the Transmission Operators restoration plan
 - 4.1.4. Distribution Providers identified in the Transmission Operators restoration plan
5. **Effective Date:** See the Implementation Plan for EOP-005-3.
6. **Standard-Only Definition:** None

B. Requirements and Measures

- R1.** Each Transmission Operator shall develop and implement a restoration plan approved by its Reliability Coordinator. The restoration plan shall be implemented to restore the Transmission Operator's System following a Disturbance in which one or more areas of the Bulk Electric System (BES) shuts down and the use of Blackstart Resources is required to restore the shutdown area to a state whereby the choice of the next Load to be restored is not driven by the need to control frequency or voltage regardless of whether the Blackstart Resource is located within the Transmission Operator's System. The restoration plan shall include: *[Violation Risk Factor = High]* *[Time Horizon = Operations Planning, Real-time Operations]*
- 1.1. Strategies for System restoration that are coordinated with its Reliability Coordinator's high level strategy for restoring the Interconnection.
 - 1.2. A description of how all Agreements or mutually-agreed upon procedures or protocols for off-site power requirements of nuclear power plants, including priority of restoration, will be fulfilled during System restoration.
 - 1.3. Procedures for restoring interconnections with other Transmission Operators under the direction of its Reliability Coordinator.
 - 1.4. Identification of each Blackstart Resource and its characteristics including but not limited to the following: the name of the Blackstart Resource, location, megawatt and megavar capacity, and type of unit.

- 1.5.** Identification of Cranking Paths and initial switching requirements between each Blackstart Resource and the unit(s) to be started.
 - 1.6.** Identification of acceptable operating voltage and frequency limits during restoration.
 - 1.7.** Operating Processes to reestablish connections within the Transmission Operator's System for areas that have been restored and are prepared for reconnection.
 - 1.8.** Operating Processes to restore Loads required to restore the System, such as station service for substations, units to be restarted or stabilized, the Load needed to stabilize generation and frequency, and provide voltage control.
 - 1.9.** Operating Processes for transferring operations back to the Balancing Authority in accordance with its Reliability Coordinator's criteria.
- M1.** Each Transmission Operator shall have a dated, documented System restoration plan developed in accordance with Requirement R1 that has been approved by its Reliability Coordinator as shown with the documented approval from its Reliability Coordinator and will have evidence, such as operator logs, voice recordings or other operating documentation, voice recordings or other communication documentation to show that its restoration plan was implemented for times when a Disturbance has occurred, in accordance with Requirement R1.
- R2.** Each Transmission Operator shall provide the entities identified in its approved restoration plan with a description of any changes to their roles and specific tasks prior to the effective date of the plan. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- M2.** Each Transmission Operator shall have evidence such as dated electronic receipts or registered mail receipts that it provided the entities identified in its approved restoration plan with a description of any changes to their roles and specific tasks prior to the effective date of the plan in accordance with Requirement R2.
- R3.** Each Transmission Operator shall review its restoration plan and submit it to its Reliability Coordinator annually on a mutually-agreed, predetermined schedule. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- M3.** Each Transmission Operator shall have documentation such as a dated review signature sheet, revision histories, dated electronic receipts, or registered mail receipts, that it has annually reviewed and submitted the Transmission Operator's restoration plan to its Reliability Coordinator in accordance with Requirement R3.
- R4.** Each Transmission Operator shall submit its revised restoration plan to its Reliability Coordinator for approval, when the revision would change its ability to implement its restoration plan, as follows: *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*

- 4.1.** Within 90 calendar days after identifying any unplanned permanent BES modifications.
 - 4.2.** Prior to implementing a planned permanent BES modification subject to its Reliability Coordinator approval requirements per EOP-006.
- M4.** Each Transmission Operator shall have documentation such as dated review signature sheets, revision histories, dated electronic receipts, or registered mail receipts, that it has submitted the revised restoration plan to its Reliability Coordinator in accordance with Requirement R4.
- R5.** Each Transmission Operator shall have a copy of its latest Reliability Coordinator approved restoration plan within its primary and backup control rooms so that it is available to all of its System Operators prior to its effective date. *[Violation Risk Factor = Lower] [Time Horizon = Operations Planning]*
- M5.** Each Transmission Operator shall have documentation that it has made the latest Reliability Coordinator approved copy of its restoration plan, in electronic or hardcopy format, in its primary and backup control rooms and available to its System Operators prior to its effective date in accordance with Requirement R5.
- R6.** Each Transmission Operator shall verify through analysis of actual events, a combination of steady state and dynamic simulations, or testing that its restoration plan accomplishes its intended function. This shall be completed at least once every five years. Such analysis, simulations or testing shall verify: *[Violation Risk Factor = Medium] [Time Horizon = Long-term Planning]*
- 6.1.** The capability of Blackstart Resources to meet the Real and Reactive Power requirements of the Cranking Paths and the dynamic capability to supply initial Loads.
 - 6.2.** The location and magnitude of Loads required to control voltages and frequency within acceptable operating limits.
 - 6.3.** The capability of generating resources required to control voltages and frequency within acceptable operating limits.
- M6.** Each Transmission Operator shall have documentation, such as power flow outputs, that it has verified that its latest restoration plan will accomplish its intended function in accordance with Requirement R6.
- R7.** Each Transmission Operator shall have Blackstart Resource testing requirements to verify that each Blackstart Resource is capable of meeting the requirements of its restoration plan. These Blackstart Resource testing requirements shall include: *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- 7.1.** The frequency of testing such that each Blackstart Resource is tested at least once every three calendar years.
 - 7.2.** A list of required tests including:

- 7.2.1.** The ability to start the unit when isolated with no support from the BES or when designed to remain energized without connection to the remainder of the System.
 - 7.2.2.** The ability to energize a bus. If it is not possible to energize a bus during the test, the testing entity must affirm that the unit has the capability to energize a bus such as verifying that the breaker close coil relay can be energized with the voltage and frequency monitor controls disconnected from the synchronizing circuits.
- 7.3.** The minimum duration of each of the required tests.
- M7.** Each Transmission Operator shall have documented Blackstart Resource testing requirements in accordance with Requirement R7.
- R8.** Each Transmission Operator shall include within its operations training program, annual System restoration training for its System Operators. This training program shall include training on the following: *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- 8.1.** System restoration plan including coordination with its Reliability Coordinator and Generator Operators included in the restoration plan.
 - 8.2.** Restoration priorities.
 - 8.3.** Building of cranking paths.
 - 8.4.** Synchronizing (re-energized sections of the System).
 - 8.5.** Transition of Demand and resource balance within its area to the Balancing Authority.
- M8.** Each Transmission Operator shall have an electronic or hard copy of the training program material provided for its System Operators for System restoration training in accordance with Requirement R8.
- R9.** Each Transmission Operator, each applicable Transmission Owner, and each applicable Distribution Provider shall provide a minimum of two hours of System restoration training every two calendar years to their field switching personnel identified as performing unique tasks associated with the Transmission Operator's restoration plan that are outside of their normal tasks. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- M9.** Each Transmission Operator, each applicable Transmission Owner, and each applicable Distribution Provider shall have an electronic or hard copy of the training program material provided to their field switching personnel for System restoration training and the corresponding training records including training dates and duration in accordance with Requirement R9.

- R10.** Each Transmission Operator shall participate in its Reliability Coordinator's restoration drills, exercises, or simulations as requested by its Reliability Coordinator. [Violation Risk Factor = Medium] [Time Horizon = Operations Planning]
- M10.** Each Transmission Operator shall have evidence that it participated in its Reliability Coordinator's restoration drills, exercises, or simulations as requested in accordance with Requirement R10.
- R11.** Each Transmission Operator and each Generator Operator with a Blackstart Resource shall have written Blackstart Resource Agreements or mutually agreed upon procedures or protocols, specifying the terms and conditions of their arrangement. Such Agreements shall include references to the Blackstart Resource testing requirements. [Violation Risk Factor = Medium] [Time Horizon = Operations Planning]
- M11.** Each Transmission Operator and Generator Operator with a Blackstart Resource shall have the dated Blackstart Resource Agreements or mutually agreed upon procedures or protocols in accordance with Requirement R11.
- R12.** Each Generator Operator with a Blackstart Resource shall have documented procedures for starting each Blackstart Resource and energizing a bus. [Violation Risk Factor = Medium] [Time Horizon = Operations Planning]
- M12.** Each Generator Operator with a Blackstart Resource shall have dated documented procedures on file for starting each unit and energizing a bus in accordance with Requirement R12.
- R13.** Each Generator Operator with a Blackstart Resource shall notify its Transmission Operator of any known changes to the capabilities of that Blackstart Resource affecting the ability to meet the Transmission Operator's restoration plan within 24 hours following such change. [Violation Risk Factor = Medium] [Time Horizon = Operations Planning]
- M13.** Each Generator Operator with a Blackstart Resource shall provide evidence, such as dated electronic receipts or registered mail receipts, showing that it notified its Transmission Operator of any known changes to its Blackstart Resource capabilities within 24 hours of such changes in accordance with Requirement R13.
- R14.** Each Generator Operator with a Blackstart Resource shall perform Blackstart Resource tests, and maintain records of such testing, in accordance with the testing requirements set by the Transmission Operator to verify that the Blackstart Resource can perform as specified in the restoration plan. [Violation Risk Factor = Medium] [Time Horizon = Operations Planning]
- 14.1.** Testing records shall include at a minimum: name of the Blackstart Resource, unit tested, date of the test, duration of the test, time required to start the unit, an indication of any testing requirements not met under Requirement R7.
- 14.2.** Each Generator Operator shall provide the blackstart test results within 30 calendar days following a request from its Reliability Coordinator or Transmission Operator.

- M14.** Each Generator Operator with a Blackstart Resource shall maintain dated documentation of its Blackstart Resource test results and shall have evidence such as e-mails with receipts or registered mail receipts, that it provided these records to its Reliability Coordinator and Transmission Operator when requested in accordance with Requirement R14.
- R15.** Each Generator Operator with a Blackstart Resource shall provide a minimum of two hours of training every two calendar years to each of its operating personnel responsible for the startup of its Blackstart Resource generation units and energizing a bus. The training program shall include training on the following: *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- 15.1.** System restoration plan including coordination with the Transmission Operator
 - 15.2.** The procedures documented in Requirement R12
- M15.** Each Generator Operator with a Blackstart Resource shall have an electronic or hard copy of the training program material provided to its operating personnel responsible for the startup, energizing a bus and synchronization of its Blackstart Resource generation units and a copy of its dated training records including training dates and durations showing that it has provided training in accordance with Requirement R15.
- R16.** Each Generator Operator shall participate in its Reliability Coordinator's restoration drills, exercises, or simulations as requested by its Reliability Coordinator. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- M16.** Each Generator Operator shall have evidence that it participated in its Reliability Coordinator's restoration drills, exercises, or simulations if requested to do so in accordance with Requirement R16.

C. Compliance

1. Compliance Monitoring Process

1.1. **Compliance Enforcement Authority:** Regional Entity

“Compliance Enforcement Authority” means NERC or the Regional Entity, or any entity as otherwise designated by an Applicable Governmental Authority, in their respective roles of monitoring and/or enforcing compliance with mandatory and enforceable Reliability Standards in their respective jurisdictions.

1.2. **Evidence Retention:**

The following evidence retention period(s) identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full-time period since the last audit.

The applicable entity shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation.

The Transmission Operator shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- Approved restoration plan and any restoration plans in effect since the last compliance audit for Requirement R1, Measure M1.
- Provided the entities identified in its approved restoration plan with a description of any changes to their roles and specific tasks prior to the effective date of the plan for the current calendar year and three prior calendar years for Requirement R2, Measure M2.
- Submission of the Transmission Operator's annually-reviewed restoration plan to its Reliability Coordinator for the current calendar year and three prior calendar years for Requirement R3, Measure M3.
- Submission of a revised restoration plan to its Reliability Coordinator for all versions for the current calendar year and the prior three calendar years for Requirement R4, Measure M4.
- The current restoration plan approved by its Reliability Coordinator and any restoration plans for the last three calendar years that was made available in its control rooms for Requirement R5, Measure M5.
- The verification results for the current, approved restoration plan and the previous approved restoration plan for Requirement R6, Measure M6.
- The verification process and results for the current Blackstart Resource testing requirements and the last previous Blackstart Resource testing requirements for Requirement R7, Measure M7.
- Training program materials or descriptions for three calendar years for Requirement R8, Measure M8.
- Records of participation in all requested Reliability Coordinator restoration drills, exercises, or simulations since its last compliance audit, as well as one previous compliance audit period for Requirement R10, Measure M10.

If a Transmission Operator is found non-compliant for any requirement, it shall keep information related to the non-compliance until mitigation is complete and approved or for the time period specified above, whichever is longer. The Transmission Operator, applicable Transmission Owner, and applicable Distribution Provider shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- Training program materials or descriptions and training records for three calendar years for Requirement R9, Measure M9.

If a Transmission Operator, applicable Transmission Owner, or applicable Distribution Provider is found non-compliant for any requirement, it shall keep information related to the non-compliance until mitigation is complete and approved or for the time period specified above, whichever is longer..

The Transmission Operator and Generator Operator with a Blackstart Resource shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- Current Blackstart Resource Agreements and any Blackstart Resource Agreements or mutually agreed upon procedures or protocols in effect since its last compliance audit for Requirement R11, Measure M11.

The Generator Operator with a Blackstart Resource shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- Current documentation and any documentation in effect since its last compliance audit on procedures to start each Blackstart Resource and for energizing a bus for Requirement R12, Measure M12.
- Notification to its Transmission Operator of any known changes to its Blackstart Resource capabilities over the last three calendar years for Requirement R13, Measure M13.
- The verification test results for the current set of requirements and one previous set for its Blackstart Resources for Requirement R14, Measure M14.
- Training program materials and training records for three calendar years for Requirement R15, Measure M15.

If a Generation Operator with a Blackstart Resource is found non-compliant for any requirement, it shall keep information related to the non-compliance until mitigation is complete and approved or for the time period specified above, whichever is longer.

The Generator Operator shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- Records of participation in all requested Reliability Coordinator restoration drills, exercises, or simulations since its last compliance audit for Requirement R16, Measure M16.

If a Generation Operator is found non-compliant for any requirement, it shall keep information related to the non-compliance until mitigation is complete and approved or for the time period specified above, whichever is longer. The Compliance Enforcement Authority shall keep the last compliance audit records and all requested and submitted subsequent compliance audit records.

1.3. Compliance Monitoring and Enforcement Program

As defined in the NERC Rules of Procedure, “Compliance Monitoring and Enforcement Program” refers to the identification of the processes that will be used to evaluate data or information for the purpose of assessing performance or outcomes with the associated Reliability Standard.

Violation Severity Levels

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1.	The Transmission Operator has an approved plan but failed to comply with one of the requirement parts within Requirement R1.	The Transmission Operator has an approved plan but failed to comply with two of the requirement parts within Requirement R1.	The Transmission Operator has an approved plan but failed to comply with three or more of the requirement parts within Requirement R1.	The Transmission Operator does not have an approved restoration plan. OR The Transmission Operator has an approved restoration plan, but failed to implement the applicable requirement parts within Requirement R1.
R2.	The Transmission Operator failed to provide one of the entities identified in its approved restoration plan with a description of any changes to their roles and specific tasks prior to the effective date of the plan.	The Transmission Operator failed to provide two of the entities identified in its approved restoration plan with a description of any changes to their roles and specific tasks prior to the effective date of the plan.	The Transmission Operator failed to provide three of the entities identified in its approved restoration plan with a description of any changes to their roles and specific tasks prior to the effective date of the plan.	The Transmission Operator failed to provide four or more of the entities identified in its approved restoration plan with a description of any changes to their roles and specific tasks prior to the effective date of the plan. OR Transmission Operator failed to provide at least half of the entities identified in its

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
				approved restoration plan with a description of any changes to their roles and specific tasks prior to the effective date.
R3.	The Transmission Operator submitted the reviewed restoration plan within 30 calendar days after the mutually-agreed, predetermined schedule.	The Transmission Operator submitted the reviewed restoration plan more than 30 and less than or equal to 60 calendar days after the mutually-agreed, predetermined schedule.	The Transmission Operator submitted the reviewed restoration plan more than 60 and less than or equal to 90 calendar days after the mutually-agreed, predetermined schedule.	The Transmission Operator submitted the reviewed restoration plan more than 90 calendar days after the mutually-agreed, predetermined schedule.
R4.	The Transmission Operator failed to submit its revised restoration plan to its Reliability Coordinator within 90 calendar days of an unplanned permanent System BES modification.	The Transmission Operator submitted its revised restoration plan to its Reliability Coordinator between 91 calendar days and 120 calendar days of an unplanned permanent System BES modification.	The Transmission Operator submitted its revised restoration plan to its Reliability Coordinator between 121 calendar days and 150 calendar days of an unplanned permanent System BES modification.	The Transmission Operator has failed to submit its revised restoration plan to its Reliability Coordinator within 150 calendar days of an unplanned permanent System BES modification. OR The Transmission Operator failed to submit its revised restoration plan to its Reliability Coordinator prior

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
				to a planned permanent BES modification.
R5.	N/A	N/A	N/A	The Transmission Operator did not make the latest Reliability Coordinator approved restoration plan available in its primary and backup control rooms prior to its effective date.
R6.	The Transmission Operator performed the verification within the required timeframe but did not comply with one of the requirement parts.	The Transmission Operator performed the verification within the required timeframe but did not comply with two of the requirement parts.	The Transmission Operator performed the verification but did not complete it within the required time frame.	The Transmission Operator did not perform the verification or it took more than six calendar years to complete the verification. OR The Transmission Operator performed the verification within the required timeframe but did not comply with any of the requirement parts.
R7.	N/A	N/A	N/A	The Transmission Operator's Blackstart Resource testing requirements do not address

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
				one or more of the requirement parts of Requirement R7.
R8.	The Transmission Operator's training does not address one of the requirement parts of Requirement R8.	The Transmission Operator's training does not address two of the requirement parts of Requirement R8.	The Transmission Operator's training does not address three or more of the requirement parts of Requirement R8.	The Transmission Operator has not included System restoration training in its operations training program.
R9.	The Transmission Operator, applicable Transmission Owner, or applicable Distribution Provider failed to train 5% or less of the personnel required by Requirement R9 within a two-calendar-year period.	The Transmission Operator, applicable Transmission Owner, or applicable Distribution Provider failed to train more than 5% and up to 10% of the personnel required by Requirement R9 within a two-calendar-year period.	The Transmission Operator, applicable Transmission Owner, or applicable Distribution Provider failed to train more than 10% and up to 15% of the personnel required by Requirement R9 within a two-calendar-year period.	The Transmission Operator, applicable Transmission Owner, or applicable Distribution Provider failed to train more than 15% of the personnel required by Requirement R9 within a two-calendar-year period.
R10.	N/A	N/A	N/A	The Transmission Operator has failed to comply with a request for its participation from its Reliability Coordinator.
R11.	N/A	The Transmission Operator and Generator Operator	N/A	The Transmission Operator and Generator Operator

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
		with a Blackstart Resource do not reference Blackstart Resource Testing requirements in their written Blackstart Resource Agreements or mutually-agreed upon procedures or protocols.		with a Blackstart resource do not have a written Blackstart Resource Agreement or mutually-agreed upon procedure or protocol.
R12.	N/A	N/A	N/A	The Generator Operator does not have documented starting and bus energizing procedures for each Blackstart Resource.
R13.	The Generator Operator with a Blackstart Resource did not notify the Transmission Operator of a known change in Blackstart Resource capability affecting the ability to meet the Transmission Operator's restoration plan within 24 hours but did make the notification within 48 hours.	The Generator Operator with a Blackstart Resource did not notify the Transmission Operator of a known change in Blackstart Resource capability affecting the ability to meet the Transmission Operator's restoration plan within 48 hours but did make the notification within 72 hours.	The Generator Operator with a Blackstart Resource did not notify the Transmission Operator of a known change in Blackstart Resource capability affecting the ability to meet the Transmission Operator's restoration plan within 72 hours but did make the notification within 96 hours.	The Generator Operator with a Blackstart Resource did not notify the Transmission Operator of a known change in Blackstart Resource capability affecting the ability to meet the Transmission Operator's restoration plan for more than 96 hours.

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
R14.	The Generator Operator with a Blackstart Resource performed tests and maintained records but the records did not include all of the items in Requirement R14, Part 14.1. OR The Generator Operator did not supply the Blackstart Resource testing records as requested for 31 to 60 calendar days after the request.	The Generator Operator with a Blackstart Resource performed tests and maintained records but did not supply the Blackstart Resource testing records as requested for 61 to 90 calendar days after the request.	The Generator Operator with a Blackstart Resource performed tests but either did not maintain records or did not supply the Blackstart Resource testing records as requested within 91 or more calendar days after the request.	The Generator Operator with a Blackstart Resource did not perform Blackstart Resource tests.
R15.	The Generator Operator with a Blackstart Resource did not train less than or equal to 10% of the personnel required by Requirement R15 within a two-calendar-year period.	The Generator Operator with a Blackstart Resource did not train more than 10% and less than or equal to 25% of the personnel required by Requirement R15 within a two-calendar-year period.	The Generator Operator with a Blackstart Resource did not train more than 25% and less than or equal to 50% of the personnel required by Requirement R15 within a two-calendar-year period.	The Generator Operator with a Blackstart Resource did not train more than 50% of the personnel required by Requirement R15 within a two-calendar-year period.
R16.	N/A	N/A	N/A	The Generator Operator failed to participate in its Reliability Coordinator's

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
				restoration drills, exercises, or simulations as requested by its Reliability Coordinator.

D. Regional Variances

None.

E. Associated Documents

[Link](#) to the Implementation Plan and other important associated documents.

Version History

Version	Date	Action	Change Tracking
0	April 1, 2005	Effective Date	New
0	August 8, 2005	Removed “Proposed” from Effective Date	Errata
1	May 2, 2007	Approved by the Board of Trustees	Revised
2		Revisions pursuant to Project 2006-03	Updated testing requirements Incorporated Attachment 1 into the requirements. Updated Measures and Compliance to match new requirements
2	August 5, 2009	Adopted by Board of Trustees	Revised
2	March 17, 2011	Order issued by FERC approving EOP-005-2 (approval effective 5/23/11)	
2	February 7, 2013	R3.1 and associated elements approved by NERC Board of Trustees for retirement as part of the Paragraph 81 project (Project 2013-02) pending applicable regulatory approval	
2	July 1, 2013	Updated VRFs and VSLs based on June 24, 2013 approval	
2	November 21, 2013	R3.1 and associated elements approved by FERC for retirement as part of the Paragraph 81 project (Project 2013-02)	
3	February 9, 2017	Adopted by the NERC Board of Trustees	Revised

EOP-005-3 – System Restoration from Blackstart Resources

3	January 18, 2018	FERC order issued approving EOP-005-3. Docket No. RM17-12-000.	
---	---------------------	--	--

Rationale

Rationale for Requirement R4: As previously written, Requirement R4 addressed (in one sentence) two restoration plan update items that a Transmission Operator must perform: (1) the restoration plan must be updated within 90 calendar days after identifying any unplanned permanent System modifications and (2) the restoration plan must be updated prior to implementing a planned BES modification. The phrase: “... that would change the implementation of its restoration plan” appeared to apply to both types of changes. There was no time frame specified for updating the restoration plan for a planned BES modification; although one could infer that “90 calendar days” is intended to be the same time frame for both unplanned and planned modifications. Furthermore, the distinction between “System modifications” for unplanned changes and “BES modifications” for planned changes has been seen as confusing to some Responsible Entities.

The references to permanent unplanned and planned BES modifications that will change the ability to implement the RC-approved restoration plan are intended to require a Responsible Entity to submit a revised restoration plan to the RC when the modification would substantively change the TOP’s ability to implement the restoration plan or impact the RC’s ability to monitor and direct restoration efforts. The intent is not to require a TOP to submit changes that do not substantively change the restoration plan or the RCs ability to monitor and direct the restoration efforts. Examples of instances that do not require update and submission of a restoration plan include element number changes, device changes, or administrative changes that have no significance to the implementation of the plan.

In addition, the timeframes referenced in Requirement R4, Part 4.2 for a permanent planned BES modification directs the Responsible Entity to EOP-006-2, Requirement R5.1 and EOP-006-3, Requirement R5, Part 5.1, which states that the RC shall approve or disapprove the TOPs submitted restoration plan within 30 days of receipt. This allows the Responsible Entity to coordinate submission with the RC based on the RCs specific requirements.

Rationale for Requirement R6: Dynamic simulations should simulate frequency and voltage response. It is the intent of the EOP SDT that the simulation provides for the feedback of the System performance as generation and Load are added.

Rationale for Requirement R8: The addition of Requirement 8, Part 8.5 allows operating personnel to gain experience on all stages of restoration, including coordination needed transferring Demand and resource balance operations, back to the Balancing Authority in accordance with Requirement R1, Part 1.9.

Rationale for Requirement R9: The intent of “unique tasks” are those tasks that are defined by the Transmission Operator, the Transmission Owner, and the Distribution Provider.

*** FOR INFORMATIONAL PURPOSES ONLY ***

Effective Date of Standard: EOP-005-3 — System Restoration from Blackstart Resources

United States

Standard	Requirement	Effective Date of Standard	Phased In Implementation Date (if applicable)	Inactive Date
EOP-005-3	All	04/01/2019		

Reliability Standard EOP-006-3

A. Introduction

1. **Title:** System Restoration Coordination
2. **Number:** EOP-006-3
3. **Purpose:** Ensure plans are established and personnel are prepared to enable effective coordination of the System restoration process to ensure reliability is maintained during restoration and priority is placed on restoring the Interconnection.
4. **Applicability:**
 - 4.1. **Functional Entities:**
 - 4.1.1. Reliability Coordinators
5. **Proposed Effective Date:** See the Implementation Plan for EOP-006-3.
6. **Standard-Only Definition:** None

B. Requirements and Measures

- R1.** Each Reliability Coordinator shall develop and implement a Reliability Coordinator Area restoration plan. The scope of the Reliability Coordinator's restoration plan starts when Blackstart Resources are utilized to re-energize a shutdown area of the Bulk Electric System (BES), or separation has occurred between neighboring Reliability Coordinators, or an energized island has been formed on the BES within the Reliability Coordinator Area. The scope of the Reliability Coordinator's restoration plan ends when all of its Transmission Operators are interconnected and its Reliability Coordinator Area is connected to all of its neighboring Reliability Coordinator Areas. The restoration plan shall include: *[Violation Risk Factor = High] [Time Horizon = Operations Planning, Real-time Operations]*
- 1.1. A description of the high-level strategy to be employed during restoration events for restoring the Interconnection, including minimum criteria for meeting the objectives of the Reliability Coordinator's restoration plan.
 - 1.2. Criteria and conditions for re-establishing interconnections with other Transmission Operators within its Reliability Coordinator Area, with Transmission Operators in other Reliability Coordinator Areas, and with other Reliability Coordinators.
 - 1.3. Reporting requirements for the entities within the Reliability Coordinator Area during a restoration event.
 - 1.4. Criteria for sharing information regarding restoration with neighboring Reliability Coordinators and with Transmission Operators and Balancing Authorities within its Reliability Coordinator Area.
 - 1.5. Identification of the Reliability Coordinator as the primary contact for disseminating information regarding restoration to neighboring Reliability

Coordinators, and to Transmission Operators, and Balancing Authorities within its Reliability Coordinator Area.

- 1.6.** Criteria for transferring operations and authority back to the Balancing Authority.
- M1.** Each Reliability Coordinator shall have available a dated copy of its restoration plan and will have evidence, such as operator logs or other operating documentation, voice recordings, or other communication documentation to show that its restoration plan was implemented in accordance with Requirement R1.
- R2.** The Reliability Coordinator shall distribute its most recent Reliability Coordinator Area restoration plan to each of its Transmission Operators and neighboring Reliability Coordinators within 30 calendar days of creation or revision. *[Violation Risk Factor = Lower] [Time Horizon = Operations Planning]*
- M2.** Each Reliability Coordinator shall provide evidence such as electronic receipts, posting to a secure website with notification to affected entities, or registered mail receipts, that its most recent restoration plan has been distributed in accordance with Requirement R2.
- R3.** Each Reliability Coordinator shall review its restoration plan within 13 calendar months of the last review. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- M3.** Each Reliability Coordinator shall provide evidence such as a review signature sheet, or revision histories, that it has reviewed its restoration plan within 13 calendar months of the last review in accordance with Requirement R3.
- R4.** Each Reliability Coordinator shall review its neighboring Reliability Coordinator's restoration plans and provide written notification of any conflicts discovered during that review within 60 calendar days of receipt. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
 - 4.1.** If a Reliability Coordinator finds conflicts between its restoration plans and any of its neighbors, the conflicts shall be resolved within 30 calendar days of receipt of written notification.
- M4.** Each Reliability Coordinator shall provide evidence such as dated review signature sheets or electronic receipt that it has reviewed its neighboring Reliability Coordinator's restoration plans and resolved any conflicts within the timing requirements of Requirement R4 and Requirement R4, Part 4.1.
- R5.** Each Reliability Coordinator shall review the restoration plans required by EOP-005 of the Transmission Operators within its Reliability Coordinator Area. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
 - 5.1.** The Reliability Coordinator shall determine whether the Transmission Operator's restoration plan is coordinated and compatible with the Reliability Coordinator's restoration plan and other Transmission Operators' restoration plans within its

Reliability Coordinator Area. The Reliability Coordinator shall provide notification to the Transmission Operator of approval or disapproval, with stated reasons, of the Transmission Operator's submitted restoration plan within 30 calendar days following the receipt of the restoration plan from the Transmission Operator.

- M5.** Each Reliability Coordinator shall provide evidence such as a dated review signature sheet or electronic receipt that it has reviewed, approved or disapproved, and notified its Transmission Operators within 30 calendar days following the receipt of the restoration plan from the Transmission Operator in accordance with Requirement R5.
- R6.** Each Reliability Coordinator shall have a copy of its latest restoration plan and copies of the latest approved restoration plan of each Transmission Operator in its Reliability Coordinator Area within its primary and backup control rooms so that it is available to all of its System Operators prior to the effective date. *[Violation Risk Factor = Lower]* *[Time Horizon = Operations Planning]*
- M6.** Each Reliability Coordinator shall have documentation such as electronic receipts that it has made the latest copy of its restoration plan and copies of the latest approved restoration plan of each Transmission Operator in its Reliability Coordinator Area available in its primary and backup control rooms and to each of its System Operators prior to the effective date in accordance with Requirement R6.
- R7.** Each Reliability Coordinator shall include within its operations training program, annual System restoration training for its System Operators. This training program shall address the following: *[Violation Risk Factor = Medium]* *[Time Horizon = Operations Planning]*
 - 7.1.** The coordination role of the Reliability Coordinator; and
 - 7.2.** Re-establishing the Interconnection.
- M7.** Each Reliability Coordinator shall have an electronic copy or hard copy of its training records available showing that it has provided training in accordance with Requirement R7.
- R8.** Each Reliability Coordinator shall conduct two System restoration drills, exercises, or simulations per calendar year, which shall include the Transmission Operators and Generator Operators as dictated by the particular scope of the drill, exercise, or simulation that is being conducted. *[Violation Risk Factor = Medium]* *[Time Horizon = Operations Planning]*
 - 8.1.** Each Reliability Coordinator shall request each Transmission Operator identified in its restoration plan and each Generator Operator identified in the Transmission Operators' restoration plans to participate in a drill, exercise, or simulation at least once every two calendar years.
- M8.** Each Reliability Coordinator shall have evidence, such as dated electronic documents, that it conducted two System restoration drills, exercises, or simulations per calendar year in accordance with Requirement R8. And each Reliability Coordinator shall have

evidence that the Reliability Coordinator requested each applicable Transmission Operator and Generator Operator to participate per Requirement R8 and Requirement R8, Part 8.1.

C. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority:

“Compliance Enforcement Authority” means NERC or the Regional Entity, or any entity as otherwise designated by an Applicable Governmental Authority, in their respective roles of monitoring and/or enforcing compliance with mandatory and enforceable Reliability Standards in their respective jurisdictions.

1.2. Evidence Retention:

The following evidence retention period(s) identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full-time period since the last audit.

The applicable entity shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation.

- The current restoration plan and any restoration plans in effect since the last compliance audit for Requirement R1, Measure M1.
- Distribution of its most recent restoration plan and any restoration plans in effect for the current calendar year and three prior calendar years for Requirement R2, Measure M2.
- It's reviewed restoration plan for the current review period and the last three prior review periods for Requirement R3, Measure M3.
- Reviewed copies of neighboring Reliability Coordinator restoration plans for the current calendar year and the three prior calendar years for Requirement R4, Measure M4.
- The reviewed restoration plans for the current calendar year and the last three prior calendar years for Requirement R5, Measure M5.
- The current, approved restoration plan and any restoration plans in effect for the last three calendar years was made available in its control rooms for Requirement R6, Measure M6.
- Actual training program materials or descriptions for three calendar years for Requirements R7, Measure M7.

- Records of all Reliability Coordinator restoration drills, exercises, or simulations since its last compliance audit, as well as one previous compliance audit period for Requirement R8, Measure M8.

If a Reliability Coordinator is found non-compliant, it shall keep information related to the non-compliance until mitigation is complete and approved or for the time period specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Enforcement Program

As defined in the NERC Rules of Procedure, “Compliance Monitoring and Enforcement Program” refers to the identification of the processes that will be used to evaluate data or information for the purpose of assessing performance or outcomes with the associated Reliability Standard.

Violation Severity Levels

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1.	The Reliability Coordinator failed to include one requirement part of Requirement R1 within its restoration plan.	The Reliability Coordinator failed to include two requirement parts of Requirement R1 within its restoration plan.	The Reliability Coordinator failed to include three of the requirements parts of Requirement R1 within its restoration plan.	The Reliability Coordinator failed to include four or more of the requirement parts within its restoration plan. OR The Reliability Coordinator had a restoration plan, but failed to implement it.
R2.	The Reliability Coordinator distributed the most recent Reliability Coordinator Area restoration plan to the entities identified in Requirement R2 but was more than 30 calendar days late but less than 60 calendar days late.	The Reliability Coordinator distributed the most recent Reliability Coordinator Area restoration plan to the entities identified in Requirement R2 but was 60 calendar days or more late, but less than 90 calendar days late.	The Reliability Coordinator distributed the most recent Reliability Coordinator Area restoration plan to the entities identified in Requirement R2 but was 90 or more calendar days late but less than 120 calendar days late.	The Reliability Coordinator distributed the most recent Reliability Coordinator Area restoration plan to entities identified in Requirement R2 but was 120 calendar days or more late.
R3.	N/A	N/A	N/A	The Reliability Coordinator did not review its restoration plan within 13 calendar months of the last review.

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
R4.	The Reliability Coordinator reviewed the submitted restoration plans from its neighboring Reliability Coordinators within 60 calendar days of receipt, and resolved conflicts between 31 and 60 calendar days following written notification.	The Reliability Coordinator reviewed the submitted restoration plans from its neighboring Reliability Coordinators within 60 calendar days of receipt and resolved conflicts between 61 and 90 calendar days following written notification.	The Reliability Coordinator reviewed the submitted restoration plans from its neighboring Reliability Coordinators within 60 calendar days of receipt and resolved conflicts 91 or more calendar days following written notification.	The Reliability Coordinator did not review the submitted restoration plans from its neighboring Reliability Coordinators within 60 calendar days of receipt.
R5.	The Reliability Coordinator did not review and approve/disapprove the submitted restoration plans, with stated reasons for disapproval, from its Transmission Operators and neighboring Reliability Coordinators within 30 calendar days of receipt but did review and approve/disapprove the plans within 45 calendar days of receipt. OR	The Reliability Coordinator did not review and approve/disapprove the submitted restoration plans, with stated reasons for disapproval, from its Transmission Operators and neighboring Reliability Coordinators within 30 calendar days of receipt but did review and approve/disapprove the plans within 60 calendar days of receipt. OR	The Reliability Coordinator did not review and approve/disapprove the submitted restoration plans, with stated reasons for disapproval, from its Transmission Operators and neighboring Reliability Coordinators within 30 calendar days of receipt but did review and approve/disapprove the plans within 90 calendar days of receipt. OR	The Reliability Coordinator did not review and approve/disapprove the submitted restoration plans, with stated reasons for disapproval, from its Transmission Operators and neighboring Reliability Coordinators for more than 90 calendar days of receipt. OR The Reliability Coordinator failed to notify the Transmission Operator of its

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
	The Reliability Coordinator failed to notify the Transmission Operator of its approval or disapproval with stated reasons for disapproval within 30 calendar days of receipt but did notify the Transmission Operator of its approval or disapproval with reasons within 45 calendar days of receipt.	The Reliability Coordinator failed to notify the Transmission Operator of its approval or disapproval with stated reasons for disapproval within 30 calendar days of receipt, but did notify the Transmission Operator of its approval or disapproval with reasons within 60 calendar days of receipt	The Reliability Coordinator failed to notify the Transmission Operator of its approval or disapproval with stated reasons for disapproval within 30 calendar days of receipt but did notify the Transmission Operator of its approval or disapproval with reasons within 90 calendar days of receipt.	approval or disapproval with stated reasons for disapproval for more than 90 calendar days of receipt.
R6.	N/A	N/A	The Reliability Coordinator did not have a copy of the latest approved restoration plan of all Transmission Operators in its Reliability Coordinator Area within its primary and backup control rooms prior to the effective date.	The Reliability Coordinator did not have a copy of its latest restoration plan within its primary and backup control rooms prior to the effective date.
R7.	N/A	N/A	The Reliability Coordinator included the annual System restoration training within its operations training program,	The Reliability Coordinator did not include the annual System restoration training

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
			but did not address both of the requirement parts.	within its operations training program.
R8.	N/A	The Reliability Coordinator only held one restoration drill, exercise, or simulation during the calendar year. OR The Reliability Coordinator did not request each applicable Transmission Operator or Generator Operator identified in its restoration plan to participate in a drill, exercise, or simulation at least once every two calendar years.	N/A	The Reliability Coordinator did not hold a restoration drill, exercise, or simulation during the calendar year.

D. Regional Variances

None.

E. Associated Documents

[Link](#) to the Implementation Plan and other important associated documents.

Version History

Version	Date	Action	Change Tracking
0	April 1, 2005	Effective Date	New
0	August 8, 2005	Removed “Proposed” from Effective Date	Errata
1	Nov. 1, 2006	Adopted by Board of Trustees	Revised
2		Revisions pursuant to Project 2006-03	Updated Measures and Compliance to match new Requirements
2	August 5, 2009	Adopted by Board of Trustees	Revised
2	March 17, 2011	Order issued by FERC approving EOP-006-2 (approval effective 5/23/11)	
2	July 1, 2013	Updated VRFs and VSLs based on June 24, 2013 approval.	
3	February 9, 2017	Adopted by the NERC Board of Trustees	Revised
3	January 18, 2018	FERC order issued approving EOP-006-3. Docket No. RM17-12-000.	

*** FOR INFORMATIONAL PURPOSES ONLY ***

Effective Date of Standard: EOP-006-3 — System Restoration Coordination

United States

Standard	Requirement	Effective Date of Standard	Phased In Implementation Date (if applicable)	Inactive Date
EOP-006-3	All	04/01/2019		

Reliability Standard EOP-008-2

A. Introduction

1. **Title:** Loss of Control Center Functionality
2. **Number:** EOP-008-2
3. **Purpose:** Ensure continued reliable operations of the Bulk Electric System (BES) in the event that a control center becomes inoperable.
4. **Applicability:**
 - 4.1. **Functional Entities:**
 - 4.1.1. Reliability Coordinator
 - 4.1.2. Transmission Operator
 - 4.1.3. Balancing Authority
5. **Effective Date:** See the Implementation Plan for EOP-008-2.
6. **Standard-Only Definition:** None

B. Requirements and Measures

- R1. Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall have a current Operating Plan describing the manner in which it continues to meet its functional obligations with regard to the reliable operations of the BES in the event that its primary control center functionality is lost. This Operating Plan for backup functionality shall include: *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
 - 1.1. The location and method of implementation for providing backup functionality.
 - 1.2. A summary description of the elements required to support the backup functionality. These elements shall include:
 - 1.2.1. Tools and applications to ensure that System Operators have situational awareness of the BES.
 - 1.2.2. Data exchange capabilities.
 - 1.2.3. Interpersonal Communications.
 - 1.2.4. Power source(s).
 - 1.2.5. Physical and cyber security.
 - 1.3. An Operating Process for keeping the backup functionality consistent with the primary control center.
 - 1.4. Operating Procedures, including decision authority, for use in determining when to implement the Operating Plan for backup functionality.
 - 1.5. A transition period between the loss of primary control center functionality and the time to fully implement the backup functionality that is less than or equal to two hours.

- 1.6.** An Operating Process describing the actions to be taken during the transition period between the loss of primary control center functionality and the time to fully implement backup functionality elements identified in Requirement R1, Part 1.2. The Operating Process shall include:
- 1.6.1.** A list of all entities to notify when there is a change in operating locations.
 - 1.6.2.** Actions to manage the risk to the BES during the transition from primary to backup functionality, as well as during outages of the primary or backup functionality.
 - 1.6.3.** Identification of the roles for personnel involved during the initiation and implementation of the Operating Plan for backup functionality.
- M1.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall have a dated, current, and in effect Operating Plan for backup functionality in accordance with Requirement R1, in electronic or hardcopy format.
- R2.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall have a copy of its current Operating Plan for backup functionality available at its primary control center and at the location providing backup functionality. *[Violation Risk Factor = Lower] [Time Horizon = Operations Planning]*
- M2.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall have a dated, current, and in effect copy of its Operating Plan for backup functionality in accordance with Requirement R2, in electronic or hardcopy format, available at its primary control center and at the location providing backup functionality.
- R3.** Each Reliability Coordinator shall have a backup control center facility (provided through its own dedicated backup facility or at another entity's control center staffed with certified Reliability Coordinator operators when control has been transferred to the backup facility) that provides the functionality required for maintaining compliance with all Reliability Standards applicable to the primary control center functionality. To avoid requiring a tertiary facility, a backup facility is not required during: *[Violation Risk Factor = High] [Time Horizon = Operations Planning]*
 - Planned outages of the primary or backup facilities of two weeks or less
 - Unplanned outages of the primary or backup facilities
- M3.** Each Reliability Coordinator shall provide dated evidence that it has a backup control center facility (provided through its own dedicated backup facility or at another entity's control center staffed with certified Reliability Coordinator operators when control has been transferred to the backup facility) that provides the functionality required for maintaining compliance with all Reliability Standards that are applicable to the primary control center functionality in accordance with Requirement R3.
- R4.** Each Balancing Authority and Transmission Operator shall have backup functionality (provided either through a facility or contracted services staffed by applicable certified operators when control has been transferred to the backup functionality)

location) that includes monitoring, control, logging, and alarming sufficient for maintaining compliance with all Reliability Standards that are applicable to a Balancing Authority's and Transmission Operator's primary control center functionality. To avoid requiring tertiary functionality, backup functionality is not required during: *[Violation Risk Factor = High] [Time Horizon = Operations Planning]*

- Planned outages of the primary or backup functionality of two weeks or less
- Unplanned outages of the primary or backup functionality

- M4.** Each Balancing Authority and Transmission Operator shall provide dated evidence that its backup functionality (provided either through a facility or contracted services staffed by applicable certified operators when control has been transferred to the backup functionality location) includes monitoring, control, logging, and alarming sufficient for maintaining compliance with all Reliability Standards that are applicable to a Balancing Authority's or Transmission Operator's primary control center functionality in accordance with Requirement R4.
- R5.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator, shall annually review and approve its Operating Plan for backup functionality. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- 5.1. An update and approval of the Operating Plan for backup functionality shall take place within sixty calendar days of any changes to any part of the Operating Plan described in Requirement R1.
- M5.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall have evidence that its dated, current, and in effect Operating Plan for backup functionality, in electronic or hardcopy format, has been reviewed and approved annually and that it has been updated within sixty calendar days of any changes to any part of the Operating Plan described in Requirement R1 in accordance with Requirement R5.
- R6.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall have primary and backup functionality that do not depend on each other for the control center functionality required to maintain compliance with Reliability Standards. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- M6.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall have dated evidence that its primary and backup functionality do not depend on each other for the control center functionality required to maintain compliance with Reliability Standards in accordance with Requirement R6.
- R7.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall conduct and document results of an annual test of its Operating Plan that demonstrates: *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- 7.1. The transition time between the simulated loss of primary control center functionality and the time to fully implement the backup functionality.
- 7.2. The backup functionality for a minimum of two continuous hours.

- M7.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall provide evidence such as dated records, that it has completed and documented its annual test of its Operating Plan for backup functionality, in accordance with Requirement R7.
- R8.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator that has experienced a loss of its primary or backup functionality and that anticipates that the loss of primary or backup functionality will last for more than six calendar months shall provide a plan to its Regional Entity within six calendar months of the date when the functionality is lost, showing how it will re-establish primary or backup functionality. *[Violation Risk Factor = Medium] [Time Horizon = Operations Planning]*
- M8.** Each Reliability Coordinator, Balancing Authority, and Transmission Operator that has experienced a loss of their primary or backup functionality and that anticipates that the loss of primary or backup functionality will last for more than six calendar months shall provide evidence that a plan has been submitted to its Regional Entity within six calendar months of the date when the functionality is lost showing how it will re-establish primary or backup functionality in accordance with Requirement R8.

C. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority:

“Compliance Enforcement Authority” means NERC or the Regional Entity, or any entity as otherwise designated by an Applicable Governmental Authority, in their respective roles of monitoring and/or enforcing compliance with mandatory and enforceable Reliability Standards in their respective jurisdictions.

1.2. Evidence Retention:

The following evidence retention period(s) identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full-time period since the last audit.

The applicable entity shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation.

- Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall retain its dated, current, in effect Operating Plan for backup functionality plus all issuances of the Operating Plan for backup functionality since its last compliance audit in accordance with Measurement M1.
- Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall retain a dated, current, in effect copy of its Operating Plan for backup functionality, with evidence of its last issue, available at its primary control center and at the location providing backup functionality, for the current year, in accordance with Measurement M2.
- Each Reliability Coordinator shall retain dated evidence for the time period since its last compliance audit, that it has demonstrated that it has a backup control center facility (provided through its own dedicated backup facility or at another entity’s control center staffed with certified Reliability Coordinator operators when control has been transferred to the backup facility) in accordance with Requirement R3 that provides the functionality required for maintaining compliance with all Reliability Standards that are applicable to the primary control center functionality in accordance with Measurement M3.
- Each Balancing Authority and Transmission Operator shall retain dated evidence for the time period since its last compliance audit, that it has demonstrated that its backup functionality (provided either through a facility or contracted services staffed by applicable certified operators

when control has been transferred to the backup functionality location) in accordance with Requirement R4 includes monitoring, control, logging, and alarming sufficient for maintaining compliance with all Reliability Standards that are applicable to a Balancing Authority's and Transmission Operator's primary control center functionality in accordance with Measurement M4.

- Each Reliability Coordinator, Balancing Authority, and Transmission Operator, shall retain evidence for the time period since its last compliance audit, that its dated, current, in effect Operating Plan for backup functionality, has been reviewed and approved annually and that it has been updated within sixty calendar days of any changes to any part of the Operating Plan described in Requirement R1 in accordance with Measurement M5.
- Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall retain dated evidence for the current year and for any Operating Plan for backup functionality in effect since its last compliance audit, that its primary and backup functionality do not depend on each other for the control center functionality required to maintain compliance with Reliability Standards in accordance with Measurement M6.
- Each Reliability Coordinator, Balancing Authority, and Transmission Operator shall retain evidence for the current calendar year and the previous calendar years, such as dated records, that it has tested its Operating Plan for backup functionality, in accordance with Measurement M7.
- Each Reliability Coordinator, Balancing Authority, and Transmission Operator that has experienced a loss of their primary or backup functionality and that anticipates that the loss of primary or backup functionality would last for more than six calendar months shall retain evidence for the current in effect document and any such documents in effect since its last compliance audit that a plan has been submitted to its Regional Entity within six calendar months of the date when the functionality is lost showing how it will re-establish primary or backup functionality in accordance with Measurement M8.

1.3. Compliance Monitoring and Enforcement Program

As defined in the NERC Rules of Procedure, “Compliance Monitoring and Enforcement Program” refers to the identification of the processes that will be used to evaluate data or information for the purpose of assessing performance or outcomes with the associated Reliability Standard.

Violation Severity Levels

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1.	The responsible entity had a current Operating Plan for backup functionality, but the plan was missing one of the requirement's six parts (Requirement R1, Parts 1.1 through 1.6).	The responsible entity had a current Operating Plan for backup functionality, but the plan was missing two of the requirement's six parts (Requirement R1, Parts 1.1 through 1.6).	The responsible entity had a current Operating Plan for backup functionality, but the plan was missing three of the requirement's six parts (Requirement R1, Parts 1.1 through 1.6).	The responsible entity had a current Operating Plan for backup functionality, but the plan was missing four or more of the requirement's six parts (Requirement R1, Parts 1.1 through 1.6) OR The responsible entity did not have a current Operating Plan for backup functionality.
R2.	N/A	The responsible entity did not have a copy of its current Operating Plan for backup functionality available in at least one of its control locations.	N/A	The responsible entity did not have a copy of its current Operating Plan for backup functionality at any of its locations.
R3.	N/A	N/A	N/A	The Reliability Coordinator does not have a backup control center facility (provided through its own dedicated backup facility or at another entity's control)

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
				center staffed with certified Reliability Coordinator operators when control has been transferred to the backup facility) that provides the functionality required for maintaining compliance with all Reliability Standards that are applicable to the primary control center functionality.
R4.	N/A	N/A	N/A	The responsible entity does not have backup functionality (provided either through a facility or contracted services staffed by applicable certified operators when control has been transferred to the backup functionality location) that includes monitoring, control, logging, and alarming sufficient for maintaining compliance with all Reliability Standards that are applicable to a Balancing Authority's and Transmission Operator's

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
				primary control center functionality.
R5.	The responsible entity did not update and approve its Operating Plan for backup functionality for more than 60 calendar days and less than or equal to 70 calendar days after a change to any part of the Operating Plan described in Requirement R1.	The responsible entity did not update and approve its Operating Plan for backup functionality for more than 70 calendar days and less than or equal to 80 calendar days after a change to any part of the Operating Plan described in Requirement R1.	The responsible entity did not update and approve its Operating Plan for backup functionality for more than 80 calendar days and less than or equal to 90 calendar days after a change to any part of the Operating Plan described in Requirement R1.	The responsible entity did not have evidence that its Operating Plan for backup functionality was annually reviewed and approved. OR, The responsible entity did not update and approve its Operating Plan for backup functionality for more than 90 calendar days after a change to any part of the Operating Plan described in Requirement R1.
R6.	N/A	N/A	N/A	The responsible entity has primary and backup functionality that do depend on each other for the control center functionality required to maintain compliance with Reliability Standards.
R7.	The responsible entity conducted an annual test of	The responsible entity conducted an annual test of	The responsible entity conducted an annual test of	The responsible entity did not conduct an annual test

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
	<p>its Operating Plan for backup functionality, but it did not document the results.</p> <p>OR,</p> <p>The responsible entity conducted an annual test of its Operating Plan for backup functionality, but the test was for less than two continuous hours but more than or equal to 1.5 continuous hours.</p>	<p>its Operating Plan for backup functionality, but the test was for less than 1.5 continuous hours but more than or equal to 1 continuous hour.</p>	<p>its Operating Plan for backup functionality, but the test did not assess the transition time between the simulated loss of its primary control center and the time to fully implement the backup functionality</p> <p>OR,</p> <p>The responsible entity conducted an annual test of its Operating Plan for backup functionality, but the test was for less than 1 continuous hour but more than or equal to 0.5 continuous hours.</p>	<p>of its Operating Plan for backup functionality.</p> <p>OR,</p> <p>The responsible entity conducted an annual test of its Operating Plan for backup functionality, but the test was for less than 0.5 continuous hours.</p>
R8.	The responsible entity experienced a loss of its primary or backup functionality and anticipated that the loss of primary or backup functionality would last for more than six calendar months and provided a plan to its	The responsible entity experienced a loss of its primary or backup functionality and anticipated that the loss of primary or backup functionality would last for more than six calendar months provided a plan to its Regional Entity	The responsible entity experienced a loss of its primary or backup functionality and anticipated that the loss of primary or backup functionality would last for more than six calendar months provided a plan to its Regional Entity	The responsible entity experienced a loss of its primary or backup functionality and anticipated that the loss of primary or backup functionality would last for more than six calendar months, but did not submit a plan to its Regional

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
	Regional Entity showing how it will re-establish primary or backup functionality but the plan was submitted more than six calendar months but less than or equal to seven calendar months after the date when the functionality was lost.	showing how it will re-establish primary or backup functionality but the plan was submitted in more than seven calendar months but less than or equal to eight calendar months after the date when the functionality was lost.	showing how it will re-establish primary or backup functionality but the plan was submitted in more than eight calendar months but less than or equal to nine calendar months after the date when the functionality was lost.	Entity showing how it will re-establish primary or backup functionality for more than nine calendar months after the date when the functionality was lost.

D. Regional Variances

None.

E. Associated Documents

[Link](#) to the Implementation Plan and other important associated documents.

Version History

Version	Date	Action	Change Tracking
1	2009 - 2010	Project 2006-04: Revisions	Major re-write to accommodate changes noted in project file
1	August 5, 2010	Project 2006-04: Adopted by the Board	
1	April 21, 2011	Project 2006-04: FERC Order issued approving EOP-008-1 (approval effective June 27, 2011)	
1	July 1, 2013	Project 2006-04: Updated VRFs and VSLs based on June 24, 2013 approval	
2	July 9, 2017	Adopted by the NERC Board of Trustees	Revised
2	January 18, 2018	FERC order issued approving EOP-008-2. Docket No. RM17-12-000.	

Rationale

Rationale for Requirement R1: The phrase "data exchange capabilities" is replacing "data communications" in Requirement R1, Part 1.2.2 for the following reasons:

COM-001-1 (no longer enforceable) covered telecommunications, which could be viewed as covering both voice and data. COM-001-2.1 (currently enforceable) focuses on "Interpersonal Communication" and does not address data.

The topic of data exchange has historically been covered in the IRO / TOP Standards. Most recently the revisions to the standards that came out of Project 2014-03 Revisions to TOP and IRO Standards use the phrase "data exchange capabilities." The rationale included in the IRO-002-4 standard discusses the need to retain the topic of data exchange, as it is not addressed in the COM standards.

*** FOR INFORMATIONAL PURPOSES ONLY ***

Effective Date of Standard: EOP-008-2 — Loss of Control Center Functionality

United States

Standard	Requirement	Effective Date of Standard	Phased In Implementation Date (if applicable)	Inactive Date
EOP-008-2	All	04/01/2019		

Exhibit B: List of Currently-Effective NERC Reliability Standards

Exhibit B: List of Currently Effective NERC Reliability Standards in First Quarter 2018

Resource and Demand Balancing (BAL)

BAL-001-2	<u>Real Power Balancing Control Performance</u>
BAL-001-TRE-1	<u>Primary Frequency Response in the ERCOT Region</u>
BAL-002-2(i)	<u>Disturbance Control Standard – Contingency Reserve for Recovery from a Balancing Contingency Event</u>
BAL-002-WECC-2a	<u>Contingency Reserve</u>
BAL-003-1.1	<u>Frequency Response and Frequency Bias Setting</u>
BAL-004-WECC-02	<u>Automatic Time Error Correction (ATEC)</u>
BAL-005-0.2b	<u>Automatic Generation Control</u>
BAL-006-2	<u>Inadvertent Interchange</u>
BAL-502-RF-03	<u>Planning Resource Adequacy Analysis, Assessment and Documentation</u>

Communications (COM)

COM-001-3	<u>Communications</u>
COM-002-4	<u>Operating Personnel Communications Protocols</u>

Critical Infrastructure Protection (CIP)

CIP-002-5.1a	<u>Cyber Security — BES Cyber System Categorization</u>
CIP-003-6	<u>Cyber Security — Security Management Controls</u>
CIP-004-6	<u>Cyber Security — Personnel & Training</u>
CIP-005-5	<u>Cyber Security — Electronic Security Perimeter(s)</u>
CIP-006-6	<u>Cyber Security — Physical Security of BES Cyber Systems</u>
CIP-007-6	<u>Cyber Security — System Security Management</u>
CIP-008-5	<u>Cyber Security — Incident Reporting and Response Planning</u>
CIP-009-6	<u>Cyber Security — Recovery Plans for BES Cyber Systems</u>
CIP-010-2	<u>Cyber Security — Configuration Change Management and Vulnerability Assessments</u>
CIP-011-2	<u>Cyber Security — Information Protection</u>
CIP-014-2	<u>Physical Security</u>

Emergency Preparedness and Operations (EOP)

EOP-004-3	<u>Event Reporting</u>
-----------	--

EOP-005-2	System Restoration from Blackstart Resources
EOP-006-2	System Restoration Coordination
EOP-008-1	Loss of Control Center Functionality
EOP-010-1	Geomagnetic Disturbance Operations
EOP-011-1	Emergency Operations

Facilities Design, Connections, and Maintenance (FAC)

FAC-001-2	Facility Interconnection Requirements
FAC-002-2	Facility Interconnection Studies
FAC-003-4	Transmission Vegetation Management
FAC-008-3	Facility Ratings
FAC-010-3	System Operating Limits Methodology for the Planning Horizon
FAC-011-3	System Operating Limits Methodology for the Operations Horizon
FAC-013-2	Assessment of Transfer Capability for the Near-Term Transmission Planning Horizon
FAC-014-2	Establish and Communicate System Operating Limits
FAC-501-WECC-1	Transmission Maintenance

Interchange Scheduling and Coordination (INT)

INT-004-3.1	Dynamic Transfers
INT-006-4	Evaluation of Interchange Transactions
INT-009-2.1	Implementation of Interchange
INT-010-2.1	Interchange Initiation and Modification for Reliability

Interconnection Reliability Operations and Coordination (IRO)

IRO-001-4	Reliability Coordination – Responsibilities
IRO-002-5	Reliability Coordination – Monitoring and Analysis
IRO-006-5	Reliability Coordination — Transmission Loading Relief (TLR)
IRO-006-EAST-2	Transmission Loading Relief Procedure for the Eastern Interconnection
IRO-006-TRE-1	IROL and SOL Mitigation in the ERCOT Region
IRO-006-WECC-2	Qualified Transfer Path Unscheduled Flow (USF) Relief
IRO-008-2	Reliability Coordinator Operational Analyses and Real-time Assessments

IRO-009-2	Reliability Coordinator Actions to Operate Within IROLs
IRO-010-2	Reliability Coordinator Data Specification and Collection
IRO-014-3	Coordination Among Reliability Coordinators
IRO-017-1	Outage Coordination
IRO-018-1(i)	Reliability Coordinator Real-time Reliability Monitoring and Analysis Capabilities

Modeling, Data, and Analysis (MOD)

MOD-001-1a	Available Transmission System Capability
MOD-004-1	Capacity Benefit Margin
MOD-008-1	Transmission Reliability Margin Calculation Methodology
MOD-020-0	Providing Interruptible Demands and Direct Control Load Management Data to System Operators and Reliability Coordinators
MOD-025-2	Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability
MOD-026-1	Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions
MOD-027-1	Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions
MOD-028-2	Area Interchange Methodology
MOD-029-2a	Rated System Path Methodology
MOD-030-3	Flowgate Methodology
MOD-031-2	Demand and Energy Data
MOD-032-1	Data for Power System Modeling and Analysis
MOD-033-1	Steady-State and Dynamic System Model Validation

Nuclear (NUC)

NUC-001-3	Nuclear Plant Interface Coordination
-----------	--

Personnel Performance, Training, and Qualifications (PER)

PER-003-1	Operating Personnel Credentials
PER-004-2	Reliability Coordination — Staffing
PER-005-2	Operations Personnel Training

Protection and Control (PRC)

PRC-001-1.1(ii)	<u>System Protection Coordination</u>
PRC-002-2	<u>Disturbance Monitoring and Reporting Requirements</u>
PRC-004-5(i)	<u>Protection System Misoperation Identification and Correction</u>
PRC-004-WECC-2	<u>Protection System and Remedial Action Scheme Misoperation</u>
PRC-005-1.1b	<u>Transmission and Generation Protection System Maintenance and Testing</u>
PRC-005-6	<u>Protection System, Automatic Reclosing, and Sudden Pressure Relaying Maintenance</u>
PRC-006-3	<u>Automatic Underfrequency Load Shedding</u>
PRC-006-NPCC-1	<u>Automatic Underfrequency Load Shedding</u>
PRC-006-SERC-02	<u>Automatic Underfrequency Load Shedding Requirements</u>
PRC-008-0	<u>Implementation and Documentation of Underfrequency Load Shedding Equipment Maintenance Program</u>
PRC-010-2	<u>Undervoltage Load Shedding</u>
PRC-011-0	<u>Undervoltage Load Shedding System Maintenance and Testing</u>
PRC-015-1	<u>Remedial Action Scheme Data and Documentation</u>
PRC-016-1	<u>Remedial Action Scheme Misoperations</u>
PRC-017-1	<u>Remedial Action Scheme Maintenance and Testing</u>
PRC-018-1	<u>Disturbance Monitoring Equipment Installation and Data Reporting</u>
PRC-019-2	<u>Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection</u>
PRC-023-4	<u>Transmission Relay Loadability</u>
PRC-024-2	<u>Generator Frequency and Voltage Protective Relay Settings</u>
PRC-025-1	<u>Generator Relay Loadability</u>
PRC-026-1	<u>Relay Performance During Stable Power Swings</u>

Transmission Operations (TOP)

TOP-001-3	<u>Transmission Operations</u>
TOP-002-4	<u>Operations Planning</u>
TOP-003-3	<u>Operational Reliability Data</u>
TOP-010-1(i)	<u>Real-time Reliability Monitoring and Analysis Capabilities</u>

Transmission Planning (TPL)

- TPL-001-4 [Transmission System Planning Performance Requirements](#)
TPL-007-1 [Transmission System Planned Performance for Geomagnetic Disturbance Events](#)

Voltage and Reactive (VAR)

- VAR-001-4.2 [Voltage and Reactive Control](#)
VAR-002-4.1 [Generator Operation for Maintaining Network Voltage Schedules](#)
VAR-002-WECC-2 [Automatic Voltage Regulators \(AVR\)](#)
VAR-501-WECC-3.1 [Power System Stabilizer \(PSS\)](#)

Exhibit C: Updated *Glossary of Terms Used in NERC Reliability Standards*

Glossary of Terms Used in NERC Reliability Standards

Updated January 31, 2018

This Glossary lists each term that was defined for use in one or more of NERC's continent-wide or Regional Reliability Standards and adopted by the NERC Board of Trustees from February 8, 2005 through January 31, 2018.

This reference is divided into four sections, and each section is organized in alphabetical order.

Subject to Enforcement

Pending Enforcement

Retired Terms

Regional Definitions

The first three sections identify all terms that have been adopted by the NERC Board of Trustees for use in continent-wide standards; the Regional definitions section identifies all terms that have been adopted by the NERC Board of Trustees for use in regional standards.

Most of the terms identified in this glossary were adopted as part of the development of NERC's initial set of reliability standards, called the "Version 0" standards. Subsequent to the development of Version 0 standards, new definitions have been developed and approved following NERC's Reliability Standards Development Process, and added to this glossary following board adoption, with the "FERC effective" date added following a final Order approving the definition.

Any comments regarding this glossary should be reported to the following:

sarcomm@nerc.com with "Glossary Comment" in the subject line.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Actual Frequency (F_A)	Project 2010-14.2.1. Phase 2		2/11/2016		7/1/2016	The Interconnection frequency measured in Hertz (Hz).
Actual Net Interchange (NI_A)	Project 2010-14.2.1. Phase 2		2/11/2016		7/1/2016	The algebraic sum of actual megawatt transfers across all Tie Lines, including Pseudo-Ties, to and from all Adjacent Balancing Authority areas within the same Interconnection. Actual megawatt transfers on asynchronous DC tie lines that are directly connected to another Interconnection are excluded from Actual Net Interchange.
Adequacy	Version 0 Reliability Standards		2/8/2005	3/16/2007		The ability of the electric system to supply the aggregate electrical demand and energy requirements of the end-use customers at all times, taking into account scheduled and reasonably expected unscheduled outages of system elements.
Adjacent Balancing Authority	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	A Balancing Authority whose Balancing Authority Area is interconnected with another Balancing Authority Area either directly or via a multi-party agreement or transmission tariff.
Adverse Reliability Impact	Coordinate Operations		2/7/2006	3/16/2007		The impact of an event that results in frequency-related instability; unplanned tripping of load or generation; or uncontrolled separation or cascading outages that affects a widespread area of the Interconnection.
After the Fact	Project 2007-14	ATF	10/29/2008	12/17/2009		A time classification assigned to an RFI when the submittal time is greater than one hour after the start time of the RFI.
Agreement	Version 0 Reliability Standards		2/8/2005	3/16/2007		A contract or arrangement, either written or verbal and sometimes enforceable by law.
Alternative Interpersonal Communication	Project 2006-06		11/7/2012	4/16/2015	10/1/2015	Any Interpersonal Communication that is able to serve as a substitute for, and does not utilize the same infrastructure (medium) as, Interpersonal Communication used for day-to-day operation.
Altitude Correction Factor	Project 2007-07		2/7/2006	3/16/2007		A multiplier applied to specify distances, which adjusts the distances to account for the change in relative air density (RAD) due to altitude from the RAD used to determine the specified distance. Altitude correction factors apply to both minimum worker approach distances and to minimum vegetation clearance distances.
Ancillary Service	Version 0 Reliability Standards		2/8/2005	3/16/2007		Those services that are necessary to support the transmission of capacity and energy from resources to loads while maintaining reliable operation of the Transmission Service Provider's transmission system in accordance with good utility practice. (From FERC order 888-A.)
Anti-Aliasing Filter	Version 0 Reliability Standards		2/8/2005	3/16/2007		An analog filter installed at a metering point to remove the high frequency components of the signal over the AGC sample period.
Area Control Error	Version 0 Reliability Standards	ACE	12/19/2012	10/16/2013	4/1/2014	The instantaneous difference between a Balancing Authority's net actual and scheduled interchange, taking into account the effects of Frequency Bias, correction for meter error, and Automatic Time Error Correction (ATEC), if operating in the ATEC mode. ATEC is only applicable to Balancing Authorities in the Western Interconnection.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Area Interchange Methodology	Project 2006-07		8/22/2008	11/24/2009		The Area Interchange methodology is characterized by determination of incremental transfer capability via simulation, from which Total Transfer Capability (TTC) can be mathematically derived. Capacity Benefit Margin, Transmission Reliability Margin, and Existing Transmission Commitments are subtracted from the TTC, and Postbacks and counterflows are added, to derive Available Transfer Capability. Under the Area Interchange Methodology, TTC results are generally reported on an area to area basis.
Arranged Interchange	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	The state where a Request for Interchange (initial or revised) has been submitted for approval.
Attaining Balancing Authority	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	A Balancing Authority bringing generation or load into its effective control boundaries through a Dynamic Transfer from the Native Balancing Authority.
Automatic Generation Control	Version 0 Reliability Standards	AGC	2/8/2005	3/16/2007		Equipment that automatically adjusts generation in a Balancing Authority Area from a central location to maintain the Balancing Authority's interchange schedule plus Frequency Bias. AGC may also accommodate automatic inadvertent payback and time error correction.
Automatic Time Error Correction (I_{ATEC}) <i>continued below...</i>	Project 2010-14.2.1. Phase 2		2/11/2016		7/1/2016	<p>The addition of a component to the ACE equation for the Western Interconnection that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error. Automatic Time Error Correction is only applicable in the Western Interconnection.</p> $I_{ATEC} = \frac{P_{gen, off peak}}{(1-\gamma)^H}$ <p>when operating in Automatic Time error correction Mode.The absolute value of I_{ATEC} shall not exceed L_{max}. I_{ATEC} shall be zero when operating in any other AGC mode.</p> <ul style="list-style-type: none"> • L_{max} is the maximum value allowed for I_{ATEC} set by each BA between $0.2^* B_i$ and $L10$, $0.2^* B_i \leq L_{max} \leq L10$. • $L_{10} = 1.65 * \epsilon_{10} \sqrt{(-10B_i)(-10B_S)}$. • ϵ_{10} is a constant derived from the targeted frequency bound. It is the targeted root-mean-square (RMS) value of ten-minute average frequency error based on frequency performance over a given year. The bound, ϵ_{10}, is the same for every Balancing Authority Area within an Interconnection.
Automatic Time Error Correction (I_{ATEC})	Project 2010-14.2.1. Phase 2		2/11/2016		7/1/2016	<ul style="list-style-type: none"> • $Y = B_i / BS$. • H = Number of hours used to payback primary inadvertent interchange energy. The value of H is set to 3. <p>B_i = Frequency Bias Setting for the Balancing Authority Area (MW / 0.1 Hz).</p> <ul style="list-style-type: none"> • B_S = Sum of the minimum Frequency Bias Settings for the Interconnection (MW / 0.1 Hz). • Primary Inadvertent Interchange (PII_{hourly}) is $(1-Y) * (II_{actual} - B_i * \Delta TE/6)$ • II_{actual} is the hourly Inadvertent Interchange for the last hour. <p>ΔTE is the hourly change in system Time Error as distributed by the Interconnection time monitor,where: $\Delta TE = TE_{end\ hour} - TE_{begin\ hour} - TD_{adj} - (t)^*(TE_{offset})$</p>

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Automatic Time Error Correction (I_{ATEC})	Project 2010-14.2.1. Phase 2		2/11/2016		7/1/2016	<ul style="list-style-type: none"> • TD_{adj} is the Reliability Coordinator adjustment for differences with Interconnection time monitor control center clocks. • t is the number of minutes of manual Time Error Correction that occurred during the hour. • TE_{offset} is 0.000 or +0.020 or -0.020. • PII_{accum} is the Balancing Authority Area's accumulated PIIhourly in MWh. An On-Peak and Off-Peak accumulation accounting is required, where: $PII_{on/offpeak} = \text{last period's } PII_{accum}^{on/offpeak} + PII_{hourly}$
Available Flowgate Capability	Project 2006-07	AFC	8/22/2008	11/24/2009		A measure of the flow capability remaining on a Flowgate for further commercial activity over and above already committed uses. It is defined as TFC less Existing Transmission Commitments (ETC), less a Capacity Benefit Margin, less a Transmission Reliability Margin, plus Postbacks, and plus counterflows.
Available Transfer Capability	Project 2006-07	ATC	8/22/2008	11/24/2009		A measure of the transfer capability remaining in the physical transmission network for further commercial activity over and above already committed uses. It is defined as Total Transfer Capability less Existing Transmission Commitments (including retail customer service), less a Capacity Benefit Margin, less a Transmission Reliability Margin, plus Postbacks, plus counterflows.
Available Transfer Capability Implementation Document	Project 2006-07	ATCID	8/22/2008	11/24/2009		A document that describes the implementation of a methodology for calculating ATC or AFC, and provides information related to a Transmission Service Provider's calculation of ATC or AFC.
Balancing Authority	Version 0 Reliability Standards	BA	2/8/2005	3/16/2007		The responsible entity that integrates resource plans ahead of time, maintains load-interchange-generation balance within a Balancing Authority Area, and supports Interconnection frequency in real time.
Balancing Authority Area	Version 0 Reliability Standards		2/8/2005	3/16/2007		The collection of generation, transmission, and loads within the metered boundaries of the Balancing Authority. The Balancing Authority maintains load-resource balance within this area.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Balancing Contingency Event	Project 2010-14.1 Phase 1		11/5/2015	1/19/2017	1/1/2018	<p>Any single event described in Subsections (A), (B), or (C) below, or any series of such otherwise single events, with each separated from the next by one minute or less.</p> <p>A. Sudden loss of generation:</p> <ul style="list-style-type: none"> a. Due to <ul style="list-style-type: none"> i. unit tripping, or ii. loss of generator Facility resulting in isolation of the generator from the Bulk Electric System or from the responsible entity's System, or iii. sudden unplanned outage of transmission Facility; b. And, that causes an unexpected change to the responsible entity's ACE; <p>B. Sudden loss of an Import, due to forced outage of transmission equipment that causes an unexpected imbalance between generation and Demand on the Interconnection.</p> <p>C. Sudden restoration of a Demand that was used as a resource that causes an unexpected change to the responsible entity's ACE.</p>
Base Load	Version 0 Reliability		2/8/2005	3/16/2007		The minimum amount of electric power delivered or required over a given period at a constant rate.
BES Cyber Asset	Project 2014-02	BCA	2/12/2015	1/21/2016	7/1/2016	A Cyber Asset that if rendered unavailable, degraded, or misused would, within 15 minutes of its required operation, misoperation, or non-operation, adversely impact one or more Facilities, systems, or equipment, which, if destroyed, degraded, or otherwise rendered unavailable when needed, would affect the reliable operation of the Bulk Electric System. Redundancy of affected Facilities, systems, and equipment shall not be considered when determining adverse impact. Each BES Cyber Asset is included in one or more BES Cyber Systems.
BES Cyber System	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	One or more BES Cyber Assets logically grouped by a responsible entity to perform one or more reliability tasks for a functional entity.
BES Cyber System Information	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	Information about the BES Cyber System that could be used to gain unauthorized access or pose a security threat to the BES Cyber System. BES Cyber System Information does not include individual pieces of information that by themselves do not pose a threat or could not be used to allow unauthorized access to BES Cyber Systems, such as, but not limited to, device names, individual IP addresses without context, ESP names, or policy statements. Examples of BES Cyber System Information may include, but are not limited to, security procedures or security information about BES Cyber Systems, Physical Access Control Systems, and Electronic Access Control or Monitoring Systems that is not publicly available and could be used to allow unauthorized access or unauthorized distribution; collections of network addresses; and network topology of the BES Cyber System.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Blackstart Resource	Project 2015-04		11/5/2015	1/21/2016	7/1/2016	A generating unit(s) and its associated set of equipment which has the ability to be started without support from the System or is designed to remain energized without connection to the remainder of the System, with the ability to energize a bus, meeting the Transmission Operator's restoration plan needs for Real and Reactive Power capability, frequency and voltage control, and that has been included in the Transmission Operator's restoration plan.
Block Dispatch	Project 2006-07		8/22/2008	11/24/2009		A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, the capacity of a given generator is segmented into loadable "blocks," each of which is grouped and ordered relative to other blocks (based on characteristics including, but not limited to, efficiency, run of river or fuel supply considerations, and/or "must-run" status).
Bulk Electric System (Continued below)	Project 2010-17	BES	11/21/2013	3/20/2014	7/1/2014 (Please see the Implementation Plan for Phase 2 Compliance obligations.)	<p>Unless modified by the lists shown below, all Transmission Elements operated at 100 kV or higher and Real Power and Reactive Power resources connected at 100 kV or higher. This does not include facilities used in the local distribution of electric energy.</p> <p>Inclusions:</p> <ul style="list-style-type: none"> • I1 - Transformers with the primary terminal and at least one secondary terminal operated at 100 kV or higher unless excluded by application of Exclusion E1 or E3. • I2 – Generating resource(s) including the generator terminals through the high-side of the step-up transformer(s) connected at a voltage of 100 kV or above with: <ul style="list-style-type: none"> a) Gross individual nameplate rating greater than 20 MVA. Or, b) Gross plant/facility aggregate nameplate rating greater than 75 MVA. • I3 - Blackstart Resources identified in the Transmission Operator's restoration plan. • I4 - Dispersed power producing resources that aggregate to a total capacity greater than 75 MVA (gross nameplate rating), and that are connected through a system designed primarily for delivering such capacity to a common point of connection at a voltage of 100 kV or above. <p>Thus, the facilities designated as BES are:</p>

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Bulk Electric System (continued below)	Project 2010-17	BES	11/21/2013	3/20/2014	7/1/2014 (Please see the Implementation Plan for Phase 2 Compliance obligations.)	<p>a) The individual resources, and</p> <p>b) The system designed primarily for delivering capacity from the point where those resources aggregate to greater than 75 MVA to a common point of connection at a voltage of 100 kV or above.</p> <ul style="list-style-type: none"> • I5 –Static or dynamic devices (excluding generators) dedicated to supplying or absorbing Reactive Power that are connected at 100 kV or higher, or through a dedicated transformer with a high-side voltage of 100 kV or higher, or through a transformer that is designated in Inclusion I1 unless excluded by application of Exclusion E4. <p>Exclusions:</p> <ul style="list-style-type: none"> • E1 - Radial systems: A group of contiguous transmission Elements that emanates from a single point of connection of 100 kV or higher and: <ul style="list-style-type: none"> a) Only serves Load. Or, b) Only includes generation resources, not identified in Inclusions I2, I3, or I4, with an aggregate capacity less than or equal to 75 MVA (gross nameplate rating). Or, c) Where the radial system serves Load and includes generation resources, not identified in Inclusions I2, I3 or I4, with an aggregate capacity of non-retail generation less than or equal to 75 MVA (gross nameplate rating).
Bulk Electric System (continued)	Project 2010-17	BES	11/21/2013	3/20/2014	7/1/2014 (Please see the Implementation Plan for Phase 2 Compliance obligations.)	<p>one-line diagrams for example, does not affect this exclusion.</p> <p>Note 2 – The presence of a contiguous loop, operated at a voltage level of 50 kV or less, between configurations being considered as radial systems, does not affect this exclusion.</p> <ul style="list-style-type: none"> • E2 - A generating unit or multiple generating units on the customer's side of the retail meter that serve all or part of the retail Load with electric energy if: (i) the net capacity provided to the BES does not exceed 75 MVA, and (ii) standby, back-up, and maintenance power services are provided to the generating unit or multiple generating units or to the retail Load by a Balancing Authority, or provided pursuant to a binding obligation with a Generator Owner or Generator Operator, or under terms approved by the applicable regulatory authority. • E3 - Local networks (LN): A group of contiguous transmission Elements operated at less than 300 kV that distribute power to Load rather than transfer bulk power across the interconnected system. LN's emanate from multiple points of connection at 100 kV or higher to improve the level of service to retail customers and not to accommodate bulk power transfer across the interconnected system. The LN is characterized by all of the following: <ul style="list-style-type: none"> a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusions I2, I3, or I4 and do not have an aggregate capacity of non-retail

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Bulk Electric System (continued)	Project 2010-17	BES	11/21/2013	3/20/2014	7/1/2014 (Please see the Implementation Plan for Phase 2 Compliance obligations.)	<p>a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusions I2, I3, or I4 and do not have an aggregate capacity of non-retail generation greater than 75 MVA (gross nameplate rating);</p> <p>b) Real Power flows only into the LN and the LN does not transfer energy originating outside the LN for delivery through the LN; and</p> <p>c) Not part of a Flowgate or transfer path: The LN does not contain any part of a permanent Flowgate in the Eastern Interconnection, a major transfer path within the Western Interconnection, or a comparable monitored Facility in the ERCOT or Quebec Interconnections, and is not a monitored Facility included in an Interconnection Reliability Operating Limit (IROL).</p> <ul style="list-style-type: none"> • E4 – Reactive Power devices installed for the sole benefit of a retail customer(s). <p>Note - Elements may be included or excluded on a case-by-case basis through the Rules of Procedure exception process.</p>
Bulk-Power System	Project 2015-04		11/5/2015	1/21/2016	7/1/2016	<p>Bulk-Power System:</p> <p>(A) facilities and control systems necessary for operating an interconnected electric energy transmission network (or any portion thereof); and</p> <p>(B) electric energy from generation facilities needed to maintain transmission system reliability.</p> <p>The term does not include facilities used in the local distribution of electric energy. (Note that the terms "Bulk-Power System" or "Bulk Power System" shall have the same meaning.)</p>
Burden	Version 0 Reliability Standards		2/8/2005	3/16/2007		Operation of the Bulk Electric System that violates or is expected to violate a System Operating Limit or Interconnection Reliability Operating Limit in the Interconnection, or that violates any other NERC, Regional Reliability Organization, or local operating reliability standards or criteria.
Bus-tie Breaker	Project 2006-02		8/4/2011	10/17/2013	1/1/2015	A circuit breaker that is positioned to connect two individual substation bus configurations.
Capacity Benefit Margin	Version 0 Reliability Standards	CBM	2/8/2005	3/16/2007		The amount of firm transmission transfer capability preserved by the transmission provider for Load-Serving Entities (LSEs), whose loads are located on that Transmission Service Provider's system, to enable access by the LSEs to generation from interconnected systems to meet generation reliability requirements. Preservation of CBM for an LSE allows that entity to reduce its installed generating capacity below that which may otherwise have been necessary without interconnections to meet its generation reliability requirements. The transmission transfer capability preserved as CBM is intended to be used by the LSE only in times of emergency generation deficiencies.
Capacity Benefit Margin Implementation Document	Project 2006-07	CBMID	11/13/2008	11/24/2009		A document that describes the implementation of a Capacity Benefit Margin methodology.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Capacity Emergency	Version 0 Reliability Standards		2/8/2005	3/16/2007		A capacity emergency exists when a Balancing Authority Area's operating capacity, plus firm purchases from other systems, to the extent available or limited by transfer capability, is inadequate to meet its demand plus its regulating requirements.
Cascading	Project 2015-04		11/5/2015	1/21/2016	7/1/2016	The uncontrolled successive loss of System Elements triggered by an incident at any location. Cascading results in widespread electric service interruption that cannot be restrained from sequentially spreading beyond an area predetermined by studies.
CIP Exceptional Circumstance	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	A situation that involves or threatens to involve one or more of the following, or similar, conditions that impact safety or BES reliability: a risk of injury or death; a natural disaster; civil unrest; an imminent or existing hardware, software, or equipment failure; a Cyber Security Incident requiring emergency assistance; a response by emergency services; the enactment of a mutual assistance agreement; or an impediment of large scale workforce availability.
CIP Senior Manager	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	A single senior management official with overall authority and responsibility for leading and managing implementation of and continuing adherence to the requirements within the NERC CIP Standards, CIP-002 through CIP-011.
Clock Hour	Version 0 Reliability Standards		2/8/2005	3/16/2007		The 60-minute period ending at :00. All surveys, measurements, and reports are based on Clock Hour periods unless specifically noted.
Cogeneration	Version 0 Reliability Standards		2/8/2005	3/16/2007		Production of electricity from steam, heat, or other forms of energy produced as a by-product of another process.
Compliance Monitor	Version 0 Reliability Standards		2/8/2005	3/16/2007		The entity that monitors, reviews, and ensures compliance of responsible entities with reliability standards.
Composite Confirmed Interchange	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	The energy profile (including non-default ramp) throughout a given time period, based on the aggregate of all Confirmed Interchange occurring in that time period.
Composite Protection System	2010-05.1		8/14/2014	5/13/2015	7/1/2016	The total complement of Protection System(s) that function collectively to protect an Element. Backup protection provided by a different Element's Protection System(s) is excluded.
Confirmed Interchange	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	The state where no party has denied and all required parties have approved the Arranged Interchange.
Congestion Management Report	Version 0 Reliability Standards		2/8/2005	3/16/2007		A report that the Interchange Distribution Calculator issues when a Reliability Coordinator initiates the Transmission Loading Relief procedure. This report identifies the transactions and native and network load curtailments that must be initiated to achieve the loading relief requested by the initiating Reliability Coordinator.
Consequential Load Loss	Project 2006-02		8/4/2011	10/17/2013	1/1/2015	All Load that is no longer served by the Transmission system as a result of Transmission Facilities being removed from service by a Protection System operation designed to isolate the fault.
Constrained Facility	Version 0 Reliability Standards		2/8/2005	3/16/2007		A transmission facility (line, transformer, breaker, etc.) that is approaching, is at, or is beyond its System Operating Limit or Interconnection Reliability Operating Limit.
Contingency	Version 0 Reliability Standards		2/8/2005	3/16/2007		The unexpected failure or outage of a system component, such as a generator, transmission line, circuit breaker, switch or other electrical element.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Contingency Event Recovery Period	Project 2010-14.1 Phase 1		11/5/2015	1/19/2017	1/1/2018	A period that begins at the time that the resource output begins to decline within the first one-minute interval of a Reportable Balancing Contingency Event, and extends for fifteen minutes thereafter.
Contingency Reserve	Project 2010-14.1 Phase 1		11/5/2015	1/19/2017	1/1/2018	<p>The provision of capacity that may be deployed by the Balancing Authority to respond to a Balancing Contingency Event and other contingency requirements (such as Energy Emergency Alerts as specified in the associated EOP standard). A Balancing Authority may include in its restoration of Contingency Reserve readiness to reduce Firm Demand and include it if, and only if, the Balancing Authority:</p> <ul style="list-style-type: none"> • is experiencing a Reliability Coordinator declared Energy Emergency Alert level, and is utilizing its Contingency Reserve to mitigate an operating emergency in accordance with its emergency Operating Plan. • is utilizing its Contingency Reserve to mitigate an operating emergency in accordance with its emergency Operating Plan.
Contingency Reserve Restoration Period	Project 2010-14.1 Phase 1		11/5/2015	1/19/2017	1/1/2018	A period not exceeding 90 minutes following the end of the Contingency Event Recovery Period.
Contact Path	Version 0 Reliability Standards		2/8/2005	3/16/2007		An agreed upon electrical path for the continuous flow of electrical power between the parties of an Interchange Transaction.
Control Center	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	One or more facilities hosting operating personnel that monitor and control the Bulk Electric System (BES) in real-time to perform the reliability tasks, including their associated data centers, of: 1) a Reliability Coordinator, 2) a Balancing Authority, 3) a Transmission Operator for transmission Facilities at two or more locations, or 4) a Generator Operator for generation Facilities at two or more locations.
Control Performance Standard	Version 0 Reliability Standards	CPS	2/8/2005	3/16/2007		The reliability standard that sets the limits of a Balancing Authority's Area Control Error over a specified time period.
Corrective Action Plan	Phase III-IV Planning Standards - Archive		2/7/2006	3/16/2007		A list of actions and an associated timetable for implementation to remedy a specific problem.
Cranking Path	Phase III-IV Planning Standards - Archive		5/2/2006	3/16/2007		A portion of the electric system that can be isolated and then energized to deliver electric power from a generation source to enable the startup of one or more other generating units.
Curtailment	Version 0 Reliability Standards		2/8/2005	3/16/2007		A reduction in the scheduled capacity or energy delivery of an Interchange Transaction.
Curtailment Threshold	Version 0 Reliability Standards		2/8/2005	3/16/2007		The minimum Transfer Distribution Factor which, if exceeded, will subject an Interchange Transaction to curtailment to relieve a transmission facility constraint.
Cyber Assets	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	Programmable electronic devices, including the hardware, software, and data in those devices.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Cyber Security Incident	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	A malicious act or suspicious event that: <ul style="list-style-type: none">• Compromises, or was an attempt to compromise, the Electronic Security Perimeter or Physical Security Perimeter or,• Disrupts, or was an attempt to disrupt, the operation of a BES Cyber System.
Delayed Fault Clearing	Determine Facility Ratings, Operating Limits, and Transfer Capabilities		11/1/2006	12/27/2007		Fault clearing consistent with correct operation of a breaker failure protection system and its associated breakers, or of a backup protection system with an intentional time delay.
Demand	Version 0 Reliability Standards		2/8/2005	3/16/2007		1. The rate at which electric energy is delivered to or by a system or part of a system, generally expressed in kilowatts or megawatts, at a given instant or averaged over any designated interval of time. 2. The rate at which energy is being used by the customer.
Demand-Side Management	Project 2010-04	DSM	5/6/2014	2/19/2015	7/1/2016	All activities or programs undertaken by any applicable entity to achieve a reduction in Demand.
Dial-up Connectivity	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	A data communication link that is established when the communication equipment dials a phone number and negotiates a connection with the equipment on the other end of the link.
Direct Control Load Management	Project 2008-06	DCLM	2/8/2005	3/16/2007		Demand-Side Management that is under the direct control of the system operator. DCLM may control the electric supply to individual appliances or equipment on customer premises. DCLM as defined here does not include Interruptible Demand.
Dispatch Order	Project 2006-07		8/22/2008	11/24/2009		A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, each generator is ranked by priority.
Dispersed Load by Substations	Version 0 Reliability Standards		2/8/2005	3/16/2007		Substation load information configured to represent a system for power flow or system dynamics modeling purposes, or both.
Distribution Factor	Version 0 Reliability Standards	DF	2/8/2005	3/16/2007		The portion of an Interchange Transaction, typically expressed in per unit that flows across a transmission facility (Flowgate).
Distribution Provider	Project 2015-04	DP	11/5/2015	1/21/2016	7/1/2016	Provides and operates the "wires" between the transmission system and the end-use customer. For those end-use customers who are served at transmission voltages, the Transmission Owner also serves as the Distribution Provider. Thus, the Distribution Provider is not defined by a specific voltage, but rather as performing the distribution function at any voltage.
Disturbance	Version 0 Reliability Standards		2/8/2005	3/16/2007		1. An unplanned event that produces an abnormal system condition. 2. Any perturbation to the electric system. 3. The unexpected change in ACE that is caused by the sudden failure of generation or interruption of load.
Disturbance Control Standard	Version 0 Reliability Standards	DCS	2/8/2005	3/16/2007		The reliability standard that sets the time limit following a Disturbance within which a Balancing Authority must return its Area Control Error to within a specified range.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Disturbance Monitoring Equipment	Phase III-IV Planning Standards	DME	8/2/2006	3/16/2007		<p>Devices capable of monitoring and recording system data pertaining to a Disturbance. Such devices include the following categories of recorders* :</p> <ul style="list-style-type: none"> • Sequence of event recorders which record equipment response to the event • Fault recorders, which record actual waveform data replicating the system primary voltages and currents. This may include protective relays. • Dynamic Disturbance Recorders (DDRs), which record incidents that portray power system behavior during dynamic events such as low-frequency (0.1 Hz – 3 Hz) oscillations and abnormal frequency or voltage excursions <p>*Phasor Measurement Units and any other equipment that meets the functional requirements of DMEs may qualify as DMEs.</p>
Dynamic Interchange Schedule or Dynamic Schedule	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	A time-varying energy transfer that is updated in Real-time and included in the Scheduled Net Interchange (NIS) term in the same manner as an Interchange Schedule in the affected Balancing Authorities' control ACE equations (or alternate control processes).
Dynamic Transfer	Version 0 Reliability Standards		2/8/2005	3/16/2007		The provision of the real-time monitoring, telemetering, computer software, hardware, communications, engineering, energy accounting (including inadvertent interchange), and administration required to electronically move all or a portion of the real energy services associated with a generator or load out of one Balancing Authority Area into another.
Economic Dispatch	Version 0 Reliability Standards		2/8/2005	3/16/2007		The allocation of demand to individual generating units on line to effect the most economical production of electricity.
Electronic Access Control or Monitoring Systems	Project 2008-06 Order 706	EACMS	11/26/2012	11/22/2013	7/1/2016	Cyber Assets that perform electronic access control or electronic access monitoring of the Electronic Security Perimeter(s) or BES Cyber Systems. This includes Intermediate Systems.
Electronic Access Point	Project 2008-06 Order 706	EAP	11/26/2012	11/22/2013	7/1/2016	A Cyber Asset interface on an Electronic Security Perimeter that allows routable communication between Cyber Assets outside an Electronic Security Perimeter and Cyber Assets inside an Electronic Security Perimeter.
Electrical Energy	Version 0 Reliability Standards		2/8/2005	3/16/2007		The generation or use of electric power by a device over a period of time, expressed in kilowatthours (kWh), megawatthours (MWh), or gigawatthours (GWh).
Electronic Security Perimeter	Project 2008-06 Order 706	ESP	11/26/2012	11/22/2013	7/1/2016	The logical border surrounding a network to which BES Cyber Systems are connected using a routable protocol.
Element	Project 2015-04		11/5/2015	1/21/2016	7/1/2016	Any electrical device with terminals that may be connected to other electrical devices such as a generator, transformer, circuit breaker, bus section, or transmission line. An Element may be comprised of one or more components.
Emergency or BES Emergency	Version 0 Reliability Standards		2/8/2005	3/16/2007		Any abnormal system condition that requires automatic or immediate manual action to prevent or limit the failure of transmission facilities or generation supply that could adversely affect the reliability of the Bulk Electric System.
Emergency Rating	Version 0 Reliability Standards		2/8/2005	3/16/2007		The rating as defined by the equipment owner that specifies the level of electrical loading or output, usually expressed in megawatts (MW) or Mvar or other appropriate units, that a system, facility, or element can support, produce, or withstand for a finite period. The rating assumes acceptable loss of equipment life or other physical or safety limitations for the equipment involved.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Emergency Request for Interchange	Project 2007-14 Coordinate Interchange	Emergency RFI	10/29/2008	12/17/2009		Request for Interchange to be initiated for Emergency or Energy Emergency conditions.
Energy Emergency	Version 0		11/13/2014	11/19/2015	4/1/2017	A condition when a Load-Serving Entity or Balancing Authority has exhausted all other resource options and can no longer meet its expected Load obligations.
Equipment Rating	Determine Facility Ratings, Operating Limits, and Transfer Capabilities		2/7/2006	3/16/2007		The maximum and minimum voltage, current, frequency, real and reactive power flows on individual equipment under steady state, short-circuit and transient conditions, as permitted or assigned by the equipment owner.
External Routable Connectivity	Project 2008-06 Order 706		11/26/2012	11/22/2013	7/1/2016	The ability to access a BES Cyber System from a Cyber Asset that is outside of its associated Electronic Security Perimeter via a bi-directional routable protocol connection.
Existing Transmission Commitments	Project 2006-07	ETC	8/22/2008	11/24/2009		Committed uses of a Transmission Service Provider's Transmission system considered when determining ATC or AFC.
Facility	Determine Facility Ratings, Operating Limits, and Transfer Capabilities		2/7/2006	3/16/2007		A set of electrical equipment that operates as a single Bulk Electric System Element (e.g., a line, a generator, a shunt compensator, transformer, etc.)
Facility Rating	Version 0 Reliability Standards		2/8/2005	3/16/2007		The maximum or minimum voltage, current, frequency, or real or reactive power flow through a facility that does not violate the applicable equipment rating of any equipment comprising the facility.
Fault	Version 0 Reliability Standards		2/8/2005	3/16/2007		An event occurring on an electric system such as a short circuit, a broken wire, or an intermittent connection.
Fire Risk	Project 2007-07		2/7/2006	3/16/2007		The likelihood that a fire will ignite or spread in a particular geographic area.
Firm Demand	Version 0 Reliability Standards		2/8/2005	3/16/2007		That portion of the Demand that a power supplier is obligated to provide except when system reliability is threatened or during emergency conditions.
Firm Transmission Service	Version 0 Reliability Standards		2/8/2005	3/16/2007		The highest quality (priority) service offered to customers under a filed rate schedule that anticipates no planned interruption.
Flashover	Project 2007-07		2/7/2006	3/16/2007		An electrical discharge through air around or over the surface of insulation, between objects of different potential, caused by placing a voltage across the air space that results in the ionization of the air space.
Flowgate	Project 2006-07		8/22/2008	11/24/2009		1.) A portion of the Transmission system through which the Interchange Distribution Calculator calculates the power flow from Interchange Transactions. 2.) A mathematical construct, comprised of one or more monitored transmission Facilities and optionally one or more contingency Facilities, used to analyze the impact of power flows upon the Bulk Electric System.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Flowgate Methodology	Version 0 Reliability Standards		8/22/2008	11/24/2009		The Flowgate methodology is characterized by identification of key Facilities as Flowgates. Total Flowgate Capabilities are determined based on Facility Ratings and voltage and stability limits. The impacts of Existing Transmission Commitments (ETCs) are determined by simulation. The impacts of ETC, Capacity Benefit Margin (CBM) and Transmission Reliability Margin (TRM) are subtracted from the Total Flowgate Capability, and Postbacks and counterflows are added, to determine the Available Flowgate Capability (AFC) value for that Flowgate. AFCs can be used to determine Available Transfer Capability (ATC).
Forced Outage	Version 0 Reliability Standards		2/8/2005	3/16/2007		1. The removal from service availability of a generating unit, transmission line, or other facility for emergency reasons. 2. The condition in which the equipment is unavailable due to unanticipated failure.
Frequency Bias	Version 0 Reliability Standards		2/8/2005	3/16/2007		A value, usually expressed in megawatts per 0.1 Hertz (MW/0.1 Hz), associated with a Balancing Authority Area that approximates the Balancing Authority Area's response to Interconnection frequency error.
Frequency Bias Setting	Project 2007-12		2/7/2013	1/16/2014	4/1/2015	A number, either fixed or variable, usually expressed in MW/0.1 Hz, included in a Balancing Authority's Area Control Error equation to account for the Balancing Authority's inverse Frequency Response contribution to the Interconnection, and discourage response withdrawal through secondary control systems.
Frequency Deviation	Version 0		2/8/2005	3/16/2007		A change in Interconnection frequency.
Frequency Error	Version 0 Reliability Standards		2/8/2005	3/16/2007		The difference between the actual and scheduled frequency. ($F_A - F_S$)
Frequency Regulation	Version 0 Reliability Standards		2/8/2005	3/16/2007		The ability of a Balancing Authority to help the Interconnection maintain Scheduled Frequency. This assistance can include both turbine governor response and Automatic Generation Control.
Frequency Response	Version 0 Reliability Standards		2/8/2005	3/16/2007		(Equipment) The ability of a system or elements of the system to react or respond to a change in system frequency. (System) The sum of the change in demand, plus the change in generation, divided by the change in frequency, expressed in megawatts per 0.1 Hertz (MW/0.1 Hz).
Frequency Response Measure	Project 2007-12	FRM	2/7/2013	1/16/2014	4/1/2015	The median of all the Frequency Response observations reported annually by Balancing Authorities or Frequency Response Sharing Groups for frequency events specified by the ERO. This will be calculated as MW/0.1Hz.
Frequency Response Obligation	Project 2007-12	FRO	2/7/2013	1/16/2014	4/1/2015	The Balancing Authority's share of the required Frequency Response needed for the reliable operation of an Interconnection. This will be calculated as MW/0.1Hz.
Frequency Response Sharing Group	Project 2007-12	FRSG	2/7/2013	1/16/2014	4/1/2015	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating resources required to jointly meet the sum of the Frequency Response Obligations of its members.
Generator Operator	Version 0 Reliability Standards	GOP	11/5/2015	1/21/2016	7/1/2016	The entity that operates generating Facility(ies) and performs the functions of supplying energy and Interconnected Operations Services.
Generator Owner	Version 0	GO	11/5/2015	1/21/2016	7/1/2016	Entity that owns and maintains generating Facility(ies).

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Generator Shift Factor	Version 0 Reliability Standards	GSF	2/8/2005	3/16/2007		A factor to be applied to a generator's expected change in output to determine the amount of flow contribution that change in output will impose on an identified transmission facility or Flowgate.
Generator-to-Load Distribution Factor	Version 0 Reliability Standards	GLDF	2/8/2005	3/16/2007		The algebraic sum of a Generator Shift Factor and a Load Shift Factor to determine the total impact of an Interchange Transaction on an identified transmission facility or Flowgate.
Generation Capability Import Requirement	Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions	GCIR	11/13/2008	11/24/2009		The amount of generation capability from external sources identified by a Load-Serving Entity (LSE) or Resource Planner (RP) to meet its generation reliability or resource adequacy requirements as an alternative to internal resources.
Geomagnetic Disturbance Vulnerability Assessment or GMD Vulnerability Assessment	Project 2013-03 Geomagnetic Disturbance Mitigation	GMD	12/17/2014	9/22/2016	7/1/2017	Documented evaluation of potential susceptibility to voltage collapse, Cascading, or localized damage of equipment due to geomagnetic disturbances.
Host Balancing Authority	Version 0 Reliability Standards		2/8/2005	3/16/2007		1. A Balancing Authority that confirms and implements Interchange Transactions for a Purchasing Selling Entity that operates generation or serves customers directly within the Balancing Authority's metered boundaries. 2. The Balancing Authority within whose metered boundaries a jointly owned unit is physically located.
Hourly Value	Version 0 Reliability		2/8/2005	3/16/2007		Data measured on a Clock Hour basis.
Implemented Interchange	Coordinate Interchange		5/2/2006	3/16/2007		The state where the Balancing Authority enters the Confirmed Interchange into its Area Control Error equation.
Inadvertent Interchange	Version 0 Reliability Standards		2/8/2005	3/16/2007		The difference between the Balancing Authority's Net Actual Interchange and Net Scheduled Interchange. (IA – IS)
Independent Power Producer	Version 0 Reliability Standards	IPP	2/8/2005	3/16/2007		Any entity that owns or operates an electricity generating facility that is not included in an electric utility's rate base. This term includes, but is not limited to, cogenerators and small power producers and all other nonutility electricity producers, such as exempt wholesale generators, who sell electricity.
Institute of Electrical and Electronics Engineers, Inc.	Project 2007-07	IEEE	2/7/2006	3/16/2007		
Interactive Remote Access	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	User-initiated access by a person employing a remote access client or other remote access technology using a routable protocol. Remote access originates from a Cyber Asset that is not an Intermediate System and not located within any of the Responsible Entity's Electronic Security Perimeter(s) or at a defined Electronic Access Point (EAP). Remote access may be initiated from: 1) Cyber Assets used or owned by the Responsible Entity, 2) Cyber Assets used or owned by employees, and 3) Cyber Assets used or owned by vendors, contractors, or consultants. Interactive remote access does not include system-to-system process communications.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Interchange	Coordinate Interchange		5/2/2006	3/16/2007		Energy transfers that cross Balancing Authority boundaries.
Interchange Authority	Project 2015-04	IA	11/5/2015	1/21/2016	7/1/2016	The responsible entity that authorizes the implementation of valid and balanced Interchange Schedules between Balancing Authority Areas, and ensures communication of Interchange information for reliability assessment purposes.
Interchange Distribution Calculator	Version 0 Reliability Standards		2/8/2005	3/16/2007		The mechanism used by Reliability Coordinators in the Eastern Interconnection to calculate the distribution of Interchange Transactions over specific Flowgates. It includes a database of all Interchange Transactions and a matrix of the Distribution Factors for the Eastern Interconnection.
Interchange Meter Error (I_{ME})	Project 2010-14.2.1. Phase 2		2/11/2016		7/1/2016	A term used in the Reporting ACE calculation to compensate for data or equipment errors affecting any other components of the Reporting ACE calculation.
Interchange Schedule	Version 0 Reliability Standards		2/8/2005	3/16/2007		An agreed-upon Interchange Transaction size (megawatts), start and end time, beginning and ending ramp times and rate, and type required for delivery and receipt of power and energy between the Source and Sink Balancing Authorities involved in the transaction.
Interchange Transaction	Version 0 Reliability Standards		2/8/2005	3/16/2007		An agreement to transfer energy from a seller to a buyer that crosses one or more Balancing Authority Area boundaries.
Interchange Transaction Tag or Tag	Version 0 Reliability Standards		2/8/2005	3/16/2007		The details of an Interchange Transaction required for its physical implementation.
Interconnected Operations Service	Project 2015-04		11/5/2015	1/21/2016	7/1/2016	A service (exclusive of basic energy and Transmission Services) that is required to support the Reliable Operation of interconnected Bulk Electric Systems.
Interconnection	Project 2015-04		11/5/2015	1/21/2016	7/1/2016	A geographic area in which the operation of Bulk Power System components is synchronized such that the failure of one or more of such components may adversely affect the ability of the operators of other components within the system to maintain Reliable Operation of the Facilities within their control. When capitalized, any one of the four major electric system networks in North America: Eastern, Western, ERCOT and Quebec.
Interconnection Reliability Operating Limit	Determine Facility Ratings, Operating Limits, and Transfer Capabilities	IROL	11/1/2006	12/27/2007		A System Operating Limit that, if violated, could lead to instability, uncontrolled separation, or Cascading outages that adversely impact the reliability of the Bulk Electric System.
Interconnection Reliability Operating Limit T_v	Determine Facility Ratings, Operating Limits, and Transfer Capabilities	IROL T_v	11/1/2006	12/27/2007		The maximum time that an Interconnection Reliability Operating Limit can be violated before the risk to the interconnection or other Reliability Coordinator Area(s) becomes greater than acceptable. Each Interconnection Reliability Operating Limit's T_v shall be less than or equal to 30 minutes.
Intermediate Balancing Authority	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	A Balancing Authority on the scheduling path of an Interchange Transaction other than the Source Balancing Authority and Sink Balancing Authority.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Intermediate System	Project 2008-06		11/26/2012	11/22/2013	7/1/2016	A Cyber Asset or collection of Cyber Assets performing access control to restrict Interactive Remote Access to only authorized users. The Intermediate System must not be located inside the Electronic Security Perimeter.
Interpersonal Communication	Project 2006-06		11/7/2012	4/16/2015	10/1/2015	Any medium that allows two or more individuals to interact, consult, or exchange information.
Interruptible Load or Interruptible Demand	Version 0 Reliability Standards		11/1/2006	3/16/2007		Demand that the end-use customer makes available to its Load-Serving Entity via contract or agreement for curtailment.
Joint Control	Version 0 Reliability Standards		2/8/2005	3/16/2007		Automatic Generation Control of jointly owned units by two or more Balancing Authorities.
Limiting Element	Version 0 Reliability Standards		2/8/2005	3/16/2007		The element that is 1.)Either operating at its appropriate rating, or 2,) Would be following the limiting contingency. Thus, the Limiting Element establishes a system limit.
Load	Version 0 Reliability Standards		2/8/2005	3/16/2007		An end-use device or customer that receives power from the electric system.
Load Shift Factor	Version 0 Reliability Standards	LSF	2/8/2005	3/16/2007		A factor to be applied to a load's expected change in demand to determine the amount of flow contribution that change in demand will impose on an identified transmission facility or monitored Flowgate.
Load-Serving Entity	Project 2015-04	LSE	11/5/2015	1/21/2016	7/1/2016	Secures energy and Transmission Service (and related Interconnected Operations Services) to serve the electrical demand and energy requirements of its end-use customers.
Long-Term Transmission Planning Horizon	Project 2006-02		8/4/2011	10/17/2013	1/1/2015	Transmission planning period that covers years six through ten or beyond when required to accommodate any known longer lead time projects that may take longer than ten years to complete.
Low Impact BES Cyber System Electronic Access Point	Project 2014-02	LEAP	2/12/2015	1/21/2016	7/1/2016	A Cyber Asset interface that controls Low Impact External Routable Connectivity. The Cyber Asset containing the LEAP may reside at a location external to the asset or assets containing low impact BES Cyber Systems.
Low Impact External Routable Connectivity	Project 2014-02	LERC	2/12/2015	1/21/2016	7/1/2016	Direct user-initiated interactive access or a direct device-to-device connection to a low impact BES Cyber System(s) from a Cyber Asset outside the asset containing those low impact BES Cyber System(s) via a bi-directional routable protocol connection. Point-to-point communications between intelligent electronic devices that use routable communication protocols for time-sensitive protection or control functions between Transmission station or substation assets containing low impact BES Cyber Systems are excluded from this definition (examples of this communication include, but are not limited to, IEC 61850 GOOSE or vendor proprietary protocols).
Market Flow	Project 2006-08 Reliability Coordination - Transmission Loading Relief		11/4/2010	4/21/2011		The total amount of power flowing across a specified Facility or set of Facilities due to a market dispatch of generation internal to the market to serve load internal to the market.
Minimum Vegetation Clearance Distance	Project 2007-07	MVCD	11/3/2011	3/21/2013	7/1/2014	The calculated minimum distance stated in feet (meters) to prevent flash-over between conductors and vegetation, for various altitudes and operating voltages.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Misoperation	Project 2010-05.1		8/14/2014	5/13/2015	7/1/2016	<p>The failure of a Composite Protection System to operate as intended for protection purposes. Any of the following is a Misoperation:</p> <p>1. Failure to Trip – During Fault – A failure of a Composite Protection System to operate for a Fault condition for which it is designed. The failure of a Protection System component is not a Misoperation as long as the performance of the Composite Protection System is correct.</p> <p>2. Failure to Trip – Other Than Fault – A failure of a Composite Protection System to operate for a non-Fault condition for which it is designed, such as a power swing, undervoltage, overexcitation, or loss of excitation. The failure of a Protection System component is not a Misoperation as long as the performance of the Composite Protection System is correct.</p> <p>3. Slow Trip – During Fault – A Composite Protection System operation that is slower than required for a Fault condition if the duration of its operating time resulted in the operation of at least one other Element's Composite Protection System. (continued below...)</p>
Misoperation (continued...)	Project 2010-05.1		8/14/2014	5/13/2015	7/1/2016	<p>4. Slow Trip – Other Than Fault – A Composite Protection System operation that is slower than required for a non-Fault condition, such as a power swing, undervoltage, overexcitation, or loss of excitation, if the duration of its operating time resulted in the operation of at least one other Element's Composite Protection System.</p> <p>5. Unnecessary Trip – During Fault – An unnecessary Composite Protection System operation for a Fault condition on another Element.</p> <p>6. Unnecessary Trip – Other Than Fault – An unnecessary Composite Protection System operation for a non-Fault condition. A Composite Protection System operation that is caused by personnel during on-site maintenance, testing, inspection, construction, or commissioning activities is not a Misoperation.</p>
Most Severe Single Contingency	Project 2010-14.1 Phase 1	MSSC	11/5/2015	1/19/2017	1/1/2018	The Balancing Contingency Event, due to a single contingency identified using system models maintained within the Reserve Sharing Group (RSG) or a Balancing Authority's area that is not part of a Reserve Sharing Group, that would result in the greatest loss (measured in MW) of resource output used by the RSG or a Balancing Authority that is not participating as a member of a RSG at the time of the event to meet Firm Demand and export obligation (excluding export obligation for which Contingency Reserve obligations are being met by the Sink Balancing Authority).
Native Balancing Authority	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	A Balancing Authority from which a portion of its physically interconnected generation and/or load is transferred from its effective control boundaries to the Attaining Balancing Authority through a Dynamic Transfer.
Native Load	Version 0 Reliability Standards		2/8/2005	3/16/2007		The end-use customers that the Load-Serving Entity is obligated to serve.
Near-Term Transmission Planning Horizon	Project 2010-10		1/24/2011	11/17/2011		The transmission planning period that covers Year One through five.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Net Actual Interchange	Version 0 Reliability Standards		2/8/2005	3/16/2007		The algebraic sum of all metered interchange over all interconnections between two physically Adjacent Balancing Authority Areas.
Net Energy for Load	Version 0 Reliability Standards		2/8/2005	3/16/2007		Net Balancing Authority Area generation, plus energy received from other Balancing Authority Areas, less energy delivered to Balancing Authority Areas through interchange. It includes Balancing Authority Area losses but excludes energy required for storage at energy storage facilities.
Net Interchange Schedule	Version 0 Reliability Standards		2/8/2005	3/16/2007		The algebraic sum of all Interchange Schedules with each Adjacent Balancing Authority.
Net Scheduled Interchange	Version 0 Reliability Standards		2/8/2005	3/16/2007		The algebraic sum of all Interchange Schedules across a given path or between Balancing Authorities for a given period or instant in time.
Network Integration Transmission Service	Version 0 Reliability Standards		2/8/2005	3/16/2007		Service that allows an electric transmission customer to integrate, plan, economically dispatch and regulate its network reserves in a manner comparable to that in which the Transmission Owner serves Native Load customers.
Non-Consequential Load Loss	Project 2006-02		8/4/2011	10/17/2013	1/1/2015	Non-Interruptible Load loss that does not include: (1) Consequential Load Loss, (2) the response of voltage sensitive Load, or (3) Load that is disconnected from the System by end-user equipment.
Non-Firm Transmission Service	Version 0 Reliability Standards		2/8/2005	3/16/2007		Transmission service that is reserved on an as-available basis and is subject to curtailment or interruption.
Non-Spinning Reserve	Version 0 Reliability Standards		2/8/2005	3/16/2007		1. That generating reserve not connected to the system but capable of serving demand within a specified time. 2. Interruptible load that can be removed from the system in a specified time.
Normal Clearing	Determine Facility Ratings, Operating Limits, and Transfer Capabilities		11/1/2006	12/27/2007		A protection system operates as designed and the fault is cleared in the time normally expected with proper functioning of the installed protection systems.
Normal Rating	Version 0 Reliability Standards		2/8/2005	3/16/2007		The rating as defined by the equipment owner that specifies the level of electrical loading, usually expressed in megawatts (MW) or other appropriate units that a system, facility, or element can support or withstand through the daily demand cycles without loss of equipment life.
Nuclear Plant Generator Operator	Project 2009-08		5/2/2007	10/16/2008		Any Generator Operator or Generator Owner that is a Nuclear Plant Licensee responsible for operation of a nuclear facility licensed to produce commercial power.
Nuclear Plant Off-site Power Supply (Off-site Power)	Project 2009-08		5/2/2007	10/16/2008		The electric power supply provided from the electric system to the nuclear power plant distribution system as required per the nuclear power plant license.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Nuclear Plant Licensing Requirements	Project 2009-08	NPLRs	5/2/2007	10/16/2008		Requirements included in the design basis of the nuclear plant and statutorily mandated for the operation of the plant, including nuclear power plant licensing requirements for: 1) Off-site power supply to enable safe shutdown of the plant during an electric system or plant event; and 2) Avoiding preventable challenges to nuclear safety as a result of an electric system disturbance, transient, or condition.
Nuclear Plant Interface Requirements	Project 2009-08	NPIRs	5/2/2007	10/16/2008		The requirements based on NPLRs and Bulk Electric System requirements that have been mutually agreed to by the Nuclear Plant Generator Operator and the applicable Transmission Entities.
Off-Peak	Version 0 Reliability Standards		2/8/2005	3/16/2007		Those hours or other periods defined by NAESB business practices, contract, agreements, or guides as periods of lower electrical demand.
On-Peak	Version 0 Reliability Standards		2/8/2005	3/16/2007		Those hours or other periods defined by NAESB business practices, contract, agreements, or guides as periods of higher electrical demand.
Open Access Same Time Information Service	Version 0 Reliability Standards	OASIS	2/8/2005	3/16/2007		An electronic posting system that the Transmission Service Provider maintains for transmission access data and that allows all transmission customers to view the data simultaneously.
Open Access Transmission Tariff	Version 0 Reliability Standards	OATT	2/8/2005	3/16/2007		Electronic transmission tariff accepted by the U.S. Federal Energy Regulatory Commission requiring the Transmission Service Provider to furnish to all shippers with non-discriminating service comparable to that provided by Transmission Owners to themselves.
Operating Instruction	Project 2007-02		5/6/2014	4/16/2015	7/1/2016	A command by operating personnel responsible for the Real-time operation of the interconnected Bulk Electric System to change or preserve the state, status, output, or input of an Element of the Bulk Electric System or Facility of the Bulk Electric System. (A discussion of general information and of potential options or alternatives to resolve Bulk Electric System operating concerns is not a command and is not considered an Operating Instruction.)
Operating Plan	Coordinate Operations		2/7/2006	3/16/2007		A document that identifies a group of activities that may be used to achieve some goal. An Operating Plan may contain Operating Procedures and Operating Processes. A company-specific system restoration plan that includes an Operating Procedure for black-starting units, Operating Processes for communicating restoration progress with other entities, etc., is an example of an Operating Plan.
Operating Procedure	Coordinate Operations		2/7/2006	3/16/2007		A document that identifies specific steps or tasks that should be taken by one or more specific operating positions to achieve specific operating goal(s). The steps in an Operating Procedure should be followed in the order in which they are presented, and should be performed by the position(s) identified. A document that lists the specific steps for a system operator to take in removing a specific transmission line from service is an example of an Operating Procedure.
Operating Process	Coordinate Operations		2/7/2006	3/16/2007		A document that identifies general steps for achieving a generic operating goal. An Operating Process includes steps with options that may be selected depending upon Real-time conditions. A guideline for controlling high voltage is an example of an Operating Process.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Operating Reserve	Version 0 Reliability Standards		2/8/2005	3/16/2007		That capability above firm system demand required to provide for regulation, load forecasting error, equipment forced and scheduled outages and local area protection. It consists of spinning and non-spinning reserve.
Operating Reserve – Spinning	Version 0 Reliability Standards		2/8/2005	3/16/2007		The portion of Operating Reserve consisting of: <ul style="list-style-type: none">• Generation synchronized to the system and fully available to serve load within the Disturbance Recovery Period following the contingency event; or• Load fully removable from the system within the Disturbance Recovery Period following the contingency event.
Operating Reserve – Supplemental	Version 0 Reliability Standards		2/8/2005	3/16/2007		The portion of Operating Reserve consisting of: <ul style="list-style-type: none">• Generation (synchronized or capable of being synchronized to the system) that is fully available to serve load within the Disturbance Recovery Period following the contingency event; or• Load fully removable from the system within the Disturbance Recovery Period following the contingency event.
Operating Voltage	Project 2007-07		2/7/2006	3/16/2007		The voltage level by which an electrical system is designated and to which certain operating characteristics of the system are related; also, the effective (root-mean-square) potential difference between any two conductors or between a conductor and the ground. The actual voltage of the circuit may vary somewhat above or below this value.
Operational Planning Analysis	Project 2014-03	OPA	11/13/2014	11/19/2015	1/1/2017	An evaluation of projected system conditions to assess anticipated (pre-Contingency) and potential (post-Contingency) conditions for next-day operations. The evaluation shall reflect applicable inputs including, but not limited to, load forecasts; generation output levels; Interchange; known Protection System and Special Protection System status or degradation; Transmission outages; generator outages; Facility Ratings; and identified phase angle and equipment limitations. (Operational Planning Analysis may be provided through internal systems or through third-party services.)
Operations Support Personnel	Project 2010-01		2/6/2014	6/19/2014	7/1/2016	Individuals who perform current day or next day outage coordination or assessments, or who determine SOLs, IROLs, or operating nomograms, ¹ in direct support of Real-time operations of the Bulk Electric System.
Outage Transfer Distribution Factor	Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions	OTDF	8/22/2008	11/24/2009		In the post-contingency configuration of a system under study, the electric Power Transfer Distribution Factor (PTDF) with one or more system Facilities removed from service (outaged).
Overlap Regulation Service	Version 0 Reliability Standards		2/8/2005	3/16/2007		A method of providing regulation service in which the Balancing Authority providing the regulation service incorporates another Balancing Authority's actual interchange, frequency response, and schedules into providing Balancing Authority's AGC/ACE equation.
Participation Factors	Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions		8/22/2008	11/24/2009		A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, generators are assigned a percentage that they will contribute to serve load.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Peak Demand	Version 0 Reliability Standards		2/8/2005	3/16/2007		1. The highest hourly integrated Net Energy For Load within a Balancing Authority Area occurring within a given period (e.g., day, month, season, or year). 2. The highest instantaneous demand within the Balancing Authority Area.
Performance-Reset Period	Determine Facility Ratings, Operating Limits, and Transfer Capabilities		2/7/2006	3/16/2007		The time period that the entity being assessed must operate without any violations to reset the level of non compliance to zero.
Physical Access Control Systems	Project 2008-06 Cyber Security Order 706	PACS	11/26/2012	11/22/2013	7/1/2016	Cyber Assets that control, alert, or log access to the Physical Security Perimeter(s), exclusive of locally mounted hardware or devices at the Physical Security Perimeter such as motion sensors, electronic lock control mechanisms, and badge readers.
Physical Security Perimeter	Project 2008-06 Cyber Security Order 706	PSP	11/26/2012	11/22/2013	7/1/2016	The physical border surrounding locations in which BES Cyber Assets, BES Cyber Systems, or Electronic Access Control or Monitoring Systems reside, and for which access is controlled.
Planning Assessment	Project 2006-02 Assess Transmission Future Needs and Develop Transmission Plans		8/4/2011	10/17/2013	1/1/2015	Documented evaluation of future Transmission System performance and Corrective Action Plans to remedy identified deficiencies.
Planning Authority	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	The responsible entity that coordinates and integrates transmission Facilities and service plans, resource plans, and Protection Systems.
Planning Coordinator	Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions	PC	8/22/2008	11/24/2009		See Planning Authority.
Point of Delivery	Version 0 Reliability Standards	POD	2/8/2005	3/16/2007		A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction leaves or a Load-Serving Entity receives its energy.
Point of Receipt	Project 2015-04 Alignment of Terms	POR	11/5/2015	1/21/2016	7/1/2016	A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction enters or a generator delivers its output.
Point to Point Transmission Service	Version 0 Reliability Standards	PTP	2/8/2005	3/16/2007		The reservation and transmission of capacity and energy on either a firm or non-firm basis from the Point(s) of Receipt to the Point(s) of Delivery.
Power Transfer Distribution Factor	Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions	PTDF	8/22/2008	11/24/2009		In the pre-contingency configuration of a system under study, a measure of the responsiveness or change in electrical loadings on transmission system Facilities due to a change in electric power transfer from one area to another, expressed in percent (up to 100%) of the change in power transfer
Pre-Reporting Contingency Event ACE Value	Project 2010-14.1 Phase 1		11/5/2015	1/19/2017	1/1/2018	The average value of Reporting ACE, or Reserve Sharing Group Reporting ACE when applicable, in the 16-second interval immediately prior to the start of the Contingency Event Recovery Period based on EMS scan rate data.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Pro Forma Tariff	Version 0 Reliability Standards		2/8/2005	3/16/2007		Usually refers to the standard OATT and/or associated transmission rights mandated by the U.S. Federal Energy Regulatory Commission Order No. 888.
Protected Cyber Assets	Project 2014-02	PCA	2/12/2015	1/21/2016	7/1/2016	One or more Cyber Assets connected using a routable protocol within or on an Electronic Security Perimeter that is not part of the highest impact BES Cyber System within the same Electronic Security Perimeter. The impact rating of Protected Cyber Assets is equal to the highest rated BES Cyber System in the same ESP.
Protection System	Project 2007-17 Protection System Maintenance and Testing		11/19/2010	2/3/2012	4/1/2013	<p>Protection System –</p> <ul style="list-style-type: none"> • Protective relays which respond to electrical quantities, • Communications systems necessary for correct operation of protective functions • Voltage and current sensing devices providing inputs to protective relays, • Station dc supply associated with protective functions (including station batteries, battery chargers, and non-battery-based dc supply), and • Control circuitry associated with protective functions through the trip coil(s) of the circuit breakers or other interrupting devices.
Protection System Maintenance Program (PRC-005-6)	Project 2007-17.4 PRC-005 FERC Order No 803 Directive	PSMP	11/5/2015	12/18/2015	1/1/2016	<p>An ongoing program by which Protection System, Automatic Reclosing, and Sudden Pressure Relaying Components are kept in working order and proper operation of malfunctioning Components is restored. A maintenance program for a specific Component includes one or more of the following activities:</p> <ul style="list-style-type: none"> • Verify — Determine that the Component is functioning correctly. • Monitor — Observe the routine in-service operation of the Component. • Test — Apply signals to a Component to observe functional performance or output behavior, or to diagnose problems. • Inspect — Examine for signs of Component failure, reduced performance or degradation. • Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.
Pseudo-Tie	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	A time-varying energy transfer that is updated in Real-time and included in the Actual Net Interchange term (NIA) in the same manner as a Tie Line in the affected Balancing Authorities' control ACE equations (or alternate control processes).
Purchasing-Selling Entity	Version 0 Reliability Standards	PSE	2/8/2005	3/16/2007		The entity that purchases or sells, and takes title to, energy, capacity, and Interconnected Operations Services. Purchasing-Selling Entities may be affiliated or unaffiliated merchants and may or may not own generating facilities.
Ramp Rate or Ramp	Version 0 Reliability Standards		2/8/2005	3/16/2007		<p>(Schedule) The rate, expressed in megawatts per minute, at which the interchange schedule is attained during the ramp period.</p> <p>(Generator) The rate, expressed in megawatts per minute, that a generator changes its output.</p>
Rated Electrical Operating Conditions	Project 2007-07 Transmission Vegetation Management		2/7/2006	3/16/2007		The specified or reasonably anticipated conditions under which the electrical system or an individual electrical circuit is intend/designed to operate

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Rating	Version 0 Reliability Standards		2/8/2005	3/16/2007		The operational limits of a transmission system element under a set of specified conditions.
Rated System Path Methodology	Project 2006-07 ATC/TTC/ AFC and CBM/TRM Revisions		8/22/2008	11/24/2009		The Rated System Path Methodology is characterized by an initial Total Transfer Capability (TTC), determined via simulation. Capacity Benefit Margin, Transmission Reliability Margin, and Existing Transmission Commitments are subtracted from TTC, and Postbacks and counterflows are added as applicable, to derive Available Transfer Capability. Under the Rated System Path Methodology, TTC results are generally reported as specific transmission path capabilities.
Reactive Power	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	The portion of electricity that establishes and sustains the electric and magnetic fields of alternating-current equipment. Reactive Power must be supplied to most types of magnetic equipment, such as motors and transformers. It also must supply the reactive losses on transmission facilities. Reactive Power is provided by generators, synchronous condensers, or electrostatic equipment such as capacitors and directly influences electric system voltage. It is usually expressed in kilovars (kvar) or megavars (Mvar).
Real Power	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	The portion of electricity that supplies energy to the Load.
Real-time	Coordinate Operations		2/7/2006	3/16/2007		Present time as opposed to future time. (From Interconnection Reliability Operating Limits standard.)
Real-time Assessment	Project 2014-03		11/13/2014	Revised definition. 11/19/2015	1/1/2017	An evaluation of system conditions using Real-time data to assess existing (pre-Contingency) and potential (post-Contingency) operating conditions. The assessment shall reflect applicable inputs including, but not limited to: load, generation output levels, known Protection System and Special Protection System status or degradation, Transmission outages, generator outages, Interchange, Facility Ratings, and identified phase angle and equipment limitations. (Real-time Assessment may be provided through internal systems or through third-party services.)
Receiving Balancing Authority	Version 0 Reliability Standards		2/8/2005	3/16/2007		The Balancing Authority importing the Interchange.
Regional Reliability Organization	Version 0 Reliability Standards	RRO	2/8/2005	3/16/2007		1. An entity that ensures that a defined area of the Bulk Electric System is reliable, adequate and secure. 2. A member of the North American Electric Reliability Council. The Regional Reliability Organization can serve as the Compliance Monitor.
Regional Reliability Plan	Version 0 Reliability Standards		2/8/2005	3/16/2007		The plan that specifies the Reliability Coordinators and Balancing Authorities within the Regional Reliability Organization, and explains how reliability coordination will be accomplished.
Regulating Reserve	Version 0 Reliability Standards		2/8/2005	3/16/2007		An amount of reserve responsive to Automatic Generation Control, which is sufficient to provide normal regulating margin.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Regulation Reserve Sharing Group	Project 2010-14.1 Phase 1		8/15/2013	4/16/2015	7/1/2016	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply the Regulating Reserve required for all member Balancing Authorities to use in meeting applicable regulating standards.
Regulation Service	Version 0 Reliability Standards		2/8/2005	3/16/2007		The process whereby one Balancing Authority contracts to provide corrective response to all or a portion of the ACE of another Balancing Authority. The Balancing Authority providing the response assumes the obligation of meeting all applicable control criteria as specified by NERC for itself and the Balancing Authority for which it is providing the Regulation Service.
Reliability Adjustment Arranged Interchange	Project 2008-12 Coordinate Interchange Standards		2/6/2014	6/30/2014	10/1/2014	A request to modify a Confirmed Interchange or Implemented Interchange for reliability purposes.
Reliability Adjustment RFI	Project 2007-14 Coordinate Interchange - Timing Table		10/29/2008	12/17/2009		Request to modify an Implemented Interchange Schedule for reliability purposes.
Reliability Coordinator	Project 2015-04 Alignment of Terms	RC	11/5/2015	1/21/2016	7/1/2016	The entity that is the highest level of authority who is responsible for the Reliable Operation of the Bulk Electric System, has the Wide Area view of the Bulk Electric System, and has the operating tools, processes and procedures, including the authority to prevent or mitigate emergency operating situations in both next-day analysis and real-time operations. The Reliability Coordinator has the purview that is broad enough to enable the calculation of Interconnection Reliability Operating Limits, which may be based on the operating parameters of transmission systems beyond any Transmission Operator's vision.
Reliability Coordinator Area	Version 0 Reliability Standards		2/8/2005	3/16/2007		The collection of generation, transmission, and loads within the boundaries of the Reliability Coordinator. Its boundary coincides with one or more Balancing Authority Areas.
Reliability Coordinator Information System	Version 0 Reliability Standards	RCIS	2/8/2005	3/16/2007		The system that Reliability Coordinators use to post messages and share operating information in real time.
Reliability Standard	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	A requirement, approved by the United States Federal Energy Regulatory Commission under Section 215 of the Federal Power Act, or approved or recognized by an applicable governmental authority in other jurisdictions, to provide for Reliable Operation of the Bulk-Power System. The term includes requirements for the operation of existing Bulk-Power System facilities, including cybersecurity protection, and the design of planned additions or modifications to such facilities to the extent necessary to provide for Reliable Operation of the Bulk-Power System, but the term does not include any requirement to enlarge such facilities or to construct new transmission capacity or generation capacity.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Reliable Operation	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	Operating the elements of the [Bulk-Power System] within equipment and electric system thermal, voltage, and stability limits so that instability, uncontrolled separation, or cascading failures of such system will not occur as a result of a sudden disturbance, including a cybersecurity incident, or unanticipated failure of system elements.
Remedial Action Scheme	Project 2010-05.2	RAS	11/13/2014	11/19/2015	4/1/2017	<p>A scheme designed to detect predetermined System conditions and automatically take corrective actions that may include, but are not limited to, adjusting or tripping generation (MW and Mvar), tripping load, or reconfiguring a System(s). RAS accomplish objectives such as:</p> <ul style="list-style-type: none"> • Meet requirements identified in the NERC Reliability Standards; • Maintain Bulk Electric System (BES) stability; • Maintain acceptable BES voltages; • Maintain acceptable BES power flows; • Limit the impact of Cascading or extreme events. <p>The following do not individually constitute a RAS:</p> <ol style="list-style-type: none"> a. Protection Systems installed for the purpose of detecting Faults on BES Elements and isolating the faulted Elements b. Schemes for automatic underfrequency load shedding (UFLS) and automatic undervoltage load shedding (UVLS) comprised of only distributed relays c. Out-of-step tripping and power swing blocking d. Automatic reclosing schemes e. Schemes applied on an Element for non-Fault conditions, such as, but not limited to, generator loss-of-field, transformer top-oil temperature, overvoltage, or overload to protect the Element against damage by removing it from service
Remedial Action Scheme <i>Continued</i>	Project 2010-05.2	RAS	11/13/2014	11/19/2015	4/1/2017	<ol style="list-style-type: none"> f. Controllers that switch or regulate one or more of the following: series or shunt reactive devices, flexible alternating current transmission system (FACTS) devices, phase-shifting transformers, variable-frequency transformers, or tap-changing transformers; and, that are located at and monitor quantities solely at the same station as the Element being switched or regulated g. FACTS controllers that remotely switch static shunt reactive devices located at other stations to regulate the output of a single FACTS device h. Schemes or controllers that remotely switch shunt reactors and shunt capacitors for voltage regulation that would otherwise be manually switched i. Schemes that automatically de-energize a line for a non-Fault operation when one end of the line is open j. Schemes that provide anti-islanding protection (e.g., protect load from effects of being isolated with generation that may not be capable of maintaining acceptable frequency and voltage) k. Automatic sequences that proceed when manually initiated solely by a System Operator l. Modulation of HVdc or FACTS via supplementary controls, such as angle damping or frequency damping applied to damp local or inter-area oscillations m. Sub-synchronous resonance (SSR) protection schemes that directly detect sub-synchronous quantities (e.g., currents or torsional oscillations)
Remedial Action Scheme <i>Continued</i>	Project 2010-05.2	RAS	11/13/2014	11/19/2015	4/1/2017	<ol style="list-style-type: none"> n. Generator controls such as, but not limited to, automatic generation control (AGC), generation excitation [e.g. automatic voltage regulation (AVR) and power system stabilizers (PSS)], fast valving, and speed governing

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Removable Media	Project 2014-02		2/12/2015	1/21/2016	7/1/2016	Storage media that (i) are not Cyber Assets, (ii) are capable of transferring executable code, (iii) can be used to store, copy, move, or access data, and (iv) are directly connected for 30 consecutive calendar days or less to a BES Cyber Asset, a network within an ESP, or a Protected Cyber Asset. Examples include, but are not limited to, floppy disks, compact disks, USB flash drives, external hard drives, and other flash memory cards/drives that contain nonvolatile memory.
Reportable Balancing Contingency Event	Project 2010-14.1 Phase 1		11/5/2015	1/19/2017	1/1/2018	<p>Any Balancing Contingency Event occurring within a one-minute interval of an initial sudden decline in ACE based on EMS scan rate data that results in a loss of MW output less than or equal to the Most Severe Single Contingency, and greater than or equal to the lesser amount of: (i) 80% of the Most Severe Single Contingency, or (ii) the amount listed below for the applicable Interconnection. Prior to any given calendar quarter, the 80% threshold may be reduced by the responsible entity upon written notification to the Regional Entity.</p> <ul style="list-style-type: none"> • Eastern Interconnection – 900 MW • Western Interconnection – 500 MW • ERCOT – 800 MW • Quebec – 500 MW
Reportable Cyber Security Incident	Project 2008-06 Cyber Security Order 706 V5 CIP Standards		11/26/2012	11/22/2013	7/1/2016	A Cyber Security Incident that has compromised or disrupted one or more reliability tasks of a functional entity.
Reportable Disturbance	Version 0 Reliability Standards		2/8/2005	3/16/2007		Any event that causes an ACE change greater than or equal to 80% of a Balancing Authority's or reserve sharing group's most severe contingency. The definition of a reportable disturbance is specified by each Regional Reliability Organization. This definition may not be retroactively adjusted in response to observed performance.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Reporting ACE	Project 2010-14.2.1. Phase 2		2/11/2016		7/1/2016	<p>The scan rate values of a Balancing Authority Area's (BAA) Area Control Error (ACE) measured in MW includes the difference between the Balancing Authority Area's Actual Net Interchange and its Scheduled Net Interchange, plus its Frequency Bias Setting obligation, plus correction for any known meter error. In the Western Interconnection, Reporting ACE includes Automatic Time Error Correction (ATEC).</p> <p>Reporting ACE is calculated as follows:</p> $\text{Reporting ACE} = (\text{NI}_A - \text{NI}_S) - 10B (\text{F}_A - \text{F}_S) - I_{ME}$ <p>Reporting ACE is calculated in the Western Interconnection as follows:</p> $\text{Reporting ACE} = (\text{NI}_A - \text{NI}_S) - 10B (\text{F}_A - \text{F}_S) - I_{ME} + I_{ATEC}$ <p>Where:</p> <ul style="list-style-type: none"> • NI_A = Actual Net Interchange. • NI_S = Scheduled Net Interchange. • B = Frequency Bias Setting. • F_A = Actual Frequency. • F_S = Scheduled Frequency. • I_{ME} = Interchange Meter Error. • I_{ATEC} = Automatic Time Error Correction.
Reporting ACE (continued)	Project 2010-14.2.1. Phase 2		2/11/2016		7/1/2016	<p>All NERC Interconnections operate using the principles of Tie-line Bias (TLB) Control and require the use of an ACE equation similar to the Reporting ACE defined above. Any modification(s) to this specified Reporting ACE equation that is(are) implemented for all BAAs on an Interconnection and is(are) consistent with the following four principles of Tie Line Bias control will provide a valid alternative to this Reporting ACE equation:</p> <ol style="list-style-type: none"> 1. All portions of the Interconnection are included in exactly one BAA so that the sum of all BAAs' generation, load, and loss is the same as total Interconnection generation, load, and loss; 2. The algebraic sum of all BAAs' Scheduled Net Interchange is equal to zero at all times and the sum of all BAAs' Actual Net Interchange values is equal to zero at all times; 3. The use of a common Scheduled Frequency F_S for all BAAs at all times; and, 4. Excludes metering or computational errors. (The inclusion and use of the I_{ME} term corrects for known metering or computational errors.)
Request for Interchange	Project 2008-12 Coordinate Interchange	RFI	2/6/2014	6/30/2014	10/1/2014	A collection of data as defined in the NAESB Business Practice Standards submitted for the purpose of implementing bilateral Interchange between Balancing Authorities or an energy transfer within a single Balancing Authority.
Reserve Sharing Group	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating reserves required for each Balancing Authority's use in recovering from contingencies within the group. Scheduling energy from an Adjacent Balancing Authority to aid recovery need not constitute reserve sharing provided the transaction is ramped in over a period the supplying party could reasonably be expected to load generation in (e.g., ten minutes). If the transaction is ramped in quicker (e.g., between zero and ten minutes) then, for the purposes of disturbance control performance, the areas become a Reserve Sharing Group.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Reserve Sharing Group Reporting ACE	Project 2010-14.1 Phase 1		11/5/2015	1/19/2017	1/1/2018	At any given time of measurement for the applicable Reserve Sharing Group (RSG), the algebraic sum of the ACEs (or equivalent as calculated at such time of measurement) of the Balancing Authorities participating in the RSG at the time of measurement.
Resource Planner	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	The entity that develops a long-term (generally one year and beyond) plan for the resource adequacy of specific loads (customer demand and energy requirements) within a Planning Authority area.
Response Rate	Version 0 Reliability Standards		2/8/2005	3/16/2007		The Ramp Rate that a generating unit can achieve under normal operating conditions expressed in megawatts per minute (MW/Min).
Right-of-Way	Project 2010-07	ROW	5/9/2012	3/21/2013	7/1/2014	The corridor of land under a transmission line(s) needed to operate the line(s). The width of the corridor is established by engineering or construction standards as documented in either construction documents, pre-2007 vegetation maintenance records, or by the blowout standard in effect when the line was built. The ROW width in no case exceeds the applicable Transmission Owner's or applicable Generator Owner's legal rights but may be less based on the aforementioned criteria.
Scenario	Coordinate Operations		2/7/2006	3/16/2007		Possible event.
Schedule	Version 0 Reliability Standards		2/8/2005	3/16/2007		(Verb) To set up a plan or arrangement for an Interchange Transaction. (Noun) An Interchange Schedule.
Scheduled Frequency	Version 0 Reliability Standards		2/8/2005	3/16/2007		60.0 Hertz, except during a time correction.
Scheduled Net Interchange (NI_S)	Project 2010-14.2.1 Phase 2		2/11/2016		7/1/2016	The algebraic sum of all scheduled megawatt transfers, including Dynamic Schedules, to and from all Adjacent Balancing Authority areas within the same Interconnection, including the effect of scheduled ramps. Scheduled megawatt transfers on asynchronous DC tie lines directly connected to another Interconnection are excluded from Scheduled Net Interchange.
Scheduling Entity	Version 0 Reliability Standards		2/8/2005	3/16/2007		An entity responsible for approving and implementing Interchange Schedules.
Scheduling Path	Version 0 Reliability Standards		2/8/2005	3/16/2007		The Transmission Service arrangements reserved by the Purchasing-Selling Entity for a Transaction.
Sending Balancing Authority	Version 0 Reliability Standards		2/8/2005	3/16/2007		The Balancing Authority exporting the Interchange.
Sink Balancing Authority	Project 2008-12 Coordinate Interchange Standards		2/6/2014	6/30/2014	10/1/2014	The Balancing Authority in which the load (sink) is located for an Interchange Transaction and any resulting Interchange Schedule.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Source Balancing Authority	Project 2008-12 Coordinate Interchange Standards		2/6/2014	6/30/2014	10/1/2014	The Balancing Authority in which the generation (source) is located for an Interchange Transaction and for any resulting Interchange Schedule.
Special Protection System (Remedial Action Scheme)	Project 2010-05.2	SPS	5/5/2016	6/23/2016	4/1/2017	See "Remedial Action Scheme"
Spinning Reserve	Version 0 Reliability Standards		2/8/2005	3/16/2007		Unloaded generation that is synchronized and ready to serve additional demand.
Stability	Version 0 Reliability Standards		2/8/2005	3/16/2007		The ability of an electric system to maintain a state of equilibrium during normal and abnormal conditions or disturbances.
Stability Limit	Version 0 Reliability Standards		2/8/2005	3/16/2007		The maximum power flow possible through some particular point in the system while maintaining stability in the entire system or the part of the system to which the stability limit refers.
Supervisory Control and Data Acquisition	Version 0 Reliability Standards	SCADA	2/8/2005	3/16/2007		A system of remote control and telemetry used to monitor and control the transmission system.
Supplemental Regulation Service	Version 0 Reliability Standards		2/8/2005	3/16/2007		A method of providing regulation service in which the Balancing Authority providing the regulation service receives a signal representing all or a portion of the other Balancing Authority's ACE.
Surge	Version 0 Reliability Standards		2/8/2005	3/16/2007		A transient variation of current, voltage, or power flow in an electric circuit or across an electric system.
Sustained Outage	Project 2007-07 Transmission Vegetation Management		2/7/2006	3/16/2007		The deenergized condition of a transmission line resulting from a fault or disturbance following an unsuccessful automatic reclosing sequence and/or unsuccessful manual reclosing procedure.
System	Version 0 Reliability Standards		2/8/2005	3/16/2007		A combination of generation, transmission, and distribution components.
System Operating Limit	Project 2015-04 Alignment of Terms	SOL	11/5/2015	1/21/2016	7/1/2016	<p>The value (such as MW, Mvar, amperes, frequency or volts) that satisfies the most limiting of the prescribed operating criteria for a specified system configuration to ensure operation within acceptable reliability criteria. System Operating Limits are based upon certain operating criteria. These include, but are not limited to:</p> <ul style="list-style-type: none"> • Facility Ratings (applicable pre- and post-Contingency Equipment Ratings or Facility Ratings) • transient stability ratings (applicable pre- and post- Contingency stability limits) • voltage stability ratings (applicable pre- and post-Contingency voltage stability) • system voltage limits (applicable pre- and post-Contingency voltage limits)

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
System Operator	Project 2010-01 Training		2/6/2014	6/19/2014	7/1/2016	An individual at a Control Center of a Balancing Authority, Transmission Operator, or Reliability Coordinator, who operates or directs the operation of the Bulk Electric System (BES) in Real-time.
Telemetering	Version 0 Reliability Standards		2/8/2005	3/16/2007		The process by which measurable electrical quantities from substations and generating stations are instantaneously transmitted to the control center, and by which operating commands from the control center are transmitted to the substations and generating stations.
Thermal Rating	Version 0 Reliability Standards		2/8/2005	3/16/2007		The maximum amount of electrical current that a transmission line or electrical facility can conduct over a specified time period before it sustains permanent damage by overheating or before it sags to the point that it violates public safety requirements.
Tie Line	Version 0		2/8/2005	3/16/2007		A circuit connecting two Balancing Authority Areas.
Tie Line Bias	Version 0 Reliability Standards		2/8/2005	3/16/2007		A mode of Automatic Generation Control that allows the Balancing Authority to 1.) maintain its Interchange Schedule and 2.) respond to Interconnection frequency error.
Time Error	Version 0 Reliability Standards		2/8/2005	3/16/2007		The difference between the Interconnection time measured at the Balancing Authority(ies) and the time specified by the National Institute of Standards and Technology. Time error is caused by the accumulation of Frequency Error over a given period.
Time Error Correction	Version 0 Reliability Standards		2/8/2005	3/16/2007		An offset to the Interconnection's scheduled frequency to return the Interconnection's Time Error to a predetermined value.
TLR (Transmission Loading Relief) Log (NERC added the spelled out term for TLR Log for clarification purposes.)	Version 0 Reliability Standards		2/8/2005	3/16/2007		Report required to be filed after every TLR Level 2 or higher in a specified format. The NERC IDC prepares the report for review by the issuing Reliability Coordinator. After approval by the issuing Reliability Coordinator, the report is electronically filed in a public area of the NERC Web site.
Total Flowgate Capability	Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions	TFC	8/22/2008	11/24/2009		The maximum flow capability on a Flowgate, is not to exceed its thermal rating, or in the case of a flowgate used to represent a specific operating constraint (such as a voltage or stability limit), is not to exceed the associated System Operating Limit.
Total Internal Demand	Project 2010-04 Demand Data (MOD C)		5/6/2014	2/19/2015	7/1/2016	The Demand of a metered system, which includes the Firm Demand, plus any controllable and dispatchable DSM Load and the Load due to the energy losses incurred within the boundary of the metered system.
Total Transfer Capability	Version 0 Reliability Standards	TTC	2/8/2005	3/16/2007		The amount of electric power that can be moved or transferred reliably from one area to another area of the interconnected transmission systems by way of all transmission lines (or paths) between those areas under specified system conditions.
Transaction	Version 0 Reliability Standards		2/8/2005	3/16/2007		See Interchange Transaction.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Transfer Capability	Version 0 Reliability Standards		2/8/2005	3/16/2007		The measure of the ability of interconnected electric systems to move or transfer power <i>in a reliable manner</i> from one area to another over all transmission lines (or paths) between those areas under specified system conditions. The units of transfer capability are in terms of electric power, generally expressed in megawatts (MW). The transfer capability from "Area A" to "Area B" is <i>not generally</i> equal to the transfer capability from "Area B" to "Area A."
Transfer Distribution Factor	Version 0 Reliability Standards		2/8/2005	3/16/2007		See Distribution Factor.
Transient Cyber Asset	Project 2014-02		2/12/2015	1/21/2016	7/1/2016	A Cyber Asset that (i) is capable of transmitting or transferring executable code, (ii) is not included in a BES Cyber System, (iii) is not a Protected Cyber Asset (PCA), and (iv) is directly connected (e.g., using Ethernet, serial, Universal Serial Bus, or wireless, including near field or Bluetooth communication) for 30 consecutive calendar days or less to a BES Cyber Asset, a network within an ESP, or a PCA. Examples include, but are not limited to, Cyber Assets used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.
Transmission	Version 0 Reliability Standards		2/8/2005	3/16/2007		An interconnected group of lines and associated equipment for the movement or transfer of electric energy between points of supply and points at which it is transformed for delivery to customers or is delivered to other electric systems.
Transmission Constraint	Version 0 Reliability Standards		2/8/2005	3/16/2007		A limitation on one or more transmission elements that may be reached during normal or contingency system operations.
Transmission Customer	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	1. Any eligible customer (or its designated agent) that can or does execute a Transmission Service agreement or can or does receive Transmission Service. 2. Any of the following entities: Generator Owner, Load-Serving Entity, or Purchasing-Selling Entity.
Transmission Line	Project 2007-07 Transmission Vegetation Management		2/7/2006	3/16/2007		A system of structures, wires, insulators and associated hardware that carry electric energy from one point to another in an electric power system. Lines are operated at relatively high voltages varying from 69 kV up to 765 kV, and are capable of transmitting large quantities of electricity over long distances.
Transmission Operator	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	The entity responsible for the reliability of its "local" transmission system, and that operates or directs the operations of the transmission Facilities.
Transmission Operator Area	Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions		8/22/2008	11/24/2009		The collection of Transmission assets over which the Transmission Operator is responsible for operating.
Transmission Owner	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	The entity that owns and maintains transmission Facilities.

SUBJECT TO ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Transmission Planner	Project 2015-04 Alignment of Terms		11/5/2015	1/21/2016	7/1/2016	The entity that develops a long-term (generally one year and beyond) plan for the reliability (adequacy) of the interconnected bulk electric transmission systems within its portion of the Planning Authority area.
Transmission Reliability Margin	Version 0 Reliability Standards		2/8/2005	3/16/2007		The amount of transmission transfer capability necessary to provide reasonable assurance that the interconnected transmission network will be secure. TRM accounts for the inherent uncertainty in system conditions and the need for operating flexibility to ensure reliable system operation as system conditions change.
Transmission Reliability Margin Implementation Document	Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions		8/22/2008	11/24/2009		A document that describes the implementation of a Transmission Reliability Margin methodology, and provides information related to a Transmission Operator's calculation of TRM.
Transmission Service	Version 0 Reliability Standards		2/8/2005	3/16/2007		Services provided to the Transmission Customer by the Transmission Service Provider to move energy from a Point of Receipt to a Point of Delivery.
Transmission Service Provider	Project 2015-04 Alignment of Terms	TSP	11/5/2015	1/21/2016	7/1/2016	The entity that administers the transmission tariff and provides Transmission Service to Transmission Customers under applicable Transmission Service agreements.
Undervoltage Load Shedding Program	Project 2008-02 Undervoltage Load Shedding & Underfrequency Load Shedding	UVLS Program	11/13/2014	11/19/2015	4/1/2017	An automatic load shedding program, consisting of distributed relays and controls, used to mitigate undervoltage conditions impacting the Bulk Electric System (BES), leading to voltage instability, voltage collapse, or Cascading. Centrally controlled undervoltage-based load shedding is not included.
Vegetation	Project 2007-07 Transmission Vegetation Management		2/7/2006	3/16/2007		All plant material, growing or not, living or dead.
Vegetation Inspection	Project 2010-07		5/9/2012	3/21/2013	7/1/2014	The systematic examination of vegetation conditions on a Right-of-Way and those vegetation conditions under the applicable Transmission Owner's or applicable Generator Owner's control that are likely to pose a hazard to the line(s) prior to the next planned maintenance or inspection. This may be combined with a general line inspection.
Wide Area	Version 0 Reliability Standards		2/8/2005	3/16/2007		The entire Reliability Coordinator Area as well as the critical flow and status information from adjacent Reliability Coordinator Areas as determined by detailed system studies to allow the calculation of Interconnected Reliability Operating Limits.
Year One	Project 2010-10 FAC Order 729		1/24/2011	11/17/2011		The first twelve month period that a Planning Coordinator or a Transmission Planner is responsible for assessing. For an assessment started in a given calendar year, Year One includes the forecasted peak Load period for one of the following two calendar years. For example, if a Planning Assessment was started in 2011, then Year One includes the forecasted peak Load period for either 2012 or 2013.

PENDING ENFORCEMENT						
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Automatic Generation Control	Project 2010-14.2.1. Phase 2	AGC	2/11/2016	9/20/2017	1/1/2019	A process designed and used to adjust a Balancing Authority Areas' Demand and resources to help maintain the Reporting ACE in that of a Balancing Authority Area within the bounds required by applicable NERC Reliability Standards.
Balancing Authority	Project 2010-14.2.1. Phase 2		2/11/2016	9/20/2017	1/1/2019	The responsible entity that integrates resource plans ahead of time, maintains Demand and resource balance within a Balancing Authority Area, and supports Interconnection frequency in real time.
Operational Planning Analysis	Project 2007-06.2 Phase 2 of System Protection Coordination	OPA	8/11/2016			An evaluation of projected system conditions to assess anticipated (pre-Contingency) and potential (post-Contingency) conditions for next-day operations. The evaluation shall reflect applicable inputs including, but not limited to: load forecasts; generation output levels; Interchange; known Protection System and Remedial Action Scheme status or degradation, functions, and limitations; Transmission outages; generator outages; Facility Ratings; and identified phase angle and equipment limitations. (Operational Planning Analysis may be provided through internal systems or through third-party services.)
Protection System Coordination Study	Project 2007-06 System Protection Coordination		11/5/2015			An analysis to determine whether Protection Systems operate in the intended sequence during Faults.
Pseudo-Tie	Project 2010-14.2.1. Phase 2		2/11/2016	9/20/2017	1/1/2019	A time-varying energy transfer that is updated in Real-time and included in the Actual Net Interchange term (NIA) in the same manner as a Tie Line in the affected Balancing Authorities' Reporting ACE equation (or alternate control processes).
Real-time Assessment	Project 2007-06.2 Phase 2 of System Protection Coordination	RTA	8/11/2016			An evaluation of system conditions using Real-time data to assess existing (pre-Contingency) and potential (post-Contingency) operating conditions. The assessment shall reflect applicable inputs including, but not limited to: load; generation output levels; known Protection System and Remedial Action Scheme status or degradation, functions, and limitations; Transmission outages; generator outages; Interchange; Facility Ratings; and identified phase angle and equipment limitations. (Realtime Assessment may be provided through internal systems or through third-party services.)

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Adjacent Balancing Authority	Version 0 Reliability Standards		2/8/2005	3/16/2007		9/30/2014	A Balancing Authority Area that is interconnected another Balancing Authority Area either directly or via a multi-party agreement or transmission tariff.
Adverse Reliability Impact	Project 2006-06		8/4/2011	NERC withdrew the related petition			The impact of an event that results in Bulk Electric System instability or Cascading.
Area Control Error	Version 0 Reliability Standards	ACE	2/8/2005	3/16/2007		3/31/2014	The instantaneous difference between a Balancing Authority's net actual and scheduled interchange, taking into account the effects of Frequency Bias and correction for meter error.
Arranged Interchange	Coordinate Interchange		5/2/2006	3/16/2007		9/30/2014	The state where the Interchange Authority has received the Interchange information (initial or revised).
ATC Path	Project 2006-07		8/22/2008	Not approved; Modification directed			Any combination of Point of Receipt and Point of Delivery for which ATC is calculated; and any Posted Path. (See 18 CFR 37.6(b)(1))
Available Transfer Capability	Version 0 Reliability Standards	ATC	2/8/2005	3/16/2007			A measure of the transfer capability remaining in the physical transmission network for further commercial activity over and above already committed uses. It is defined as Total Transfer Capability less existing transmission commitments (including retail customer service), less a Capacity Benefit Margin, less a Transmission Reliability Margin.
BES Cyber Asset	Project 2008-06		11/26/2012	11/22/2013		6/30/2016	A Cyber Asset that if rendered unavailable, degraded, or misused would, within 15 minutes of its required operation, misoperation, or non-operation, adversely impact one or more Facilities, systems, or equipment, which, if destroyed, degraded, or otherwise rendered unavailable when needed, would affect the reliable operation of the Bulk Electric System. Redundancy of affected Facilities, systems, and equipment shall not be considered when determining adverse impact. Each BES Cyber Asset is included in one or more BES Cyber Systems. (A Cyber Asset is not a BES Cyber Asset if, for 30 consecutive calendar days or less, it is directly connected to a network within an ESP, a Cyber Asset within an ESP, or to a BES Cyber Asset, and it is used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.)
Blackstart Capability Plan	Version 0 Reliability Standards		2/8/2005	3/16/2007	7/1/2013 Will be retired when EOP-005-2 becomes enforceable		A documented procedure for a generating unit or station to go from a shutdown condition to an operating condition delivering electric power without assistance from the electric system. This procedure is only a portion of an overall system restoration plan.
Blackstart Resource	Project 2006-03		8/5/2009	3/17/2011		6/30/2016	A generating unit(s) and its associated set of equipment which has the ability to be started without support from the System or is designed to remain energized without connection to the remainder of the System, with the ability to energize a bus, meeting the Transmission Operator's restoration plan needs for real and reactive power capability, frequency and voltage control, and that has been included in the Transmission Operator's restoration plan.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Bulk Electric System	Version 0 Reliability Standards	BES	2/8/2005	3/16/2007		6/30/2014	As defined by the Regional Reliability Organization, the electrical generation resources, transmission lines, interconnections with neighboring systems, and associated equipment, generally operated at voltages of 100 kV or higher. Radial transmission facilities serving only load with one transmission source are generally not included in this definition.
Bulk Electric System (FERC issued an order on April 18, 2013 approving the revised definition with an effective date of July 1, 2013. On June 14, 2013, FERC granted NERC's request to extend the effective date of the revised definition of the Bulk Electric System to July 1, 2014.)	Project 2010-17	BES	1/18/2012	6/14/2013	Replaced by BES definition FERC approved 3/20/2014		Unless modified by the lists shown below, all Transmission Elements operated at 100 kV or higher and Real Power and Reactive Power resources connected at 100 kV or higher. This does not include facilities used in the local distribution of electric energy. Inclusions: <ul style="list-style-type: none">• I1 - Transformers with the primary terminal and at least one secondary terminal operated at 100 kV or higher unless excluded under Exclusion E1 or E3.• I2 - Generating resource(s) with gross individual nameplate rating greater than 20 MVA or gross plant/facility aggregate nameplate rating greater than 75 MVA including the generator terminals through the high-side of the step-up transformer(s) connected at a voltage of 100 kV or above.• I3 - Blackstart Resources identified in the Transmission Operator's restoration plan.• I4 - Dispersed power producing resources with aggregate capacity greater than 75 MVA (gross aggregate nameplate rating) utilizing a system designed primarily for aggregating capacity, connected at a common point at a voltage of 100 kV or above.
Bulk Electric System (Continued)	Project 2010-17	BES	1/18/2012	6/14/2013	Replaced by BES definition FERC approved 3/20/2014		I5 –Static or dynamic devices (excluding generators) dedicated to supplying or absorbing Reactive Power that are connected at 100 kV or higher, or through a dedicated transformer with a high-side voltage of 100 kV or higher, or through a transformer that is designated in Inclusion I1. Exclusions: <ul style="list-style-type: none">• E1 - Radial systems: A group of contiguous transmission Elements that emanates from a single point of connection of 100 kV or higher and:<ol style="list-style-type: none">Only serves Load. Or,Only includes generation resources, not identified in Inclusion I3, with an aggregate capacity less than or equal to 75 MVA (gross nameplate rating). Or,Where the radial system serves Load and includes generation resources, not identified in Inclusion I3, with an aggregate capacity of non-retail generation less than or equal to 75 MVA (gross nameplate rating). Note – A normally open switching device between radial systems, as depicted on prints or one-line diagrams for example, does not affect this exclusion.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Bulk Electric System (Continued)	Project 2010-17	BES	1/18/2012	6/14/2013		Replaced by BES definition FERC approved 3/20/2014	<ul style="list-style-type: none"> • E2 - A generating unit or multiple generating units on the customer's side of the retail meter that serve all or part of the retail Load with electric energy if: (i) the net capacity provided to the BES does not exceed 75 MVA, and (ii) standby, back-up, and maintenance power services are provided to the generating unit or multiple generating units or to the retail Load by a Balancing Authority, or provided pursuant to a binding obligation with a Generator Owner or Generator Operator, or under terms approved by the applicable regulatory authority. • E3 - Local networks (LN): A group of contiguous transmission Elements operated at or above 100 kV but less than 300 kV that distribute power to Load rather than transfer bulk power across the interconnected system. LN's emanate from multiple points of connection at 100 kV or higher to improve the level of service to retail customer Load and not to accommodate bulk power transfer across the interconnected system. The LN is characterized by all of the following:
Bulk Electric System (Continued)	Project 2010-17	BES	1/18/2012	6/14/2013		Replaced by BES definition FERC approved 3/20/2014	<p>a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusion I3 and do not have an aggregate capacity of non-retail generation greater than 75 MVA (gross nameplate rating);</p> <p>b) Power flows only into the LN and the LN does not transfer energy originating outside the LN for delivery through the LN; and</p> <p>c) Not part of a Flowgate or transfer path: The LN does not contain a monitored Facility of a permanent Flowgate in the Eastern Interconnection, a major transfer path within the Western Interconnection, or a comparable monitored Facility in the ERCOT or Quebec Interconnections, and is not a monitored Facility included in an Interconnection Reliability Operating Limit (IROL).</p> <ul style="list-style-type: none"> • E4 – Reactive Power devices owned and operated by the retail customer solely for its own use. Note - Elements may be included or excluded on a case-by-case basis through the Rules of Procedure exception process.
Bulk-Power System	Project 2012-08.1 Phase 1		5/9/2013	7/9/2013		6/30/2016	A) facilities and control systems necessary for operating an interconnected electric energy transmission network (or any portion thereof); and (B) electric energy from generation facilities needed to maintain transmission system reliability. The term does not include facilities used in the local distribution of electric energy.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Business Practices	Project 2006-07		8/22/2008	Not approved; Modification directed 11/24/2009			Those business rules contained in the Transmission Service Provider's applicable tariff, rules, or procedures; associated Regional Reliability Organization or regional entity business practices; or NAESB Business Practices.
Cascading	Version 0 Reliability Standards		2/8/2005	3/16/2007		6/30/2016	The uncontrolled successive loss of system elements triggered by an incident at any location. Cascading results in widespread electric service interruption that cannot be restrained from sequentially spreading beyond an area predetermined by studies.
Cascading Outages	Determine Facility Ratings, Operating Limits, and Transfer Capabilities		11/1/2006 Withdrawn 2/12/2008		FERC Remanded 12/27/2007		The uncontrolled successive loss of Bulk Electric System Facilities triggered by an incident (or condition) at any location resulting in the interruption of electric service that cannot be restrained from spreading beyond a pre-determined area.
Confirmed Interchange	Coordinate Interchange		5/2/2006	3/16/2007			The state where the Interchange Authority has verified the Arranged Interchange.
Contingency Reserve	Version 0 Reliability Standards		2/8/2005	3/16/2007		12/31/2017	The provision of capacity deployed by the Balancing Authority to meet the Disturbance Control Standard (DCS) and other NERC and Regional Reliability Organization contingency requirements.
Critical Assets	Cyber Security (Permanent)		5/2/2006	1/18/2008		6/30/2016	Facilities, systems, and equipment which, if destroyed, degraded, or otherwise rendered unavailable, would affect the reliability or operability of the Bulk Electric System.
Critical Cyber Assets	Cyber Security (Permanent)		5/2/2006	1/18/2008		6/30/2016	Cyber Assets essential to the reliable operation of Critical Assets.
Cyber Assets	Cyber Security (Permanent)		5/2/2006	1/18/2008		6/30/2016	Programmable electronic devices and communication networks including hardware, software, and data.
Cyber Security Incident	Cyber Security (Permanent)		5/2/2006	1/18/2008		6/30/2016	Any malicious act or suspicious event that: <ul style="list-style-type: none">• Compromises, or was an attempt to compromise, the Electronic Security Perimeter or Physical Security Perimeter of a Critical Cyber Asset, or,• Disrupts, or was an attempt to disrupt, the operation of a Critical Cyber Asset.
Demand-Side Management	Version 0 Reliability Standards	DSM	2/8/2005	3/16/2007		6/30/2016	The term for all activities or programs undertaken by Load-Serving Entity or its customers to influence the amount or timing of electricity they use.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Distribution Provider	Version 0 Reliability Standards		2/8/2005	3/16/2007		6/30/2016	Provides and operates the “wires” between the transmission system and the end-use customer. For those end-use customers who are served at transmission voltages, the Transmission Owner also serves as the Distribution Provider. Thus, the Distribution Provider is not defined by a specific voltage, but rather as performing the Distribution function at any voltage.
Dynamic Interchange Schedule or Dynamic Schedule	Version 0 Reliability Standards		2/8/2005	3/16/2007		9/30/2014	A telemetered reading or value that is updated in real time and used as a schedule in the AGC/ACE equation and the integrated value of which is treated as a schedule for interchange accounting purposes. Commonly used for scheduling jointly owned generation to or from another Balancing Authority Area.
Electronic Security Perimeter	Cyber Security (Permanent)	ESP	5/2/2006	1/18/2008		6/30/2016	The logical border surrounding a network to which Critical Cyber Assets are connected and for which access is controlled.
Element	Version 0 Reliability Standards		2/8/2005	3/16/2007		6/30/2016	Any electrical device with terminals that may be connected to other electrical devices such as a generator, transformer, circuit breaker, bus section, or transmission line. An element may be comprised of one or more components.
Energy Emergency	Version 0 Reliability Standards		2/8/2005	3/16/2007		3/31/2017	A condition when a Load-Serving Entity has exhausted all other options and can no longer provide its customers’ expected energy requirements.
Flowgate	Version 0 Reliability Standards		2/8/2005	3/16/2007			A designated point on the transmission system through which the Interchange Distribution Calculator calculates the power flow from Interchange Transactions.
Frequency Bias Setting	Version 0 Reliability Standards		2/8/2005	3/16/2007		3/31/2015	A value, usually expressed in MW/0.1 Hz, set into a Balancing Authority ACE algorithm that allows the Balancing Authority to contribute its frequency response to the Interconnection.
Generator Operator		GOP	2/8/2005	3/16/2007		6/30/2016	The entity that operates generating unit(s) and performs the functions of supplying energy and Interconnected Operations Services.
Generator Owner		GO	2/8/2005	3/16/2007		6/30/2016	Entity that owns and maintains generating units.
Interchange Authority		IA	5/2/2006	3/16/2007		6/30/2016	The responsible entity that authorizes implementation of valid and balanced Interchange Schedules between Balancing Authority Areas, and ensures communication of Interchange information for reliability assessment purposes.
Interconnected Operations Service	Version 0 Reliability Standards		2/8/2005	3/16/2007			A service (exclusive of basic energy and transmission services) that is required to support the reliable operation of interconnected Bulk Electric Systems.
Interconnection	Version 0 Reliability Standards		2/8/2005	3/16/2007		6/30/2016	When capitalized, any one of the three major electric system networks in North America: Eastern, Western, and ERCOT.
Interconnection	Project 2010-14.1 Phase 1		8/15/2013	4/16/2015			When capitalized, any one of the four major electric system networks in North America: Eastern, Western, ERCOT and Quebec.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Interconnection Reliability Operating Limit	Version 0 Reliability Standards	IROL	2/8/2005	3/16/2007		12/27/2007	The value (such as MW, MVar, Amperes, Frequency or Volts) derived from, or a subset of the System Operating Limits, which if exceeded, could expose a widespread area of the Bulk Electric System to instability, uncontrolled separation(s) or cascading outages.
Intermediate Balancing Authority	Version 0 Reliability Standards		2/8/2005	3/16/2007			A Balancing Authority Area that has connecting facilities in the Scheduling Path between the Sending Balancing Authority Area and Receiving Balancing Authority Area and operating agreements that establish the conditions for the use of such facilities.
Load-Serving Entity	Version 0 Reliability Standards		2/8/2005	3/16/2007			Secures energy and transmission service (and related Interconnected Operations Services) to serve the electrical demand and energy requirements of its end-use customers.
Misoperation	Phase III - IV Planning Standards - Archive		2/7/2006	3/16/2007		6/30/2016	<ul style="list-style-type: none"> • Any failure of a Protection System element to operate within the specified time when a fault or abnormal condition occurs within a zone of protection. • Any operation for a fault not within a zone of protection (other than operation as backup protection for a fault in an adjacent zone that is not cleared within a specified time for the protection for that zone). • Any unintentional Protection System operation when no fault or other abnormal condition has occurred unrelated to on-site maintenance and testing activity.
Operational Planning Analysis	Operate Within Interconnection Reliability Operating Limits		10/17/2008	3/17/2011		9/30/2014	An analysis of the expected system conditions for the next day's operation. (That analysis may be performed either a day ahead or as much as 12 months ahead.) Expected system conditions include things such as load forecast(s), generation output levels, and known system constraints (transmission facility outages, generator outages, equipment limitations, etc.).
Operational Planning Analysis	Project 2008-12		2/6/2014	6/30/2014	10/1/2014	12/31/2016	An analysis of the expected system conditions for the next day's operation. (That analysis may be performed either a day ahead or as much as 12 months ahead.) Expected system conditions include things such as load forecast(s), generation output levels, Interchange, and known system constraints (transmission facility outages, generator outages, equipment limitations, etc.).
Physical Security Perimeter	Cyber Security (Permanent)	PSP	5/2/2006	1/18/2008		6/30/2016	The physical, completely enclosed ("six-wall") border surrounding computer rooms, telecommunications rooms, operations centers, and other locations in which Critical Cyber Assets are housed and for which access is controlled.
Planning Authority	Version 0 Reliability Standards	PA	2/8/2005	3/16/2007			The responsible entity that coordinates and integrates transmission facility and service plans, resource plans, and protection systems.
Point of Receipt	Version 0 Reliability Standards	POR	2/8/2005	3/16/2007		6/30/2016	A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction enters or a Generator delivers its output.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Postback	Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions		8/22/2008	Not approved; Modification directed 11/24/09			Positive adjustments to ATC or AFC as defined in Business Practices. Such Business Practices may include processing of redirects and unscheduled service.
Protected Cyber Assets	Project 2008-06 Cyber Security Order 706	PCA	11/26/2012	11/22/2013		6/30/2016	One or more Cyber Assets connected using a routable protocol within or on an Electronic Security Perimeter that is not part of the highest impact BES Cyber System within the same Electronic Security Perimeter. The impact rating of Protected Cyber Assets is equal to the highest rated BES Cyber System in the same ESP. A Cyber Asset is not a Protected Cyber Asset if, for 30 consecutive calendar days or less, it is connected either to a Cyber Asset within the ESP or to the network within the ESP, and it is used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.
Protection System	Phase III-IV Planning Standards - Archive		2/7/2006	3/17/2007		4/1/2013	Protective relays, associated communication systems, voltage and current sensing devices, station batteries and DC control circuitry.
Protection System Maintenance Program (PRC-005-2)	Project 2007-17 Protection System Maintenance and Testing	PSMP	11/7/2012	12/19/2013		4/1/2015	An ongoing program by which Protection System components are kept in working order and proper operation of malfunctioning components is restored. A maintenance program for a specific component includes one or more of the following activities: Verify — Determine that the component is functioning correctly. Monitor — Observe the routine in-service operation of the component. Test — Apply signals to a component to observe functional performance or output behavior, or to diagnose problems. Inspect — Examine for signs of component failure, reduced performance or degradation. Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Protection System Maintenance Program (PRC-005-3)	Project 2007-17.2 Protection System Maintenance and Testing - Phase 2	PSMP	11/7/2013	1/22/2015	4/1/2016		An ongoing program by which Protection System and automatic reclosing components are kept in working order and proper operation of malfunctioning components is restored. A maintenance program for a specific component includes one or more of the following activities: Verify — Determine that the component is functioning correctly. Monitor — Observe the routine in-service operation of the component. Test — Apply signals to a component to observe functional performance or output behavior, or to diagnose problems. Inspect — Examine for signs of component failure, reduced performance or degradation. Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.
Protection System Maintenance Program (PRC-005-4)	Project 2014-01 Standards Applicability for Dispersed Generation Resources	PSMP	11/13/2014	9/17/2015	1/1/2016		An ongoing program by which Protection System, Automatic Reclosing, and Sudden Pressure Relaying Components are kept in working order and proper operation of malfunctioning Components is restored. A maintenance program for a specific Component includes one or more of the following activities: <ul style="list-style-type: none"> • Verify — Determine that the Component is functioning correctly. • Monitor — Observe the routine in-service operation of the Component. • Test — Apply signals to a Component to observe functional performance or output behavior, or to diagnose problems. • Inspect — Examine for signs of Component failure, reduced performance or degradation. • Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.
Pseudo-Tie	Version 0 Reliability Standards		2/8/2005	3/16/2007			A telemetered reading or value that is updated in real time and used as a "virtual" tie line flow in the AGC/ACE equation but for which no physical tie or energy metering actually exists. The integrated value is used as a metered
Reactive Power	Version 0 Reliability Standards		2/8/2005	3/16/2007		6/30/2016	The portion of electricity that establishes and sustains the electric and magnetic fields of alternating-current equipment. Reactive power must be supplied to most types of magnetic equipment, such as motors and transformers. It also must supply the reactive losses on transmission facilities. Reactive power is provided by generators, synchronous condensers, or electrostatic equipment such as capacitors and directly influences electric system voltage. It is usually expressed in kilovars (kvar) or megavars (Mvar).
Real Power	Version 0 Reliability Standards		2/8/2005	3/16/2007			The portion of electricity that supplies energy to the load.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Reallocation	Version 0 Reliability Standards		2/8/2005	3/16/2007			The total or partial curtailment of Transactions during TLR Level 3a or 5a to allow Transactions using higher priority to be implemented.
Real-time Assessment	Operate Within Interconnection Reliability Operating Limits		10/17/2008	3/17/2011		12/31/2016	An examination of existing and expected system conditions, conducted by collecting and reviewing immediately available data
Reliability Coordinator	Version 0 Reliability Standards	RC	2/8/2005	3/16/2007		6/30/2007	The entity that is the highest level of authority who is responsible for the reliable operation of the Bulk Electric System, has the Wide Area view of the Bulk Electric System, and has the operating tools, processes and procedures, including the authority to prevent or mitigate emergency operating situations in both next-day analysis and real-time operations. The Reliability Coordinator has the purview that is broad enough to enable the calculation of Interconnection Reliability Operating Limits, which may be based on the operating parameters of transmission systems beyond any Transmission Operator's vision.
Reliability Directive	Project 2006-06 Reliability Coordination		8/16/2012	11/19/2015		11/19/2015	A communication initiated by a Reliability Coordinator, Transmission Operator, or Balancing Authority where action by the recipient is necessary to address an Emergency or Adverse Reliability Impact.
Reliability Standard	Project 2012-08.1 Phase 1 of Glossary Updates: Statutory Definitions		5/9/2013	7/9/2013		6/30/2016	A requirement, approved by the United States Federal Energy Regulatory Commission under this Section 215 of the Federal Power Act, or approved or recognized by an applicable governmental authority in other jurisdictions, to provide for reliable operation [Reliable Operation] of the bulk-power system [Bulk-Power System]. The term includes requirements for the operation of existing bulk-power system [Bulk-Power System] facilities, including cybersecurity protection, and the design of planned additions or modifications to such facilities to the extent necessary to provide for reliable operation [Reliable Operation] of the bulk-power system [Bulk-Power System], but the term does not include any requirement to enlarge such facilities or to construct new transmission capacity or generation capacity.
Reliable Operation	Project 2012-08.1 Phase 1 of Glossary Updates: Statutory Definitions		5/9/2013	7/9/2013		6/30/2016	Operating the elements of the bulk-power system [Bulk-Power System] within equipment and electric system thermal, voltage, and stability limits so that instability, uncontrolled separation, or cascading failures of such system will not occur as a result of a sudden disturbance, including a cybersecurity incident, or unanticipated failure of system elements.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Remedial Action Scheme	Version 0 Reliability Standards	RAS	2/8/2005	3/16/2007		3/31/2017	See "Special Protection System"
Reporting Ace			8/15/2013	4/16/2015 (Will not go into effect)			<p>The scan rate values of a Balancing Authority's Area Control Error (ACE) measured in MW, which includes the difference between the Balancing Authority's Net Actual Interchange and its Net Scheduled Interchange, plus its Frequency Bias obligation, plus any known meter error. In the Western Interconnection, Reporting ACE includes Automatic Time Error Correction (ATEC). Reporting ACE is calculated as follows:</p> $\text{Reporting ACE} = (\text{NI}_A - \text{NI}_S) - 10B (F_A - F_S) - I_{ME}$ <p>Reporting ACE is calculated in the Western Interconnection as follows:</p> $\text{Reporting ACE} = (\text{NI}_A - \text{NI}_S) - 10B (F_A - F_S) - I_{ME} + I_{ATEC}$ <p>Where:</p> <p>NI_A (Actual Net Interchange) is the algebraic sum of actual megawatt transfers across all Tie Lines and includes Pseudo-Ties. Balancing Authorities directly connected via asynchronous ties to another Interconnection may include or exclude megawatt transfers on those Tie lines in their actual interchange, provided they are implemented in the same manner for Net Interchange Schedule.</p> <p>NI_S (Scheduled Net Interchange) is the algebraic sum of all scheduled megawatt transfers, including Dynamic Schedules, with adjacent Balancing Authorities, and taking into account the effects of schedule ramps. Balancing Authorities directly connected via asynchronous ties to another Interconnection may include or exclude megawatt transfers on those Tie Lines in their scheduled Interchange, provided they are implemented in the same manner for Net Interchange Actual.</p>
Reporting Ace (Continued)			8/15/2013	4/16/2015 (Will not go into effect)			<p>B (Frequency Bias Setting) is the Frequency Bias Setting (in negative MW/0.1 Hz) for the Balancing Authority.</p> <p>10 is the constant factor that converts the frequency bias setting units to MW/Hz.</p> <p>F_A (Actual Frequency) is the measured frequency in Hz.</p> <p>F_S (Scheduled Frequency) is 60.0 Hz, except during a time correction.</p> <p>I_{ME} (Interchange Meter Error) is the meter error correction factor and represents the difference between the integrated hourly average of the net interchange actual (NIA) and the cumulative hourly net Interchange energy measurement (in megawatt-hours).</p> <p>I_{ATEC} (Automatic Time Error Correction) is the addition of a component to the ACE equation for the Western Interconnection that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error. Automatic Time Error Correction is only applicable in the Western Interconnection.</p> <p>ATEC shall be zero when operating in Automatic Time Error Correction control mode.</p> $I_{ATEC} = \frac{PH}{(1-Y)^{1/H}}$ <ul style="list-style-type: none"> • Y = B / BS. • H = Number of hours used to payback Primary Inadvertent Interchange energy. The value of H is set to 3.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Reporting Ace (Continued)							<p>energy. The value of α is set to 3.</p> <p>B_S = Frequency Bias for the Interconnection (MW / 0.1 Hz).</p> <ul style="list-style-type: none"> • Primary Inadvertent Interchange (PII_{hourly}) is $(1-Y) * (II_{actual} - B * \Delta TE/6)$ • II_{actual} is the hourly Inadvertent Interchange for the last hour. • ΔTE is the hourly change in system Time Error as distributed by the Interconnection Time Monitor. Where: $\Delta TE = TE_{end\ hour} - TE_{begin\ hour} - TD_{adj} - (t) * (TE_{offset})$ • TD_{adj} is the Reliability Coordinator adjustment for differences with Interconnection Time Monitor control center clocks. • t is the number of minutes of Manual Time Error Correction that occurred during the hour. • TE_{offset} is 0.000 or +0.020 or -0.020. • PII_{accum} is the Balancing Authority's accumulated PII_{hourly} in MWh. An On-Peak and Off-Peak accumulation accounting is required. <p>Where:</p> $PII_{accum}^{on/off\ peak} = \text{last period's } PII_{accum}^{on/off\ peak} + PII_{hourly}$ <p>All NERC Interconnections with multiple Balancing Authorities operate using the principles of Tie-line Bias (TLB) Control and require the use of an ACE equation similar to the Reporting ACE defined above. Any modification(s) to this specified Reporting ACE equation that is(are) implemented for all Balancing Authorities on an interconnection and is(are) consistent with the following four principles will provide a valid alternative Reporting ACE equation consistent with the measures included in this standard.</p> <ol style="list-style-type: none"> 1. All portions of the Interconnection are included in one area or another so that the sum of all area generation, loads and losses is the same as total system generation, load and losses. 2. The algebraic sum of all area Net Interchange Schedules and all Net Interchange actual values is equal to zero at all times. 3. The use of a common Scheduled Frequency FS for all areas at all times. 4. The absence of metering or computational errors. (The inclusion and use of the IME term to account for known metering or computational errors.)
Reporting Ace (Continued)			8/15/2013	4/16/2015 (Will not go into effect)			
Request for Interchange	Coordinate Interchange	RFI	5/2/2006	3/16/2007			A collection of data as defined in the NAESB RFI Datasheet, to be submitted to the Interchange Authority for the purpose of implementing bilateral Interchange between a Source and Sink Balancing Authority.
Reserve Sharing Group	Version 0 Reliability Standards	RSG	2/8/2005	3/16/2007		6/30/2016	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating reserves required for each Balancing Authority's use in recovering from contingencies within the group. Scheduling energy from an Adjacent Balancing Authority to aid recovery need not constitute reserve sharing provided the transaction is ramped in over a period the supplying party could reasonably be expected to load generation in (e.g., ten minutes). If the transaction is ramped in quicker (e.g., between zero and ten minutes) then, for the purposes of Disturbance Control Performance, the Areas become a Reserve Sharing Group.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Reserve Sharing Group Reporting ACE	Project 2010-14.1 Phase 1		8/15/2013	4/16/2015		12/31/2017	At any given time of measurement for the applicable Reserve Sharing Group, the algebraic sum of the Reporting ACEs (or equivalent as calculated at such time of measurement) of the Balancing Authorities participating in the Reserve Sharing Group at the time of measurement.
Resource Planner	Version 0 Reliability Standards	RP	2/8/2005	3/16/2007			The entity that develops a long-term (generally one year and beyond) plan for the resource adequacy of specific loads (customer demand and energy requirements) within a Planning Authority Area.
Right-of-Way	Project 2007-07	ROW	2/7/2006	3/16/2007			A corridor of land on which electric lines may be located. The Transmission Owner may own the land in fee, own an easement, or have certain franchise, prescription, or license rights to construct and maintain lines.
Right-of-Way	Project 2007-07	ROW	11/3/2011	3/21/2013		6/30/2014	The corridor of land under a transmission line(s) needed to operate the line(s). The width of the corridor is established by engineering or construction standards as documented in either construction documents, pre-2007 vegetation maintenance records, or by the blowout standard in effect when the line was built. The ROW width in no case exceeds the Transmission Owner's legal rights but may be less based on the aforementioned criteria.
Sink Balancing Authority	Version 0 Reliability Standards		2/8/2005	3/16/2007		9/30/2014	The Balancing Authority in which the load (sink) is located for an Interchange Transaction. (This will also be a Receiving Balancing Authority for the resulting Interchange Schedule.)
Source Balancing Authority	Version 0 Reliability Standards		2/8/2005	3/16/2007		9/30/2014	The Balancing Authority in which the generation (source) is located for an Interchange Transaction. (This will also be a Sending Balancing Authority for the resulting Interchange Schedule.)
Special Protection System (Remedial Action Scheme)	Version 0 Reliability Standards	SPS	2/8/2005	3/16/2007 (Becomes inactive 3/31/2017)		3/31/2017	An automatic protection system designed to detect abnormal or predetermined system conditions, and take corrective actions other than and/or in addition to the isolation of faulted components to maintain system reliability. Such action may include changes in demand, generation (MW and Mvar), or system configuration to maintain system stability, acceptable voltage, or power flows. An SPS does not include (a) underfrequency or undervoltage load shedding or (b) fault conditions that must be isolated or (c) out-of-step relaying (not designed as an integral part of an SPS). Also called Remedial Action Scheme.

Retired Terms							
Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
System Operating Limit	Version 0 Reliability Standards	SOL	2/8/2005	3/16/2007		6/30/2014	<p>The value (such as MW, MVar, Amperes, Frequency or Volts) that satisfies the most limiting of the prescribed operating criteria for a specified system configuration to ensure operation within acceptable reliability criteria. System Operating Limits are based upon certain operating criteria. These include, but are not limited to:</p> <ul style="list-style-type: none"> • Facility Ratings (Applicable pre- and post-Contingency equipment or facility ratings) • Transient Stability Ratings (Applicable pre- and post-Contingency Stability Limits) • Voltage Stability Ratings (Applicable pre- and post-Contingency Voltage Stability) • System Voltage Limits (Applicable pre- and post-Contingency Voltage Limits)
System Operator	Version 0 Reliability Standards		2/8/2005	3/16/2007		6/30/2016	An individual at a control center (Balancing Authority, Transmission Operator, Generator Operator, Reliability Coordinator) whose responsibility it is to monitor and control that electric system in real time.
Transmission Customer	Version 0 Reliability Standards		2/8/2005	3/16/2007			<ol style="list-style-type: none"> 1. Any eligible customer (or its designated agent) that can or does execute a transmission service agreement or can or does receive transmission service. 2. Any of the following responsible entities: Generator Owner, Load-Serving Entity, or Purchasing-Selling Entity.
Transmission Operator	Version 0 Reliability Standards	TOP	2/8/2005	3/16/2007			The entity responsible for the reliability of its “local” transmission system, and that operates or directs the operations of the transmission facilities.
Transmission Owner	Version 0 Reliability Standards	TO	2/8/2005	3/16/2007			The entity that owns and maintains transmission facilities.
Transmission Planner	Version 0 Reliability Standards	TP	2/8/2005	3/16/2007			The entity that develops a long-term (generally one year and beyond) plan for the reliability (adequacy) of the interconnected bulk electric transmission systems within its portion of the Planning Authority Area.
Transmission Service Provider	Version 0 Reliability Standards	TSP	2/8/2005	3/16/2007			The entity that administers the transmission tariff and provides Transmission Service to Transmission Customers under applicable transmission service agreements.
Vegetation Inspection	Transmission Vegetation		2/7/2006	3/16/2007		3/20/2013	The systematic examination of a transmission corridor to document vegetation conditions.
Vegetation Inspection	Project 2007-07 Transmission Vegetation Management		11/3/2011	3/21/2013		6/30/2014	The systematic examination of vegetation conditions on a Right-of-Way and those vegetation conditions under the Transmission Owner’s control that are likely to pose a hazard to the line(s) prior to the next planned maintenance or inspection. This may be combined with a general line inspection.

NPCC REGIONAL DEFINITIONS							
NPCC Regional Term	Link to Implementation Plan	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Current Zero Time	PRC-002-NPCC-1 Implementation Plan		11/4/2010	10/20/2011	10/20/2013		The time of the final current zero on the last phase to interrupt.
Generating Plant	PRC-002-NPCC-1 Implementation Plan		11/4/2010	10/20/2011	10/20/2013		One or more generators at a single physical location whereby any single contingency can affect all the generators at that location.

RELIABILITYFIRST REGIONAL DEFINITIONS							
RELIABILITYFIRST Regional Term	Link to FERC Order	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Resource Adequacy	BAL-502-RFC-02 Implementation Plan		8/5/2009	3/17/2011			The ability of supply-side and demand-side resources to meet the aggregate electrical demand (including losses)
Net Internal Demand	BAL-502-RFC-02 Implementation Plan		8/5/2009	3/17/2011			Total of all end-use customer demand and electric system losses within specified metered boundaries, less Direct Control Management and Interruptible Demand
Peak Period	BAL-502-RFC-02 Implementation Plan		8/5/2009	3/17/2011			A period consisting of two (2) or more calendar months but less than seven (7) calendar months, which includes the period during which the responsible entity's annual peak demand is expected to occur
Wind Generating Station	BAL-502-RFC-02 Implementation Plan		11/3/2011 (Board withdrew approval 11/7/2012)	3/17/2011			A collection of wind turbines electrically connected together and injecting energy into the grid at one point, sometimes known as a "Wind Farm."
Year One	BAL-502-RFC-02 Implementation Plan		8/5/2009	3/17/2011			The planning year that begins with the upcoming annual Peak Period

TEXAS RE REGIONAL DEFINITIONS						
Frequency Measurable Event	BAL-001-TRE-1 Implementation Plan	FME	8/15/2013	1/16/2014	4/1/2014	<p>An event that results in a Frequency Deviation, identified at the BA's sole discretion, and meeting one of the following conditions:</p> <p>i) a Frequency Deviation that has a pre-perturbation [the 16-second period of time before t(0)] average frequency to post-perturbation [the 32-second period of time starting 20 seconds after t(0)] average frequency absolute deviation greater than 100 mHz (the 100 mHz value may be adjusted by the BA to capture 30 to 40 events per year).</p> <p>Or</p> <p>ii) a cumulative change in generating unit/generating facility, DC tie and/or firm load pre-perturbation megawatt value to post-perturbation megawatt value absolute deviation greater than 550 MW (the 550 MW value may be adjusted by the BA to capture 30 to 40 events per year).</p>
Governor			8/15/2013	1/16/2014	4/1/2014	The electronic, digital or mechanical device that implements Primary Frequency Response of generating units/generating facilities or other system elements.
Primary Frequency Response	BAL-001-TRE-1 Implementation Plan	PFR	8/15/2013	1/16/2014	4/1/2014	The immediate proportional increase or decrease in real power output provided by generating units/generating facilities and the natural real power dampening response provided by Load in response to system Frequency Deviations. This response is in the direction that stabilizes frequency.

WECC REGIONAL DEFINITIONS							
WECC Regional Term	WECC Standards Under Development	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Area Control Error *	WECC Regional Standards Under Development	ACE	3/12/2007	6/8/2007		3/31/2014	Means the instantaneous difference between net actual and scheduled interchange, taking into account the effects of Frequency Bias including correction for meter error.
Automatic Generation Control *	WECC Regional Standards Under Development	AGC	3/12/2007	6/8/2007			Means equipment that automatically adjusts a Control Area's generation from a central location to maintain its interchange schedule plus Frequency Bias.
Automatic Time Error Correction	WECC Regional Standards Under Development		3/26/2008	5/21/2009		3/31/2014	A frequency control automatic action that a Balancing Authority uses to offset its frequency contribution to support the Interconnection's scheduled frequency.
Automatic Time Error Correction	WECC Regional Standards Under Development		12/19/2012	10/16/2013	4/1/2014		The addition of a component to the ACE equation that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error.

<u>Average Generation</u> *	WECC Regional Standards Under Development		3/12/2007	6/8/2007			Means the total MWh generated within the Balancing Authority Operator's Balancing Authority Area during the prior year divided by 8760 hours (8784 hours if the prior year had 366 days).
<u>Business Day</u> *	WECC Regional Standards Under Development		3/12/2007	6/8/2007			Means any day other than Saturday, Sunday, or a legal public holiday as designated in section 6103 of title 5, U.S. Code.
Commercial Operation	WECC Regional Standards Under Development		10/29/2008	4/21/2011			Achievement of this designation indicates that the Generator Operator or Transmission Operator of the synchronous generator or synchronous condenser has received all approvals necessary for operation after completion of initial start-up testing.
Contributing Schedule	WECC Regional Standards Under Development		2/10/2009	3/17/2011			A Schedule not on the Qualified Transfer Path between a Source Balancing Authority and a Sink Balancing Authority that contributes unscheduled flow across the Qualified Transfer Path.
Dependability-Based Misoperation	WECC Regional Standards Under Development		10/29/2008	4/21/2011			Is the absence of a Protection System or RAS operation when intended. Dependability is a component of reliability and is the measure of a device's certainty to operate when required.
<u>Disturbance</u> *	WECC Regional Standards Under Development		3/12/2007	6/8/2007		Retired	Means (i) any perturbation to the electric system, or (ii) the unexpected change in ACE that is caused by the sudden loss of generation or interruption of load.
<u>Extraordinary Contingency</u> †	WECC Regional Standards Under Development		3/12/2007	6/8/2007			Shall have the meaning set out in Excuse of Performance, section B.4.c. language in section B.4.c: <i>means any act of God, actions by a non-affiliated third party, labor disturbance, act of the public enemy, war, insurrection, riot, fire, storm or flood, earthquake, explosion, accident to or breakage, failure or malfunction of machinery or equipment, or any other cause beyond the Reliability Entity's reasonable control; provided that prudent industry standards (e.g. maintenance, design, operation) have been employed; and provided further that no act or cause shall be considered an Extraordinary Contingency if such act or cause results in any contingency contemplated in any WECC Reliability Standard (e.g., the "Most Severe Single Contingency" as defined in the WECC Reliability Criteria or any lesser contingency).</i>

WECC REGIONAL DEFINITIONS							
WECC Regional Term	WECC Standards Under Development	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
<u>Frequency Bias</u> *	WECC Regional Standards Under Development		3/12/2007	6/8/2007			Means a value, usually given in megawatts per 0.1 Hertz, associated with a Control Area that relates the difference between scheduled and actual frequency to the amount of generation required to correct the difference.

Functionally Equivalent Protection System	WECC Regional Standards Under Development	FEPS	10/29/2008	4/21/2011			A Protection System that provides performance as follows: <ul style="list-style-type: none">• Each Protection System can detect the same faults within the zone of protection and provide the clearing times and coordination needed to comply with all Reliability Standards.• Each Protection System may have different components and operating characteristics.
Functionally Equivalent RAS	WECC Regional Standards Under Development	FERAS	10/29/2008	4/21/2011			A Remedial Action Scheme ("RAS") that provides the same performance as follows: <ul style="list-style-type: none">• Each RAS can detect the same conditions and provide mitigation to comply with all Reliability Standards.• Each RAS may have different components and operating characteristics.
Generating Unit Capability *	WECC Regional Standards Under Development		3/12/2007	6/8/2007			Means the MVA nameplate rating of a generator.
Non-spinning Reserve	WECC Regional Standards Under Development		3/12/2007	6/8/2007		Retired	Means that Operating Reserve not connected to the system but capable of serving demand within a specified time, or interruptible load that can be removed from the system in a specified time.
Normal Path Rating *	WECC Regional Standards Under Development		3/12/2007	6/8/2007			Is the maximum path rating in MW that has been demonstrated to WECC through study results or actual operation, whichever is greater. For a path with transfer capability limits that vary seasonally, it is the maximum of all the seasonal values.
Operating Reserve *	WECC Regional Standards Under Development		3/12/2007	6/8/2007			Means that capability above firm system demand required to provide for regulation, load-forecasting error, equipment forced and scheduled outages and local area protection. Operating Reserve consists of Spinning Reserve and Nonspinning Reserve.
Operating Transfer Capability Limit *	WECC Regional Standards Under Development	OTC	3/12/2007	6/8/2007			Means the maximum value of the most critical system operating parameter(s) which meets: (a) precontingency criteria as determined by equipment loading capability and acceptable voltage conditions, (b) transient criteria as determined by equipment loading capability and acceptable voltage conditions, (c) transient performance criteria, and (d) post-contingency loading and voltage criteria.
Primary Inadvertent Interchange	WECC Regional Standards Under Development		3/26/2008	5/21/2009			The component of area (n) inadvertent interchange caused by the regulating deficiencies of the area (n).
Qualified Controllable Device	WECC Regional Standards Under Development		2/10/2009	3/17/2011			A controllable device installed in the Interconnection for controlling energy flow and the WECC Operating Committee has approved using the device for controlling the USF on the Qualified Transfer Paths.
Qualified Transfer Path	WECC Regional Standards Under Development		2/10/2009	3/17/2011			A transfer path designated by the WECC Operating Committee as being qualified for WECC unscheduled flow mitigation.
Qualified Transfer Path Curtailment Event	WECC Regional Standards Under Development		2/10/2009	3/17/2011			Each hour that a Transmission Operator calls for Step 4 or higher for one or more consecutive hours (See Attachment 1 IRO-006-WECC-1) during which the curtailment tool is functional.

WECC Regional Term	WECC Standards Under Development	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Relief Requirement	WECC Regional Standards Under Development		2/10/2009	3/17/2011		6/30/2014	The expected amount of the unscheduled flow reduction on the Qualified Transfer Path that would result by curtailing each Sink Balancing Authority's Contributing Schedules by the percentages listed in the columns of WECC Unscheduled Flow Mitigation Summary of Actions Table in Attachment 1 WECC IRO-006-WECC-1.
Relief Requirement	WECC Regional Standards Under Development		2/7/2013	6/13/2014	7/1/2014		The expected amount of the unscheduled flow reduction on the Qualified Transfer Path that would result by curtailing each Sink Balancing Authority's Contributing Schedules by the percentages determined in the WECC unscheduled flow mitigation guideline.
Secondary Inadvertent Interchange	WECC Regional Standards Under Development		3/26/2008	5/21/2009			The component of area (n) inadvertent interchange caused by the regulating deficiencies of area (i).
Security-Based Misoperation	WECC Regional Standards Under Development		10/29/2008	4/21/2011			A Misoperation caused by the incorrect operation of a Protection System or RAS. Security is a component of reliability and is the measure of a device's certainty not to operate falsely.
Spinning Reserve	WECC Regional Standards Under Development		3/12/2007	6/8/2007		Retired	Means unloaded generation which is synchronized and ready to serve additional demand. It consists of Regulating reserve and Contingency reserve (as each are described in Sections B.a.i and ii).
Transfer Distribution Factor	WECC Regional Standards Under Development	TDF	2/10/2009	3/17/2011			The percentage of USF that flows across a Qualified Transfer Path when an Interchange Transaction (Contributing Schedule) is implemented. [See the WECC Unscheduled Flow Mitigation Summary of Actions Table (Attachment 1 WECC IRO-006-WECC-1).]
WECC Table 2 *	WECC Regional Standards Under Development		3/12/2007	6/8/2007			Means the table maintained by the WECC identifying those transfer paths monitored by the WECC regional Reliability coordinators. As of the date set out therein, the transmission paths identified in Table 2 are as listed in Attachment A to this Standard.

¹ FERC approved the WECC Tier One Reliability Standards in the Order Approving Regional Reliability Standards for the Western Interconnection and Directing Modifications, 119 FERC ¶ 61,260 (June 8, 2007). In that Order, FERC directed WECC to address the inconsistencies between the regional definitions and the NERC Glossary in developing permanent replacement standards. The replacement standards designed to address the shortcomings were filed with FERC in 2009.

CHANGE HISTORY

Date	Action
1/31/2018	Fixed truncated definition for Texas RE term Primary Frequency Response
1/2/2018	Moved to Subject to Enforcement: Balancing Contingency Event; Contingency Event Recovery Period; Contingency Reserve; Contingency Reserve Restoration Period; Most Severe Single Contingency; Pre-Reporting Contingency Event ACE Value; Reportable Balancing Contingency Event; Reserve Sharing Group Reporting ACE Moved to Retired tab: Contingency Reserve; Reserve Sharing Group Reporting ACE
10/6/2017	Added the Effective date of Automatic Generation Control, Pseudo-Tie and Balancing Authority
8/1/2017	Moved to Subject to Enforcement: Reporting Ace, Actual Frequency, Actual Net Interchange, Schedule Net Interchange, Interchange Meter Error, Automatic Time Error Correction
7/24/2017	Updated project link for definitions related to Project 2014-02, board adopted 2/12/15.
7/14/2017	Updated project link to Remedial Action Scheme with an effective date of 4/1/17; Removeable Media link to project 2014-02.
7/3/2017	Moved 'Geomagnetic Disturbance Vulnerability Assessment or GMD Vulnerability Assessment' to Subject to Enforcement
6/15/2017	Readded 'Governor' and 'Primary Frequency Response' to TexasRE
4/4/2017	Moved to Subject to Enforcement: Energy Emergency, Remedial Action Scheme, Special Protection System and Under3 Voltage Load Shedding Program. Moved terms inactive 3/31/17 to Retired tab.
3/16/2017	Removed Pending Inactive tab; not necessary
3/10/2017	Added Pending Inactive tab
2/7/2017	Added Effective Dates for: Balancing Contingency Event, Most Severe Single Contingency (MSSC), Reportable Balancing Contingency Event, Contingency Event Recovery Period, Contingency Reserve Restoration Period, Pre-Reporting Contingency Event ACE Value, Reserve Sharing Group Reporting ACE, Contingency Reserve
1/25/2017	Removed WECC terms 'Non-Spinning Reserve' and 'Spinning Reserve' per FERC Order No. 789. Docket No. RM13-13-000.
1/6/2017	Moved the following terms from Pending Enforcement to Subject to Enforcement: Operational Planning Analysis, Real-time Assessment (Revised Definition)
1/5/2017	Formatting of Glossary of Terms updated.
12/12/16	Updated: 'Adverse Reliability Impact' from Pending to Retired. NERC withdrew the related petition 3/18/2015
11/28/16	Updated ReliabilityFirst - Wind Generating Station term to inactive

9/28/16	Updated CIP v 5 standards effective date from 4/1/2016 to 7/1/2016 per FERC Order 822.
8/17/16	Board Adopted: Operational Planning Analysis and Real-time Assessment
7/13/16	Updated color coding of terms retired 6/30/2016 based on the terms becoming effective 7/1/2016.
6/24/16	FERC approved: Actual Frequency, Actual Net Interchange, Scheduled Net Interchange (NIS), Interchange Meter Error (IME), and Automatic Time Error Correction (ATEC)
	Reporting ACE: status updated
6/21/16	Correction: Reserve Sharing Group Reporting ACE, and Contingency Reserve changed to 11/5/2015 Board adoption date status
4/1/16	Effective: BES Cyber Asset, BES Cyber System, BES Cyber System Information, CIP Exceptional Circumstance, CIP Senior Manager, Cyber Assets, Cyber Security Incident, Dial-up Connectivity, Electronic Access Control or Monitoring Systems, Electronic Access Point, Electronic Security Perimeter, External Routable Connectivity, Interactive Remote Access, Intermediate System, Physical Access Control Systems, Physical Security Perimeter
3/31/16	Inactive: Critical Assets, Critical Cyber Assets, Cyber Assets, Cyber Security Incident, Electronic Security Perimeter, Physical Security Perimeter