

TABLE OF CONTENTS

I. NOTICES AND COMMUNICATIONS 2

II. REQUEST FOR APPROVAL OF RELIABILITY STANDARDS 2

III. CONCLUSION.....8

EXHIBITS

Exhibit A –

- 1.) Reliability Standards Applicable to Nova Scotia, Approved by FERC in First Quarter 2015
- 2.) Reliability Standards Filed for Approval; and
- 3.) Updated NERC *Glossary of Terms*

Exhibit B – Informational Summary of Each Reliability Standard Applicable to Nova Scotia, Approved by FERC in First Quarter 2015

Exhibit C – List of Currently Effective NERC Reliability Standards

I. NOTICES AND COMMUNICATIONS

Notices and communications regarding this Application may be addressed to:

Gerald W. Cauley
President and Chief Executive Officer
North American Electric Reliability Corporation
3353 Peachtree Road, N.E.
Suite 600, North Tower
Atlanta, GA 30326
(404) 446-2560
(404) 446-2595– facsimile

Charles A. Berardesco
Senior Vice President and General Counsel
Holly A. Hawkins
Associate General Counsel
Andrew C. Wills
Associate Counsel
North American Electric Reliability Corporation
1325 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 400-3000
(202) 644-8099– facsimile
charles.berardesco@nerc.net
holly.hawkins@nerc.net
andrew.wills@nerc.net

II. REQUEST FOR APPROVAL OF RELIABILITY STANDARDS

A. Background: NERC Quarterly Filing of Proposed Reliability Standards

Pursuant to Section 215 of the Federal Power Act¹, NERC has been certified by the Commission as the Electric Reliability Organization (“ERO”) in the United States.² The Reliability Standards contained in **Exhibit A** have been approved by the Commission as mandatory and enforceable for users, owners, and operators within the United States. Some or all of NERC’s Reliability Standards are also mandatory in the Canadian provinces of Alberta, British Columbia, Manitoba, New Brunswick, Nova Scotia, Ontario, Québec, and Saskatchewan.

¹ 16 U.S.C. § 824o(f) (2012) (entrusting FERC with the duties of approving and enforcing rules in the U.S. to ensure the reliability of the Nation’s bulk power system, and with the duties of certifying an Electric Reliability Organization to develop mandatory and enforceable Reliability Standards, subject to FERC review and approval).

² *N. Amer. Elec. Reliability Corp.*, 116 FERC ¶ 61,062 (“ERO Certification Order”), *order on reh’g & compliance*, 117 FERC ¶ 61,126 (2006), *aff’d sub nom. Alcoa, Inc. v. FERC*, 564 F.3d 1342 (D.C. Cir. 2009).

NERC entered into a Memorandum of Understanding (“MOU”) with the NSUARB³, and a separate MOU with Nova Scotia Power Incorporated (“NSPI”) and the Northeast Power Coordinating Council, Inc. (“NPCC”)⁴, to provide reliability services to Nova Scotia. These MOUs became effective on December 22, 2006 and May 11, 2010, respectively. The December 22, 2006 MOU memorializes the relationship between NERC and the NSUARB formed to improve the reliability of the North American Bulk-Power System. The May 11, 2010 MOU sets forth the mutual understandings of NERC, NSPI, and NPCC regarding the approval and implementation of NERC Reliability Standards and NPCC Regional Reliability Criteria in Nova Scotia and other related matters.

On June 30, 2010, NERC submitted its first set of Reliability Standards and the NERC Glossary to the NSUARB, and on July 20, 2011, NSUARB issued a decision approving these documents. In that decision, NSUARB accepted as guidance the Violation Risk Factors (“VRFs”) and Violation Severity Levels (“VSLs”) associated with the currently effective Reliability Standards.⁵ The NSUARB Decision also approved a “quarterly review” process for considering new and amended NERC standards and criteria.⁶

On September 2, 2011, NERC submitted its Second Quarter 2011 application filing to NSUARB in which NERC committed to file a quarterly application with the NSUARB within sixty days after the end of each quarter for approval of all NERC Reliability Standards and the updated NERC Glossary approved by FERC during that quarter. The NSUARB Decision stated

³ See Memorandum of Understanding between Nova Scotia Utility and Review Board and North American Electric Reliability Corporation (signed Dec. 22, 2006).

⁴ See Memorandum of Understanding between Nova Scotia Power Incorporated and the Northeast Power Coordinating Council, Inc. and the North American Electric Reliability Corporation (signed May 11, 2010).

⁵ *In the Matter of an Application by North American Electric Reliability Corporation for Approval of its Reliability Standards, and an application by Northeast Power Coordinating Council, Inc. for Approval of its Regional Reliability Criteria*, NSUARB-NERC-R-10 (July 20, 2011) (“NSUARB Decision”).

⁶ NSUARB Decision at P 30.

that quarterly “applications will not be processed by the Board until [FERC] has approved or remanded the standards in the United States.”⁷ Therefore, NERC only requests NSUARB approval for those Reliability Standards approved by FERC.

Finally, the NSUARB Decision stated that NSUARB approval is not required for VRFs and VSLs associated with proposed Reliability Standards, but the NSUARB noted that it will accept VRFs and VSLs as guidance.⁸ Thus, NERC does not seek formal approval of VRFs and VSLs associated with the Reliability Standards submitted in this quarterly application, but NERC provides a link below to the FERC-approved VRFs and VSLs associated with the NERC Reliability Standards herein for informational purposes.⁹

NERC has not included in this filing the full developmental record for the standards, which consists of the draft standards, comments received, responses to the comments by the drafting teams, and the full voting record, because the record for each standard may consist of several thousand pages. NERC will make the full developmental record available to the NSUARB or other interested parties upon request.

B. Overview of NERC Reliability Standards Development Process

NERC Reliability Standards define the requirements for reliably planning and operating the North American bulk power system. These standards are developed by industry stakeholders using a balanced, open, fair, and inclusive process managed by the NERC Standards Committee. The Standards Committee is facilitated by NERC staff and comprised of representatives from ten electricity stakeholder segments. Stakeholders, through the balloting process, have approved the

⁷ *Id.*

⁸ *Id.* at P 33.

⁹ NERC’s VRF Matrix and VSL Matrix are available at: <http://www.nerc.com/pa/Stand/Pages/AllReliabilityStandards.aspx?jurisdiction=United States>. See left-hand side of webpage for downloadable documents.

standards provided in **Exhibit A**, and the standards have been adopted by the NERC Board of Trustees.

NERC develops Reliability Standards and associated definitions in accordance with Section 300 (Reliability Standards Development) and Appendix 3A (Standards Processes Manual) of its Rules of Procedure.¹⁰ NERC's Reliability Standards development process has been approved by the American National Standards Institute as being open, inclusive, balanced, and fair. The NERC Glossary, most recently updated April 29, 2015, contains each term that is defined for use in one or more of NERC's continent-wide or regional Reliability Standards approved by the NERC Board of Trustees, and it is submitted with this application for informational purposes.

C. Description of Proposed Definitions and Reliability Standards, First Quarter 2015

As explained below, the following three FERC orders were issued in the first quarter of 2015 approving NERC Reliability Standards and related NERC Glossary terms: (1) an order approving Reliability Standard PRC-005-3¹¹, one new definition, and six revised definitions issued on January 22, 2015; (2) an order approving Reliability Standard MOD-031-1¹² and two definitions issued on February 19, 2015; and, (3) a letter order approving Reliability Standard PRC-006-2¹³ issued on March 4, 2015.¹⁴

¹⁰ NERC's Rules of Procedure are available at: <http://www.nerc.com/AboutNERC/Pages/Rules-of-Procedure.aspx>.

¹¹ *N. Amer. Elec. Reliability Corp.*, 150 ¶ 61, 039 (2015).

¹² *N. Amer. Elec. Reliability Corp.*, 150 ¶ 61, 109 (2015).

¹³ *N. Amer. Elec. Reliability Corp.*, Docket No. RD15-2-000 (Mar 4, 2015) (unpublished letter order).

¹⁴ In addition to the three standards approved by the Commission, NERC also notes that the Commission approved certain risk based initiatives. Specifically, the Commission approved the NERC Reliability Assurance Initiative, now known as the Risk-Based Compliance Monitoring and Enforcement Program, to implement NERC's transition to a risk-based approach for compliance monitoring and enforcement. *N. Amer. Elec. Reliability Corp.*, 150 ¶ 61, 108 (2015). The Commission also approved the NERC Risk Based Registration Initiative, which is intended to ensure that entities are subject to an appropriate set of applicable Reliability Standards by using a consistent approach to risk assessment and registration. *N. Amer. Elec. Reliability Corp.*, 150 ¶ 61, 213 (2015).

Reliability Standard	Effective Date
Protection and Control (PRC) Standards	
PRC-005-3*	4/1/2016
PRC-006-2*	10/1/2015
Modeling, Data, and Analysis(MOD) Standard	
MOD-031-1*	7/1/2016

* At the time of this filing, all standards marked with an asterisk are not yet effective, but have been approved by FERC and have a future mandatory effective date.

1. PRC-005-3

On January 2, 2015, FERC approved Reliability Standard PRC-005-3 (Protection System and Automatic Reclosing Maintenance), one new definition, six revised definitions to be added to the NERC Glossary, as well as the retirement of Reliability Standard PRC-005-2. Reliability Standard PRC-005-3 requires entities to develop an appropriate protection system maintenance program, to implement their program, and to initiate the follow-up activities necessary to resolve maintenance issues in the event they are unable to restore Automatic Reclosing Components to proper working order while performing maintenance.

This version is an improvement to reliability over the existing standard by making certain reclosing relays subject to a mandatory maintenance program. The newly approved definition of the term “Automatic Reclosing” and five revised definitions of the terms “Component Type,” “Component,” “Countable Event,” “Unsolved Maintenance Issue,” and “Segment” are now included in the updated NERC Glossary in **Exhibit A**.

2. MOD-031-1

On February 19, 2015, FERC approved Reliability Standards MOD-031-1 (Demand and Energy Data), the retirement of the currently effective Reliability Standards MOD-016-1.1, MOD-017-0.1, MOD-018-0, MOD-019-0.1, and MOD-021-1, and two definitions to be added to the NERC Glossary.

Reliability Standard MOD-031-1 gives planners and operators authority to collect demand, energy, and related data to support reliability studies and assessments. Reliability Standard MOD-031-1 is a new standard designed to replace, consolidate, and improve upon the Existing MOD C Standards in addressing the collection and aggregation of Demand and energy data necessary to support reliability assessments performed by the ERO and Bulk-Power System planners and operators. The approved definitions of the terms “Demand Side Management” and “Total Internal Demand” are included in the updated *NERC Glossary* in **Exhibit A**.

3. PRC-006-2

On March 4, 2015, FERC approved Reliability Standard PRC-006-2 (Automatic Underfrequency Load Shedding) and the retirement of the currently effective Reliability Standard PRC-006-1. The purpose of Reliability Standard PRC-006-2 is to establish design and documentation requirements for automatic underfrequency load shedding (“UFLS”) programs to arrest declining frequency, assist recovery of frequency following underfrequency events and provide last resort system preservation measures.

The applicability of Reliability Standard PRC-006-2 is also revised to include Planning Coordinators, UFLS entities¹⁵, and Transmission Owners that own Elements identified in the UFLS programs established by Planning Coordinators. Revisions made in PRC-006-2 improve upon the existing standard by clarifying that applicable entities are required to implement corrective actions identified by the Planning Coordinator in accordance with a schedule established by the same Planning Coordinator. The revised standard also imposes deadlines on the Planning Coordinators for development of these corrective action plans.

¹⁵ The term “UFLS entities” is defined in Section 4.2 of the Applicability section of PRC-006-2 as “all entities that are responsible for the ownership, operation, or control of UFLS equipment as required by the UFLS program established by the Planning Coordinators...”

III. CONCLUSION

NERC respectfully requests that the NSUARB approve the Reliability Standards as specified herein.

Respectfully submitted,

/s/ Andrew C. Wills

Gerald W. Cauley
President and Chief Executive Officer
North American Electric Reliability Corporation
3353 Peachtree Road, N.E.
Suite 600, North Tower
Atlanta, GA 30326
(404) 446-2560
(404) 446-2595– facsimile

Charles A. Berardesco
Senior Vice President and General Counsel
Holly A. Hawkins
Assistant General Counsel
Andrew C. Wills
Associate Counsel
North American Electric Reliability Corporation
1325 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 400-3000
(202) 644-8099– facsimile
charles.berardesco@nerc.net
holly.hawkins@nerc.net
andrew.wills@nerc.net

*Counsel for the North American Electric
Reliability Corporation*

Exhibit A (1): Reliability Standards Applicable to Nova Scotia, Approved by FERC in First Quarter 2015

Exhibit A (1): Reliability Standards Applicable to Nova Scotia, Approved by FERC in First Quarter 2015

Reliability Standard	Effective Date
Protection and Control (PRC) Standards	
PRC-005-3*	4/1/2016
PRC-006-2*	10/1/2015
Modeling, Data, and Analysis(MOD) Standard	
MOD-031-1*	7/1/2016

Exhibit A (2): PDF Copies of Reliability Standards Filed for Approval

Reliability Standard MOD-031-1

A. Introduction

1. **Title: Demand and Energy Data**
2. **Number: MOD-031-1**
3. **Purpose:** To provide authority for applicable entities to collect Demand, energy and related data to support reliability studies and assessments and to enumerate the responsibilities and obligations of requestors and respondents of that data.
4. **Applicability:**

4.1. Functional Entities:

- 4.1.1 Planning Authority and Planning Coordinator (hereafter collectively referred to as the “Planning Coordinator”)

This proposed standard combines “Planning Authority” with “Planning Coordinator” in the list of applicable functional entities. The NERC Functional Model lists “Planning Coordinator” while the registration criteria list “Planning Authority,” and they are not yet synchronized. Until that occurs, the proposed standard applies to both “Planning Authority” and “Planning Coordinator.”

- 4.1.2 Transmission Planner
- 4.1.3 Balancing Authority
- 4.1.4 Resource Planner
- 4.1.5 Load-Serving Entity
- 4.1.6 Distribution Provider

5. Effective Date

- 5.1. MOD-031-1 shall become effective on the first day of the first calendar quarter that is twelve months after the date that this standard is approved by applicable regulatory authorities or as otherwise provided for in a jurisdiction where approval by an applicable governmental authority is required for a standard to go into effect. Where approval by an applicable governmental authority is not required, the standard shall become effective on the first day of the first calendar quarter that is twelve months after the date the standard is adopted by the NERC Board of Trustees or as otherwise provided for in that jurisdiction.

6. Background:

To ensure that various forms of historical and forecast Demand and energy data and information is available to the parties that perform reliability studies and assessments, authority is needed to collect the applicable data.

The collection of Demand, Net Energy for Load and Demand Side Management data requires coordination and collaboration between Planning Authorities (Planning Coordinators), Transmission and Resource Planners, Load-Serving Entities and

Distribution Providers. Ensuring that planners and operators have access to complete and accurate load forecasts – as well as the supporting methods and assumptions used to develop these forecasts – enhances the reliability of the Bulk Electric System. Consistent documenting and information sharing activities will also improve efficient planning practices and support the identification of needed system reinforcements. Furthermore, collection of actual Demand and Demand Side Management performance during the prior year will allow for comparison to prior forecasts and further contribute to enhanced accuracy of load forecasting practices.

B. Requirements and Measures

- R1.** Each Planning Coordinator or Balancing Authority that identifies a need for the collection of Total Internal Demand, Net Energy for Load, and Demand Side Management data shall develop and issue a data request to the applicable entities in its area. The data request shall include: *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- 1.1.** A list of Transmission Planners, Balancing Authorities, Load Serving Entities, and Distribution Providers that are required to provide the data (“Applicable Entities”).
 - 1.2.** A timetable for providing the data. (A minimum of 30 calendar days must be allowed for responding to the request).
 - 1.3.** A request to provide any or all of the following actual data, as necessary:
 - 1.3.1.** Integrated hourly Demands in megawatts for the prior calendar year.
 - 1.3.2.** Monthly and annual integrated peak hour Demands in megawatts for the prior calendar year.
 - 1.3.2.1.** If the annual peak hour actual Demand varies due to weather-related conditions (e.g., temperature, humidity or wind speed), the Applicable Entity shall also provide the weather normalized annual peak hour actual Demand for the prior calendar year.
 - 1.3.3.** Monthly and annual Net Energy for Load in gigawatthours for the prior calendar year.
 - 1.3.4.** Monthly and annual peak hour controllable and dispatchable Demand Side Management under the control or supervision of the System Operator in megawatts for the prior calendar year. Three values shall be reported for each hour: 1) the committed megawatts (the amount under control or supervision), 2) the dispatched megawatts (the amount, if any, activated for use by the System Operator), and 3) the realized megawatts (the amount of actual demand reduction).
 - 1.4.** A request to provide any or all of the following forecast data, as necessary:

- 1.4.1.** Monthly peak hour forecast Total Internal Demands in megawatts for the next two calendar years.
 - 1.4.2.** Monthly forecast Net Energy for Load in gigawatthours for the next two calendar years.
 - 1.4.3.** Peak hour forecast Total Internal Demands (summer and winter) in megawatts for ten calendar years into the future.
 - 1.4.4.** Annual forecast Net Energy for Load in gigawatthours for ten calendar years into the future.
 - 1.4.5.** Total and available peak hour forecast of controllable and dispatchable Demand Side Management (summer and winter), in megawatts, under the control or supervision of the System Operator for ten calendar years into the future.
- 1.5.** A request to provide any or all of the following summary explanations, as necessary,:
 - 1.5.1.** The assumptions and methods used in the development of aggregated Peak Demand and Net Energy for Load forecasts.
 - 1.5.2.** The Demand and energy effects of controllable and dispatchable Demand Side Management under the control or supervision of the System Operator.
 - 1.5.3.** How Demand Side Management is addressed in the forecasts of its Peak Demand and annual Net Energy for Load.
 - 1.5.4.** How the controllable and dispatchable Demand Side Management forecast compares to actual controllable and dispatchable Demand Side Management for the prior calendar year and, if applicable, how the assumptions and methods for future forecasts were adjusted.
 - 1.5.5.** How the peak Demand forecast compares to actual Demand for the prior calendar year with due regard to any relevant weather-related variations (e.g., temperature, humidity, or wind speed) and, if applicable, how the assumptions and methods for future forecasts were adjusted.
- M1.** The Planning Coordinator or Balancing Authority shall have a dated data request, either in hardcopy or electronic format, in accordance with Requirement R1.
- R2.** Each Applicable Entity identified in a data request shall provide the data requested by its Planning Coordinator or Balancing Authority in accordance with the data request issued pursuant to Requirement R1. *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- M2.** Each Applicable Entity shall have evidence, such as dated e-mails or dated transmittal letters that it provided the requested data in accordance with Requirement R2.

- R3.** The Planning Coordinator or the Balancing Authority shall provide the data collected under Requirement R2 to the applicable Regional Entity within 75 calendar days of receiving a request for such data, unless otherwise agreed upon by the parties.
[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]
- M3.** Each Planning Coordinator or Balancing Authority, shall have evidence, such as dated e-mails or dated transmittal letters that it provided the data requested by the applicable Regional Entity in accordance with Requirement R3.
- R4.** Any Applicable Entity shall, in response to a written request for the data included in parts 1.3-1.5 of Requirement R1 from a Planning Coordinator, Balancing Authority, Transmission Planner or Resource Planner with a demonstrated need for such data in order to conduct reliability assessments of the Bulk Electric System, provide or otherwise make available that data to the requesting entity. This requirement does not modify an entity's obligation pursuant to Requirement R2 to respond to data requests issued by its Planning Coordinator or Balancing Authority pursuant to Requirement R1. Unless otherwise agreed upon, the Applicable Entity: *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- shall provide the requested data within 45 calendar days of the written request, subject to part 4.1 of this requirement; and
 - shall not be required to alter the format in which it maintains or uses the data.
- 4.1.** If the Applicable Entity does not provide data requested under this requirement because (1) the requesting entity did not demonstrate a reliability need for the data; or (2) providing the data would conflict with the Applicable Entity's confidentiality, regulatory, or security requirements, the Applicable Entity shall, within 30 calendar days of the written request, provide a written response to the requesting entity specifying the data that is not being provided and on what basis.
- M4.** Each Applicable Entity identified in Requirement R4 shall have evidence such as dated e-mails or dated transmittal letters that it provided the data requested or provided a written response specifying the data that is not being provided and the basis for not providing the data in accordance with Requirement R4.

C. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority

As defined in the NERC Rules of Procedure, “Compliance Enforcement Authority” means NERC or the Regional Entity in their respective roles of monitoring and enforcing compliance with the NERC Reliability Standards.

1.2. Evidence Retention

The following evidence retention periods identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

The Applicable Entity shall keep data or evidence to show compliance with Requirements R1 through R4, and Measures M1 through M4, since the last audit, unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation.

If an Applicable Entity is found non-compliant, it shall keep information related to the non-compliance until mitigation is complete and approved, or for the time specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Assessment Processes:

Compliance Audit

Self-Certification

Spot Checking

Compliance Investigation

Self-Reporting

Complaint

1.4. Additional Compliance Information

None

Table of Compliance Elements

R #	Time Horizon	VRF	Violation Severity Levels			
			Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	Long-term Planning	Medium	N/A	N/A	N/A	The Planning Coordinator or Balancing Authority developed and issued a data request but failed to include either the entity(s) necessary to provide the data or the timetable for providing the data.
R2	Long-term Planning	Medium	<p>The Applicable Entity, as defined in the data request developed in Requirement R1, failed to provide all of the data requested in Requirement R1 part 1.5.1 through part 1.5.5</p> <p>OR</p> <p>The Applicable Entity, as defined in the data request developed in Requirement R1, provided the data requested in Requirement R1, but</p>	<p>The Applicable Entity, as defined in the data request developed in Requirement R1, failed to provide one of the requested items in Requirement R1 part 1.3.1 through part 1.3.4</p> <p>OR</p> <p>The Applicable Entity, as defined in the data request developed in Requirement R1, failed to provide one of the requested items in Requirement R1 part</p>	<p>The Applicable Entity, as defined in the data request developed in Requirement R1, failed to provide two of the requested items in Requirement R1 part 1.3.1 through part 1.3.4</p> <p>OR</p> <p>The Applicable Entity, as defined in the data request developed in Requirement R1, failed to provide two of the requested items in Requirement R1 part</p>	<p>The Applicable Entity, as defined in the data request developed in Requirement R1, failed to provide three or more of the requested items in Requirement R1 part 1.3.1 through part 1.3.4</p> <p>OR</p> <p>The Applicable Entity, as defined in the data request developed in Requirement R1, failed to provide three or more of the requested items in Requirement R1 part 1.4.1 through part 1.4.5</p>

			<p>did so after the date indicated in the timetable provided pursuant to Requirement R1 part 1.2 but prior to 6 days after the date indicated in the timetable provided pursuant to Requirement R1 part 1.2.</p>	<p>1.4.1 through part 1.4.5 OR The Applicable Entity, as defined in the data request developed in Requirement R1, provided the data requested in Requirement R1, but did so 6 days after the date indicated in the timetable provided pursuant to Requirement R1 part 1.2 but prior to 11 days after the date indicated in the timetable provided pursuant to Requirement R1 part 1.2.</p>	<p>1.4.1 through part 1.4.5 OR The Applicable Entity, as defined in the data request developed in Requirement R1, provided the data requested in Requirement R1, but did so 11 days after the date indicated in the timetable provided pursuant to Requirement R1 part 1.2 but prior to 15 days after the date indicated in the timetable provided pursuant to Requirement R1 part 1.2.</p>	<p>OR The Applicable Entity, as defined in the data request developed in Requirement R1, failed to provide the data requested in the timetable provided pursuant to Requirement R1 prior to 16 days after the date indicated in the timetable provided pursuant to Requirement R1 part 1.2.</p>
R3	Long-term Planning	Medium	<p>The Planning Coordinator or Balancing Authority, in response to a request by the Regional Entity, made available the data collected under Requirement R2, but</p>	<p>The Planning Coordinator or Balancing Authority, in response to a request by the Regional Entity, made available the data collected under Requirement R2, but</p>	<p>The Planning Coordinator or Balancing Authority, in response to a request by the Regional Entity, made available the data collected under Requirement R2, but</p>	<p>The Planning Coordinator or Balancing Authority, in response to a request by the Regional Entity, failed to make available the data collected under Requirement R2 prior to 91</p>

MOD-031-1 — Demand and Energy Data

			did so after 75 days from the date of request but prior to 81 days from the date of the request.	did so after 80 days from the date of request but prior to 86 days from the date of the request.	did so after 85 days from the date of request but prior to 91 days from the date of the request.	days or more from the date of the request.
R4	Long-term Planning	Medium	<p>The Applicable Entity provided or otherwise made available the data to the requesting entity but did so after 45 days from the date of request but prior to 51 days from the date of the request</p> <p>OR</p> <p>The Applicable Entity that is not providing the data requested provided a written response specifying the data that is not being provided and on what basis but did so after 30 days of the written request but prior to 36 days of the written request.</p>	<p>The Applicable Entity provided or otherwise made available the data to the requesting entity but did so after 50 days from the date of request but prior to 56 days from the date of the request</p> <p>OR</p> <p>The Applicable Entity that is not providing the data requested provided a written response specifying the data that is not being provided and on what basis but did so after 35 days of the written request but prior to 41 days of the written request.</p>	<p>The Applicable Entity provided or otherwise made available the data to the requesting entity but did so after 55 days from the date of request but prior to 61 days from the date of the request</p> <p>OR</p> <p>The Applicable Entity that is not providing the data requested provided a written response specifying the data that is not being provided and on what basis but did so after 40 days of the written request but prior to 46 days of the written request.</p>	<p>The Applicable Entity failed to provide or otherwise make available the data to the requesting entity within 60 days from the date of the request</p> <p>OR</p> <p>The Applicable Entity that is not providing the data requested failed to provide a written response specifying the data that is not being provided and on what basis within 45 days of the written request.</p>

D. Regional Variances

None.

E. Interpretations

None.

F. Associated Documents

None.

Version History

Version	Date	Action	Change Tracking
1	May 6, 2014	Adopted by the NERC Board of Trustees.	

Application Guidelines

Rationale

During development of this standard, text boxes were embedded within the standard to explain the rationale for various parts of the standard. Upon BOT approval, the text from the rationale text boxes was moved to this section.

Rationale for R1:

Rationale for R1: To ensure that when Planning Coordinators (PCs) or Balancing Authorities (BAs) request data (R1), they identify the entities that must provide the data (Applicable Entity in part 1.1), the data to be provided (parts 1.3 – 1.5) and the due dates (part 1.2) for the requested data.

For Requirement R1 part 1.3.2.1, if the Demand does not vary due to weather-related conditions (e.g., temperature, humidity or wind speed), or the weather assumed in the forecast was the same as the actual weather, the weather normalized actual Demand will be the same as the actual demand reported for Requirement R1 part 1.3.2. Otherwise the annual peak hour weather normalized actual Demand will be different from the actual demand reported for Requirement R1 part 1.3.2.

Balancing Authorities are included here to reflect a practice in the WECC Region where BAs are the entity that perform this requirement in lieu of the PC.

Rationale for R2:

This requirement will ensure that entities identified in Requirement R1, as responsible for providing data, provide the data in accordance with the details described in the data request developed in accordance with Requirement R1. In no event shall the Applicable Entity be required to provide data under this requirement that is outside the scope of parts 1.3 - 1.5 of Requirement R1.

Rationale for R3:

This requirement will ensure that the Planning Coordinator or when applicable, the Balancing Authority, provides the data requested by the Regional Entity.

Rationale for R4:

This requirement will ensure that the Applicable Entity will make the data requested by the Planning Coordinator or Balancing Authority in Requirement R1 available to other applicable entities (Planning Coordinator, Balancing Authority, Transmission Planner or Resource Planner) unless providing the data would conflict with the provisions outlined in Requirement R4 below. The sharing of documentation of the supporting methods and assumptions used to develop forecasts as well as information-sharing activities will improve the efficiency of planning practices and support the identification of needed system reinforcements.

*** FOR INFORMATIONAL PURPOSES ONLY ***

Enforcement Dates: Standard MOD-031-1 — Demand and Energy Data

United States

Standard	Requirement	Enforcement Date	Inactive Date
MOD-031-1	All	07/01/2016	

Reliability Standard PRC-005-3

A. Introduction

1. **Title:** Protection System and Automatic Reclosing Maintenance
2. **Number:** PRC-005-3
3. **Purpose:** To document and implement programs for the maintenance of all Protection Systems and Automatic Reclosing affecting the reliability of the Bulk Electric System (BES) so that they are kept in working order.
4. **Applicability:**
 - 4.1. **Functional Entities:**
 - 4.1.1 Transmission Owner
 - 4.1.2 Generator Owner
 - 4.1.3 Distribution Provider
 - 4.2. **Facilities:**
 - 4.2.1 Protection Systems that are installed for the purpose of detecting Faults on BES Elements (lines, buses, transformers, etc.)
 - 4.2.2 Protection Systems used for underfrequency load-shedding systems installed per ERO underfrequency load-shedding requirements.
 - 4.2.3 Protection Systems used for undervoltage load-shedding systems installed to prevent system voltage collapse or voltage instability for BES reliability.
 - 4.2.4 Protection Systems installed as a Special Protection System (SPS) for BES reliability.
 - 4.2.5 Protection Systems for generator Facilities that are part of the BES, including:
 - 4.2.5.1 Protection Systems that act to trip the generator either directly or via lockout or auxiliary tripping relays.
 - 4.2.5.2 Protection Systems for generator step-up transformers for generators that are part of the BES.
 - 4.2.5.3 Protection Systems for transformers connecting aggregated generation, where the aggregated generation is part of the BES (e.g., transformers connecting facilities such as wind-farms to the BES).
 - 4.2.5.4 Protection Systems for station service or excitation transformers connected to the generator bus of generators which are part of the BES, that act to trip the generator either directly or via lockout or tripping auxiliary relays.
 - 4.2.6 Automatic Reclosing¹, including:
 - 4.2.6.1 Automatic Reclosing applied on the terminals of Elements connected to the BES bus located at generating plant substations where the total installed

¹ Automatic Reclosing addressed in Section 4.2.6.1 and 4.2.6.2 may be excluded if the equipment owner can demonstrate that a close-in three-phase fault present for twice the normal clearing time (capturing a minimum trip-close-trip time delay) does not result in a total loss of gross generation in the Interconnection exceeding the gross capacity of the largest BES generating unit within the Balancing Authority Area where the Automatic Reclosing is applied.

gross generating plant capacity is greater than the gross capacity of the largest BES generating unit within the Balancing Authority Area.

4.2.6.2 Automatic Reclosing applied on the terminals of all BES Elements at substations one bus away from generating plants specified in Section 4.2.6.1 when the substation is less than 10 circuit-miles from the generating plant substation.

4.2.6.3 Automatic Reclosing applied as an integral part of an SPS specified in Section 4.2.4.

5. Effective Date: See Implementation Plan

6. Definitions Used in this Standard: The following terms are defined for use only within PRC-005-3, and should remain with the standard upon approval rather than being moved to the Glossary of Terms.

Automatic Reclosing – Includes the following Components:

- Reclosing relay
- Control circuitry associated with the reclosing relay.

Unresolved Maintenance Issue – A deficiency identified during a maintenance activity that causes the Component to not meet the intended performance, cannot be corrected during the maintenance interval, and requires follow-up corrective action.

Segment – Components of a consistent design standard, or a particular model or type from a single manufacturer that typically share other common elements. Consistent performance is expected across the entire population of a Segment. A Segment must contain at least sixty (60) individual Components.

Component Type – Either any one of the five specific elements of the Protection System definition or any one of the two specific elements of the Automatic Reclosing definition.

Component – A Component is any individual discrete piece of equipment included in a Protection System or in Automatic Reclosing, including but not limited to a protective relay, reclosing relay, or current sensing device. The designation of what constitutes a control circuit Component is dependent upon how an entity performs and tracks the testing of the control circuitry. Some entities test their control circuits on a breaker basis whereas others test their circuitry on a local zone of protection basis. Thus, entities are allowed the latitude to designate their own definitions of control circuit Components. Another example of where the entity has some discretion on determining what constitutes a single Component is the voltage and current sensing devices, where the entity may choose either to designate a full three-phase set of such devices or a single device as a single Component.

Countable Event – A failure of a Component requiring repair or replacement, any condition discovered during the maintenance activities in Tables 1-1 through 1-5, Table 3, and Tables 4-1 through 4-2 which requires corrective action or a Protection System Misoperation attributed to hardware failure or calibration failure. Misoperations due to product design errors, software errors, relay settings different from specified settings, Protection System Component or Automatic Reclosing configuration or application errors are not included in Countable Events.

B. Requirements

- R1.** Each Transmission Owner, Generator Owner, and Distribution Provider shall establish a Protection System Maintenance Program (PSMP) for its Protection Systems and Automatic Reclosing identified in Facilities Section 4.2. [*Violation Risk Factor: Medium*] [*Time Horizon: Operations Planning*]

The PSMP shall:

- 1.1.** Identify which maintenance method (time-based, performance-based per PRC-005 Attachment A, or a combination) is used to address each Protection System and Automatic Reclosing Component Type. All batteries associated with the station dc supply Component Type of a Protection System shall be included in a time-based program as described in Table 1-4 and Table 3.
- 1.2.** Include the applicable monitored Component attributes applied to each Protection System and Automatic Reclosing Component Type consistent with the maintenance intervals specified in Tables 1-1 through 1-5, Table 2, Table 3, and Table 4-1 through 4-2 where monitoring is used to extend the maintenance intervals beyond those specified for unmonitored Protection System and Automatic Reclosing Components.
- R2.** Each Transmission Owner, Generator Owner, and Distribution Provider that uses performance-based maintenance intervals in its PSMP shall follow the procedure established in PRC-005 Attachment A to establish and maintain its performance-based intervals. [*Violation Risk Factor: Medium*] [*Time Horizon: Operations Planning*]
- R3.** Each Transmission Owner, Generator Owner, and Distribution Provider that utilizes time-based maintenance program(s) shall maintain its Protection System and Automatic Reclosing Components that are included within the time-based maintenance program in accordance with the minimum maintenance activities and maximum maintenance intervals prescribed within Tables 1-1 through 1-5, Table 2, Table 3, and Table 4-1 through 4-2. [*Violation Risk Factor: High*] [*Time Horizon: Operations Planning*]
- R4.** Each Transmission Owner, Generator Owner, and Distribution Provider that utilizes performance-based maintenance program(s) in accordance with Requirement R2 shall implement and follow its PSMP for its Protection System and Automatic Reclosing Components that are included within the performance-based program(s). [*Violation Risk Factor: High*] [*Time Horizon: Operations Planning*]
- R5.** Each Transmission Owner, Generator Owner, and Distribution Provider shall demonstrate efforts to correct identified Unresolved Maintenance Issues. [*Violation Risk Factor: Medium*] [*Time Horizon: Operations Planning*]

C. Measures

- M1.** Each Transmission Owner, Generator Owner and Distribution Provider shall have a documented Protection System Maintenance Program in accordance with Requirement R1.

For each Protection System and Automatic Reclosing Component Type, the documentation shall include the type of maintenance method applied (time-based, performance-based, or a combination of these maintenance methods), and shall include all batteries associated with the station dc supply Component Types in a time-based program as described in Table 1-4 and Table 3. (Part 1.1)

For Component Types that use monitoring to extend the maintenance intervals, the responsible entity(s) shall have evidence for each Protection System and Automatic Reclosing Component Type (such as manufacturer’s specifications or engineering drawings) of the appropriate

monitored Component attributes as specified in Tables 1-1 through 1-5, Table 2, Table 3, and Table 4-1 through 4-2. (Part 1.2)

- M2.** Each Transmission Owner, Generator Owner, and Distribution Provider that uses performance-based maintenance intervals shall have evidence that its current performance-based maintenance program(s) is in accordance with Requirement R2, which may include but is not limited to Component lists, dated maintenance records, and dated analysis records and results.
- M3.** Each Transmission Owner, Generator Owner, and Distribution Provider that utilizes time-based maintenance program(s) shall have evidence that it has maintained its Protection System and Automatic Reclosing Components included within its time-based program in accordance with Requirement R3. The evidence may include but is not limited to dated maintenance records, dated maintenance summaries, dated check-off lists, dated inspection records, or dated work orders.
- M4.** Each Transmission Owner, Generator Owner, and Distribution Provider that utilizes performance-based maintenance intervals in accordance with Requirement R2 shall have evidence that it has implemented the Protection System Maintenance Program for the Protection System and Automatic Reclosing Components included in its performance-based program in accordance with Requirement R4. The evidence may include but is not limited to dated maintenance records, dated maintenance summaries, dated check-off lists, dated inspection records, or dated work orders.
- M5.** Each Transmission Owner, Generator Owner, and Distribution Provider shall have evidence that it has undertaken efforts to correct identified Unresolved Maintenance Issues in accordance with Requirement R5. The evidence may include but is not limited to work orders, replacement Component orders, invoices, project schedules with completed milestones, return material authorizations (RMAs) or purchase orders.

D. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority

As defined in the NERC Rules of Procedure, “Compliance Enforcement Authority” means NERC or the Regional Entity in their respective roles of monitoring and enforcing compliance with the NERC Reliability Standards.

1.2. Compliance Monitoring and Enforcement Processes:

- Compliance Audit
- Self-Certification
- Spot Checking
- Compliance Investigation
- Self-Reporting
- Complaint

1.3. Evidence Retention

The following evidence retention periods identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

Standard PRC-005-3 — Protection System and Automatic Reclosing Maintenance

The Transmission Owner, Generator Owner, and Distribution Provider shall each keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation.

For Requirement R1, the Transmission Owner, Generator Owner, and Distribution Provider shall each keep its current dated Protection System Maintenance Program, as well as any superseded versions since the preceding compliance audit, including the documentation that specifies the type of maintenance program applied for each Protection System Component Type.

For Requirement R2, Requirement R3, Requirement R4, and Requirement R5, the Transmission Owner, Generator Owner, and Distribution Provider shall each keep documentation of the two most recent performances of each distinct maintenance activity for the Protection System or Automatic Reclosing Component, or all performances of each distinct maintenance activity for the Protection System or Automatic Reclosing Component since the previous scheduled audit date, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.4. Additional Compliance Information

None.

Standard PRC-005-3 — Protection System and Automatic Reclosing Maintenance

2. Violation Severity Levels

Requirement Number	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	The responsible entity’s PSMP failed to specify whether one Component Type is being addressed by time-based or performance-based maintenance, or a combination of both. (Part 1.1)	The responsible entity’s PSMP failed to specify whether two Component Types are being addressed by time-based or performance-based maintenance, or a combination of both. (Part 1.1)	<p>The responsible entity’s PSMP failed to specify whether three Component Types are being addressed by time-based or performance-based maintenance, or a combination of both. (Part 1.1).</p> <p>OR</p> <p>The responsible entity’s PSMP failed to include the applicable monitoring attributes applied to each Component Type consistent with the maintenance intervals specified in Tables 1-1 through 1-5, Table 2, Table 3, and Tables 4-1 through 4-2 where monitoring is used to extend the maintenance intervals beyond those specified for unmonitored Components. (Part 1.2).</p>	<p>The responsible entity failed to establish a PSMP.</p> <p>OR</p> <p>The responsible entity’s PSMP failed to specify whether four or more Component Types are being addressed by time-based or performance-based maintenance, or a combination of both. (Part 1.1).</p> <p>OR</p> <p>The responsible entity’s PSMP failed to include applicable station batteries in a time-based program. (Part 1.1)</p>
R2	The responsible entity uses performance-based maintenance intervals in its PSMP but failed to reduce Countable Events to no more than 4% within three years.	NA	The responsible entity uses performance-based maintenance intervals in its PSMP but failed to reduce Countable Events to no more than 4% within four years.	<p>The responsible entity uses performance-based maintenance intervals in its PSMP but:</p> <ol style="list-style-type: none"> 1) Failed to establish the technical justification described within Requirement R2 for the initial use of the performance-based PSMP <p>OR</p> <ol style="list-style-type: none"> 2) Failed to reduce Countable Events to no more than 4% within five years <p>OR</p>

Standard PRC-005-3 — Protection System and Automatic Reclosing Maintenance

Requirement Number	Lower VSL	Moderate VSL	High VSL	Severe VSL
				3) Maintained a Segment with less than 60 Components OR 4) Failed to: <ul style="list-style-type: none"> • Annually update the list of Components, OR • Annually perform maintenance on the greater of 5% of the Segment population or 3 Components, OR • Annually analyze the program activities and results for each Segment.
R3	For Components included within a time-based maintenance program, the responsible entity failed to maintain 5% or less of the total Components included within a specific Component Type, in accordance with the minimum maintenance activities and maximum maintenance intervals prescribed within Tables 1-1 through 1-5, Table 2, Table 3, and Tables 4-1 through 4-2.	For Components included within a time-based maintenance program, the responsible entity failed to maintain more than 5% but 10% or less of the total Components included within a specific Component Type, in accordance with the minimum maintenance activities and maximum maintenance intervals prescribed within Tables 1-1 through 1-5, Table 2, Table 3, and Tables 4-1 through 4-2.	For Components included within a time-based maintenance program, the responsible entity failed to maintain more than 10% but 15% or less of the total Components included within a specific Component Type, in accordance with the minimum maintenance activities and maximum maintenance intervals prescribed within Tables 1-1 through 1-5, Table 2, Table 3, and Tables 4-1 through 4-2.	For Components included within a time-based maintenance program, the responsible entity failed to maintain more than 15% of the total Components included within a specific Component Type, in accordance with the minimum maintenance activities and maximum maintenance intervals prescribed within Tables 1-1 through 1-5, Table 2, Table 3, and Tables 4-1 through 4-2.
R4	For Components included within a performance-based maintenance program, the responsible entity failed to maintain 5% or less of the annual scheduled maintenance for a specific	For Components included within a performance-based maintenance program, the responsible entity failed to maintain more than 5% but 10% or less of the annual scheduled maintenance for a specific	For Components included within a performance-based maintenance program, the responsible entity failed to maintain more than 10% but 15% or less of the annual scheduled maintenance for a specific	For Components included within a performance-based maintenance program, the responsible entity failed to maintain more than 15% of the annual scheduled maintenance for a specific

Standard PRC-005-3 — Protection System and Automatic Reclosing Maintenance

Requirement Number	Lower VSL	Moderate VSL	High VSL	Severe VSL
	Component Type in accordance with their performance-based PSMP.	Component Type in accordance with their performance-based PSMP.	Component Type in accordance with their performance-based PSMP.	Component Type in accordance with their performance-based PSMP.
R5	The responsible entity failed to undertake efforts to correct 5 or fewer identified Unresolved Maintenance Issues.	The responsible entity failed to undertake efforts to correct greater than 5, but less than or equal to 10 identified Unresolved Maintenance Issues.	The responsible entity failed to undertake efforts to correct greater than 10, but less than or equal to 15 identified Unresolved Maintenance Issues.	The responsible entity failed to undertake efforts to correct greater than 15 identified Unresolved Maintenance Issues.

E. Regional Variances

None

F. Supplemental Reference Document

The following documents present a detailed discussion about determination of maintenance intervals and other useful information regarding establishment of a maintenance program.

1. PRC-005-2 Protection System Maintenance Supplementary Reference and FAQ — March 2013.
2. Considerations for Maintenance and Testing of Autoreclosing Schemes — November 2012.

Version History

Version	Date	Action	Change Tracking
0	April 1, 2005	Effective Date	New
1	December 1, 2005	<ol style="list-style-type: none"> 1. Changed incorrect use of certain hyphens (-) to “en dash” (–) and “em dash (—).” 2. Added “periods” to items where appropriate. 3. Changed “Timeframe” to “Time Frame” in item D, 1.2. 	01/20/05
1a	February 17, 2011	Added Appendix 1 - Interpretation regarding applicability of standard to protection of radially connected transformers	Project 2009-17 interpretation
1a	February 17, 2011	Adopted by Board of Trustees	
1a	September 26, 2011	FERC Order issued approving interpretation of R1 and R2 (FERC’s Order is effective as of September 26, 2011)	
1.1a	February 1, 2012	Errata change: Clarified inclusion of generator interconnection Facility in Generator Owner’s responsibility	Revision under Project 2010-07
1b	February 3, 2012	FERC Order issued approving interpretation of R1, R1.1, and R1.2 (FERC’s Order dated March 14, 2012). Updated version from 1a to 1b.	Project 2009-10 Interpretation
1.1b	April 23, 2012	Updated standard version to 1.1b to reflect FERC approval of PRC-005-1b.	Revision under Project 2010-07

Standard PRC-005-3 — Protection System and Automatic Reclosing Maintenance

1.1b	May 9, 2012	PRC-005-1.1b was adopted by the Board of Trustees as part of Project 2010-07 (GOTO).	
2	November 7, 2012	Adopted by Board of Trustees	Project 2007-17 - Complete revision, absorbing maintenance requirements from PRC-005-1.1b, PRC-008-0, PRC-011-0, PRC-017-0
2	October 17, 2013	Errata Change: The Standards Committee approved an errata change to the implementation plan for PRC-005-2 to add the phrase “or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities;” to the second sentence under the “Retirement of Existing	
3	November 7, 2013	Adopted by the NERC Board of Trustees	Revised to address the FERC directive in Order No.758 to include Automatic Reclosing in maintenance programs.
3	February 12, 2014	Approved by NERC Standards Committee	Errata Change: The Standards Committee approved errata changes to correct capitalization of certain defined terms within the definitions of “Unresolved Maintenance Issue” and “Protection System Maintenance Program”. The changes will be reflected in the definitions section of PRC-005-3 for “Unresolved Maintenance Issue” and in the NERC Glossary of Terms for “Protection System Maintenance Program”. (no change to standard version number)

Standard PRC-005-3 — Protection System and Automatic Reclosing Maintenance

3	March 7, 2014	Adopted by NERC Board of Trustees	Modified R1 VSL in response to FERC directive (no change to standard version number)
3	January 22, 2015	FERC Order issued approving PRC-005-3	

Table 1-1 Component Type - Protective Relay Excluding distributed UFLS and distributed UVLS (see Table 3)		
Component Attributes	Maximum Maintenance Interval ²	Maintenance Activities
Any unmonitored protective relay not having all the monitoring attributes of a category below.	6 Calendar Years	For all unmonitored relays: <ul style="list-style-type: none"> • Verify that settings are as specified For non-microprocessor relays: <ul style="list-style-type: none"> • Test and, if necessary calibrate For microprocessor relays: <ul style="list-style-type: none"> • Verify operation of the relay inputs and outputs that are essential to proper functioning of the Protection System. • Verify acceptable measurement of power system input values.
Monitored microprocessor protective relay with the following: <ul style="list-style-type: none"> • Internal self-diagnosis and alarming (see Table 2). • Voltage and/or current waveform sampling three or more times per power cycle, and conversion of samples to numeric values for measurement calculations by microprocessor electronics. • Alarming for power supply failure (see Table 2). 	12 Calendar Years	Verify: <ul style="list-style-type: none"> • Settings are as specified. • Operation of the relay inputs and outputs that are essential to proper functioning of the Protection System. • Acceptable measurement of power system input values.

² For the tables in this standard, a calendar year starts on the first day of a new year (January 1) after a maintenance activity has been completed. For the tables in this standard, a calendar month starts on the first day of the first month after a maintenance activity has been completed.

Table 1-1 Component Type - Protective Relay Excluding distributed UFLS and distributed UVLS (see Table 3)		
Component Attributes	Maximum Maintenance Interval ²	Maintenance Activities
Monitored microprocessor protective relay with preceding row attributes and the following: <ul style="list-style-type: none"> • Ac measurements are continuously verified by comparison to an independent ac measurement source, with alarming for excessive error (See Table 2). • Some or all binary or status inputs and control outputs are monitored by a process that continuously demonstrates ability to perform as designed, with alarming for failure (See Table 2). • Alarming for change of settings (See Table 2). 	12 Calendar Years	Verify only the unmonitored relay inputs and outputs that are essential to proper functioning of the Protection System.

Table 1-2 Component Type - Communications Systems Excluding distributed UFLS and distributed UVLS (see Table 3)		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Any unmonitored communications system necessary for correct operation of protective functions, and not having all the monitoring attributes of a category below.	4 Calendar Months	Verify that the communications system is functional.
	6 Calendar Years	Verify that the communications system meets performance criteria pertinent to the communications technology applied (e.g. signal level, reflected power, or data error rate). Verify operation of communications system inputs and outputs that are essential to proper functioning of the Protection System.
Any communications system with continuous monitoring or periodic automated testing for the presence of the channel function, and alarming for loss of function (See Table 2).	12 Calendar Years	Verify that the communications system meets performance criteria pertinent to the communications technology applied (e.g. signal level, reflected power, or data error rate). Verify operation of communications system inputs and outputs that are essential to proper functioning of the Protection System.
Any communications system with all of the following: <ul style="list-style-type: none"> • Continuous monitoring or periodic automated testing for the performance of the channel using criteria pertinent to the communications technology applied (e.g. signal level, reflected power, or data error rate, and alarming for excessive performance degradation). (See Table 2) • Some or all binary or status inputs and control outputs are monitored by a process that continuously demonstrates ability to perform as designed, with alarming for failure (See Table 2). 	12 Calendar Years	Verify only the unmonitored communications system inputs and outputs that are essential to proper functioning of the Protection System

Table 1-3 Component Type - Voltage and Current Sensing Devices Providing Inputs to Protective Relays Excluding distributed UFLS and distributed UVLS (see Table 3)		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Any voltage and current sensing devices not having monitoring attributes of the category below.	12 Calendar Years	Verify that current and voltage signal values are provided to the protective relays.
Voltage and Current Sensing devices connected to microprocessor relays with AC measurements are continuously verified by comparison of sensing input value, as measured by the microprocessor relay, to an independent ac measurement source, with alarming for unacceptable error or failure (see Table 2).	No periodic maintenance specified	None.

Table 1-4(a) Component Type – Protection System Station dc Supply Using Vented Lead-Acid (VLA) Batteries Excluding distributed UFLS and distributed UVLS (see Table 3) Protection System Station dc supply used only for non-BES interrupting devices for SPS, non-distributed UFLS systems, or non-distributed UVLS systems is excluded (see Table 1-4(e)).		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Protection System Station dc supply using Vented Lead-Acid (VLA) batteries not having monitoring attributes of Table 1-4(f).	4 Calendar Months	Verify: <ul style="list-style-type: none"> • Station dc supply voltage Inspect: <ul style="list-style-type: none"> • Electrolyte level • For unintentional grounds
	18 Calendar Months	Verify: <ul style="list-style-type: none"> • Float voltage of battery charger • Battery continuity • Battery terminal connection resistance • Battery intercell or unit-to-unit connection resistance Inspect: <ul style="list-style-type: none"> • Cell condition of all individual battery cells where cells are visible – or measure battery cell/unit internal ohmic values where the cells are not visible • Physical condition of battery rack

Standard PRC-005-3 — Protection System and Automatic Reclosing Maintenance

Table 1-4(a)
Component Type – Protection System Station dc Supply Using Vented Lead-Acid (VLA) Batteries
Excluding distributed UFLS and distributed UVLS (see Table 3)

Protection System Station dc supply used only for non-BES interrupting devices for SPS, non-distributed UFLS systems, or non-distributed UVLS systems is excluded (see Table 1-4(e)).

Component Attributes	Maximum Maintenance Interval	Maintenance Activities
	18 Calendar Months -or- 6 Calendar Years	Verify that the station battery can perform as manufactured by evaluating cell/unit measurements indicative of battery performance (e.g. internal ohmic values or float current) against the station battery baseline. -or- Verify that the station battery can perform as manufactured by conducting a performance or modified performance capacity test of the entire battery bank.

Table 1-4(b) Component Type – Protection System Station dc Supply Using Valve-Regulated Lead-Acid (VRLA) Batteries Excluding distributed UFLS and distributed UVLS (see Table 3)		
Protection System Station dc supply used only for non-BES interrupting devices for SPS, non-distributed UFLS systems, or non-distributed UVLS systems is excluded (see Table 1-4(e)).		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Protection System Station dc supply with Valve Regulated Lead-Acid (VRLA) batteries not having monitoring attributes of Table 1-4(f).	4 Calendar Months	Verify: <ul style="list-style-type: none"> • Station dc supply voltage Inspect: <ul style="list-style-type: none"> • For unintentional grounds
	6 Calendar Months	Inspect: <ul style="list-style-type: none"> • Condition of all individual units by measuring battery cell/unit internal ohmic values.
	18 Calendar Months	Verify: <ul style="list-style-type: none"> • Float voltage of battery charger • Battery continuity • Battery terminal connection resistance • Battery intercell or unit-to-unit connection resistance Inspect: <ul style="list-style-type: none"> • Physical condition of battery rack

<p align="center">Table 1-4(b) Component Type – Protection System Station dc Supply Using Valve-Regulated Lead-Acid (VRLA) Batteries Excluding distributed UFLS and distributed UVLS (see Table 3)</p> <p align="center">Protection System Station dc supply used only for non-BES interrupting devices for SPS, non-distributed UFLS systems, or non-distributed UVLS systems is excluded (see Table 1-4(e)).</p>		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
	6 Calendar Months -or- 3 Calendar Years	Verify that the station battery can perform as manufactured by evaluating cell/unit measurements indicative of battery performance (e.g. internal ohmic values or float current) against the station battery baseline. -or- Verify that the station battery can perform as manufactured by conducting a performance or modified performance capacity test of the entire battery bank.

Table 1-4(c) Component Type – Protection System Station dc Supply Using Nickel-Cadmium (NiCad) Batteries Excluding distributed UFLS and distributed UVLS (see Table 3)		
Protection System Station dc supply used only for non-BES interrupting devices for SPS, non-distributed UFLS system, or non-distributed UVLS systems is excluded (see Table 1-4(e)).		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Protection System Station dc supply Nickel-Cadmium (NiCad) batteries not having monitoring attributes of Table 1-4(f).	4 Calendar Months	Verify: <ul style="list-style-type: none"> • Station dc supply voltage Inspect: <ul style="list-style-type: none"> • Electrolyte level • For unintentional grounds
	18 Calendar Months	Verify: <ul style="list-style-type: none"> • Float voltage of battery charger • Battery continuity • Battery terminal connection resistance • Battery intercell or unit-to-unit connection resistance Inspect: <ul style="list-style-type: none"> • Cell condition of all individual battery cells. • Physical condition of battery rack
	6 Calendar Years	Verify that the station battery can perform as manufactured by conducting a performance or modified performance capacity test of the entire battery bank.

Table 1-4(d) Component Type – Protection System Station dc Supply Using Non Battery Based Energy Storage Excluding distributed UFLS and distributed UVLS (see Table 3)		
Protection System Station dc supply used only for non-BES interrupting devices for SPS, non-distributed UFLS system, or non-distributed UVLS systems is excluded (see Table 1-4(e)).		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Any Protection System station dc supply not using a battery and not having monitoring attributes of Table 1-4(f).	4 Calendar Months	Verify: <ul style="list-style-type: none"> • Station dc supply voltage Inspect: <ul style="list-style-type: none"> • For unintentional grounds
	18 Calendar Months	Inspect: Condition of non-battery based dc supply
	6 Calendar Years	Verify that the dc supply can perform as manufactured when ac power is not present.

Table 1-4(e) Component Type – Protection System Station dc Supply for non-BES Interrupting Devices for SPS, non-distributed UFLS, and non-distributed UVLS systems		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Any Protection System dc supply used for tripping only non-BES interrupting devices as part of a SPS, non-distributed UFLS, or non-distributed UVLS system and not having monitoring attributes of Table 1-4(f).	When control circuits are verified (See Table 1-5)	Verify Station dc supply voltage.

Table 1-4(f) Exclusions for Protection System Station dc Supply Monitoring Devices and Systems		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Any station dc supply with high and low voltage monitoring and alarming of the battery charger voltage to detect charger overvoltage and charger failure (See Table 2).	No periodic maintenance specified	No periodic verification of station dc supply voltage is required.
Any battery based station dc supply with electrolyte level monitoring and alarming in every cell (See Table 2).		No periodic inspection of the electrolyte level for each cell is required.
Any station dc supply with unintentional dc ground monitoring and alarming (See Table 2).		No periodic inspection of unintentional dc grounds is required.
Any station dc supply with charger float voltage monitoring and alarming to ensure correct float voltage is being applied on the station dc supply (See Table 2).		No periodic verification of float voltage of battery charger is required.
Any battery based station dc supply with monitoring and alarming of battery string continuity (See Table 2).		No periodic verification of the battery continuity is required.
Any battery based station dc supply with monitoring and alarming of the intercell and/or terminal connection detail resistance of the entire battery (See Table 2).		No periodic verification of the intercell and terminal connection resistance is required.
Any Valve Regulated Lead-Acid (VRLA) or Vented Lead-Acid (VLA) station battery with internal ohmic value or float current monitoring and alarming, and evaluating present values relative to baseline internal ohmic values for every cell/unit (See Table 2).		No periodic evaluation relative to baseline of battery cell/unit measurements indicative of battery performance is required to verify the station battery can perform as manufactured.
Any Valve Regulated Lead-Acid (VRLA) or Vented Lead-Acid (VLA) station battery with monitoring and alarming of each cell/unit internal ohmic value (See Table 2).		No periodic inspection of the condition of all individual units by measuring battery cell/unit internal ohmic values of a station VRLA or Vented Lead-Acid (VLA) battery is required.

Table 1-5 Component Type - Control Circuitry Associated With Protective Functions Excluding distributed UFLS and distributed UVLS (see Table 3)		
Note: Table requirements apply to all Control Circuitry Components of Protection Systems, and SPSs except as noted.		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Trip coils or actuators of circuit breakers, interrupting devices, or mitigating devices (regardless of any monitoring of the control circuitry).	6 Calendar Years	Verify that each trip coil is able to operate the circuit breaker, interrupting device, or mitigating device.
Electromechanical lockout devices which are directly in a trip path from the protective relay to the interrupting device trip coil (regardless of any monitoring of the control circuitry).	6 Calendar Years	Verify electrical operation of electromechanical lockout devices.
Unmonitored control circuitry associated with SPS. (See Table 4-2(b) for SPS which include Automatic Reclosing.)	12 Calendar Years	Verify all paths of the control circuits essential for proper operation of the SPS.
Unmonitored control circuitry associated with protective functions inclusive of all auxiliary relays.	12 Calendar Years	Verify all paths of the trip circuits inclusive of all auxiliary relays through the trip coil(s) of the circuit breakers or other interrupting devices.
Control circuitry associated with protective functions and/or SPSs whose integrity is monitored and alarmed (See Table 2).	No periodic maintenance specified	None.

Table 2 – Alarming Paths and Monitoring In Tables 1-1 through 1-5, Table 3, and Tables 4-1 through 4-2, alarm attributes used to justify extended maximum maintenance intervals and/or reduced maintenance activities are subject to the following maintenance requirements		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Any alarm path through which alarms in Tables 1-1 through 1-5, Table 3, and Tables 4-1 through 4-2 are conveyed from the alarm origin to the location where corrective action can be initiated, and not having all the attributes of the “Alarm Path with monitoring” category below. Alarms are reported within 24 hours of detection to a location where corrective action can be initiated.	12 Calendar Years	Verify that the alarm path conveys alarm signals to a location where corrective action can be initiated.
Alarm Path with monitoring: The location where corrective action is taken receives an alarm within 24 hours for failure of any portion of the alarming path from the alarm origin to the location where corrective action can be initiated.	No periodic maintenance specified	None.

Table 3 Maintenance Activities and Intervals for distributed UFLS and distributed UVLS Systems		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Any unmonitored protective relay not having all the monitoring attributes of a category below.	6 Calendar Years	Verify that settings are as specified. For non-microprocessor relays: <ul style="list-style-type: none"> • Test and, if necessary calibrate. For microprocessor relays: <ul style="list-style-type: none"> • Verify operation of the relay inputs and outputs that are essential to proper functioning of the Protection System. • Verify acceptable measurement of power system input values.
Monitored microprocessor protective relay with the following: <ul style="list-style-type: none"> • Internal self diagnosis and alarming (See Table 2). • Voltage and/or current waveform sampling three or more times per power cycle, and conversion of samples to numeric values for measurement calculations by microprocessor electronics. Alarming for power supply failure (See Table 2).	12 Calendar Years	Verify: <ul style="list-style-type: none"> • Settings are as specified. • Operation of the relay inputs and outputs that are essential to proper functioning of the Protection System. • Acceptable measurement of power system input values
Monitored microprocessor protective relay with preceding row attributes and the following: <ul style="list-style-type: none"> • Ac measurements are continuously verified by comparison to an independent ac measurement source, with alarming for excessive error (See Table 2). • Some or all binary or status inputs and control outputs are monitored by a process that continuously demonstrates ability to perform as designed, with alarming for failure (See Table 2). Alarming for change of settings (See Table 2).	12 Calendar Years	Verify only the unmonitored relay inputs and outputs that are essential to proper functioning of the Protection System.

Standard PRC-005-3 — Protection System and Automatic Reclosing Maintenance

Table 3 Maintenance Activities and Intervals for distributed UFLS and distributed UVLS Systems		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Voltage and/or current sensing devices associated with UFLS or UVLS systems.	12 Calendar Years	Verify that current and/or voltage signal values are provided to the protective relays.
Protection System dc supply for tripping non-BES interrupting devices used only for a UFLS or UVLS system.	12 Calendar Years	Verify Protection System dc supply voltage.
Control circuitry between the UFLS or UVLS relays and electromechanical lockout and/or tripping auxiliary devices (excludes non-BES interrupting device trip coils).	12 Calendar Years	Verify the path from the relay to the lockout and/or tripping auxiliary relay (including essential supervisory logic).
Electromechanical lockout and/or tripping auxiliary devices associated only with UFLS or UVLS systems (excludes non-BES interrupting device trip coils).	12 Calendar Years	Verify electrical operation of electromechanical lockout and/or tripping auxiliary devices.
Control circuitry between the electromechanical lockout and/or tripping auxiliary devices and the non-BES interrupting devices in UFLS or UVLS systems, or between UFLS or UVLS relays (with no interposing electromechanical lockout or auxiliary device) and the non-BES interrupting devices (excludes non-BES interrupting device trip coils).	No periodic maintenance specified	None.
Trip coils of non-BES interrupting devices in UFLS or UVLS systems.	No periodic maintenance specified	None.

Table 4-1 Maintenance Activities and Intervals for Automatic Reclosing Components Component Type – Reclosing Relay		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Any unmonitored reclosing relay not having all the monitoring attributes of a category below.	6 Calendar Years	Verify that settings are as specified. For non-microprocessor relays: <ul style="list-style-type: none"> • Test and, if necessary calibrate For microprocessor relays: <ul style="list-style-type: none"> • Verify operation of the relay inputs and outputs that are essential to proper functioning of the Automatic Reclosing.
Monitored microprocessor reclosing relay with the following: <ul style="list-style-type: none"> • Internal self diagnosis and alarming (See Table 2). • Alarming for power supply failure (See Table 2). 	12 Calendar Years	Verify: <ul style="list-style-type: none"> • Settings are as specified. • Operation of the relay inputs and outputs that are essential to proper functioning of the Automatic Reclosing.

Table 4-2(a) Maintenance Activities and Intervals for Automatic Reclosing Components Component Type – Control Circuitry Associated with Reclosing Relays that are NOT an Integral Part of an SPS		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Unmonitored Control circuitry associated with Automatic Reclosing that is not an integral part of an SPS.	12 Calendar Years	Verify that Automatic Reclosing, upon initiation, does not issue a premature closing command to the close circuitry.
Control circuitry associated with Automatic Reclosing that is not part of an SPS and is monitored and alarmed for conditions that would result in a premature closing command. (See Table 2)	No periodic maintenance specified	None.

Table 4-2(b) Maintenance Activities and Intervals for Automatic Reclosing Components Component Type – Control Circuitry Associated with Reclosing Relays that ARE an Integral Part of an SPS		
Component Attributes	Maximum Maintenance Interval	Maintenance Activities
Close coils or actuators of circuit breakers or similar devices that are used in conjunction with Automatic Reclosing as part of an SPS (regardless of any monitoring of the control circuitry).	6 Calendar Years	Verify that each close coil or actuator is able to operate the circuit breaker or mitigating device.
Unmonitored close control circuitry associated with Automatic Reclosing used as an integral part of an SPS.	12 Calendar Years	Verify all paths of the control circuits associated with Automatic Reclosing that are essential for proper operation of the SPS.
Control circuitry associated with Automatic Reclosing that is an integral part of an SPS whose integrity is monitored and alarmed. (See Table 2)	No periodic maintenance specified	None.

PRC-005 — Attachment A

Criteria for a Performance-Based Protection System Maintenance Program

Purpose: To establish a technical basis for initial and continued use of a performance-based Protection System Maintenance Program (PSMP).

To establish the technical justification for the initial use of a performance-based PSMP:

1. Develop a list with a description of Components included in each designated Segment, with a minimum **Segment** population of 60 Components.
2. Maintain the Components in each Segment according to the time-based maximum allowable intervals established in Tables 1-1 through 1-5, Table 3, and Tables 4-1 through 4-2 until results of maintenance activities for the Segment are available for a minimum of 30 individual Components of the Segment.
3. Document the maintenance program activities and results for each Segment, including maintenance dates and Countable Events for each included Component.
4. Analyze the maintenance program activities and results for each Segment to determine the overall performance of the Segment and develop maintenance intervals.
5. Determine the maximum allowable maintenance interval for each Segment such that the Segment experiences **Countable Events** on no more than 4% of the Components within the Segment, for the greater of either the last 30 Components maintained or all Components maintained in the previous year.

To maintain the technical justification for the ongoing use of a performance-based PSMP:

1. At least annually, update the list of Components and Segments and/or description if any changes occur within the Segment.
2. Perform maintenance on the greater of 5% of the Components (addressed in the performance based PSMP) in each Segment or 3 individual Components within the Segment in each year.
3. For the prior year, analyze the maintenance program activities and results for each Segment to determine the overall performance of the Segment.
4. Using the prior year's data, determine the maximum allowable maintenance interval for each Segment such that the Segment experiences Countable Events on no more than 4% of the Components within the Segment, for the greater of either the last 30 Components maintained or all Components maintained in the previous year.
5. If the Components in a Segment maintained through a performance-based PSMP experience 4% or more Countable Events, develop, document, and implement an action plan to reduce the Countable Events to less than 4% of the Segment population within 3 years.

*** FOR INFORMATIONAL PURPOSES ONLY ***

Enforcement Dates: Standard PRC-005-3 — Protection System and Automatic Reclosing Maintenance

United States

Standard	Requirement	Enforcement Date	Inactive Date
PRC-005-3	All	04/01/2016	

Reliability Standard PRC-006-2

A. Introduction

1. **Title:** Automatic Underfrequency Load Shedding
2. **Number:** PRC-006-2
3. **Purpose:** To establish design and documentation requirements for automatic underfrequency load shedding (UFLS) programs to arrest declining frequency, assist recovery of frequency following underfrequency events and provide last resort system preservation measures.
4. **Applicability:**
 - 4.1. Planning Coordinators
 - 4.2. UFLS entities shall mean all entities that are responsible for the ownership, operation, or control of UFLS equipment as required by the UFLS program established by the Planning Coordinators. Such entities may include one or more of the following:
 - 4.2.1 Transmission Owners
 - 4.2.2 Distribution Providers
 - 4.3. Transmission Owners that own Elements identified in the UFLS program established by the Planning Coordinators.
5. **Effective Date:**

This standard is effective on the first day of the first calendar quarter six months after the date that the standard is approved by an applicable governmental authority or as otherwise provided for in a jurisdiction where approval by an applicable governmental authority is required for a standard to go into effect. Where approval by an applicable governmental authority is not required, the standard shall become effective on the first day of the first calendar quarter after the date the standard is adopted by the NERC Board of Trustees or as otherwise provided for in that jurisdiction.
6. **Background:**

PRC-006-2 was developed under Project 2008-02: Underfrequency Load Shedding (UFLS). The drafting team revised PRC-006-1 for the purpose of addressing the directive issued in FERC Order No. 763. *Automatic Underfrequency Load Shedding and Load Shedding Plans Reliability Standards*, 139 FERC ¶ 61,098 (2012).

B. Requirements and Measures

- R1.** Each Planning Coordinator shall develop and document criteria, including consideration of historical events and system studies, to select portions of the Bulk Electric System (BES), including interconnected portions of the BES in adjacent Planning Coordinator areas and Regional Entity areas that may form islands. *[VRF: Medium][Time Horizon: Long-term Planning]*
- M1.** Each Planning Coordinator shall have evidence such as reports, or other documentation of its criteria to select portions of the Bulk Electric System that may form islands including how system studies and historical events were considered to develop the criteria per Requirement R1.
- R2.** Each Planning Coordinator shall identify one or more islands to serve as a basis for designing its UFLS program including: *[VRF: Medium][Time Horizon: Long-term Planning]*
- 2.1.** Those islands selected by applying the criteria in Requirement R1, and
 - 2.2.** Any portions of the BES designed to detach from the Interconnection (planned islands) as a result of the operation of a relay scheme or Special Protection System, and
 - 2.3.** A single island that includes all portions of the BES in either the Regional Entity area or the Interconnection in which the Planning Coordinator's area resides. If a Planning Coordinator's area resides in multiple Regional Entity areas, each of those Regional Entity areas shall be identified as an island. Planning Coordinators may adjust island boundaries to differ from Regional Entity area boundaries by mutual consent where necessary for the sole purpose of producing contiguous regional islands more suitable for simulation.
- M2.** Each Planning Coordinator shall have evidence such as reports, memorandums, e-mails, or other documentation supporting its identification of an island(s) as a basis for designing a UFLS program that meet the criteria in Requirement R2, Parts 2.1 through 2.3.
- R3.** Each Planning Coordinator shall develop a UFLS program, including notification of and a schedule for implementation by UFLS entities within its area, that meets the following performance characteristics in simulations of underfrequency conditions resulting from an imbalance scenario, where an imbalance = $[(\text{load} - \text{actual generation output}) / (\text{load})]$, of up to 25 percent within the identified island(s). *[VRF: High][Time Horizon: Long-term Planning]*
- 3.1.** Frequency shall remain above the Underfrequency Performance Characteristic curve in PRC-006-2 - Attachment 1, either for 60 seconds or until a steady-state condition between 59.3 Hz and 60.7 Hz is reached, and
 - 3.2.** Frequency shall remain below the Overfrequency Performance Characteristic curve in PRC-006-2 - Attachment 1, either for 60 seconds or until a steady-state condition between 59.3 Hz and 60.7 Hz is reached, and

- 3.3.** Volts per Hz (V/Hz) shall not exceed 1.18 per unit for longer than two seconds cumulatively per simulated event, and shall not exceed 1.10 per unit for longer than 45 seconds cumulatively per simulated event at each generator bus and generator step-up transformer high-side bus associated with each of the following:
- Individual generating units greater than 20 MVA (gross nameplate rating) directly connected to the BES
 - Generating plants/facilities greater than 75 MVA (gross aggregate nameplate rating) directly connected to the BES
 - Facilities consisting of one or more units connected to the BES at a common bus with total generation above 75 MVA gross nameplate rating.
- M3.** Each Planning Coordinator shall have evidence such as reports, memorandums, e-mails, program plans, or other documentation of its UFLS program, including the notification of the UFLS entities of implementation schedule, that meet the criteria in Requirement R3, Parts 3.1 through 3.3.
- R4.** Each Planning Coordinator shall conduct and document a UFLS design assessment at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement R3 for each island identified in Requirement R2. The simulation shall model each of the following: *[VRF: High][Time Horizon: Long-term Planning]*
- 4.1.** Underfrequency trip settings of individual generating units greater than 20 MVA (gross nameplate rating) directly connected to the BES that trip above the Generator Underfrequency Trip Modeling curve in PRC-006-2 - Attachment 1.
 - 4.2.** Underfrequency trip settings of generating plants/facilities greater than 75 MVA (gross aggregate nameplate rating) directly connected to the BES that trip above the Generator Underfrequency Trip Modeling curve in PRC-006-2 - Attachment 1.
 - 4.3.** Underfrequency trip settings of any facility consisting of one or more units connected to the BES at a common bus with total generation above 75 MVA (gross nameplate rating) that trip above the Generator Underfrequency Trip Modeling curve in PRC-006-2 - Attachment 1.
 - 4.4.** Overfrequency trip settings of individual generating units greater than 20 MVA (gross nameplate rating) directly connected to the BES that trip below the Generator Overfrequency Trip Modeling curve in PRC-006-2 — Attachment 1.
 - 4.5.** Overfrequency trip settings of generating plants/facilities greater than 75 MVA (gross aggregate nameplate rating) directly connected to the BES that trip below the Generator Overfrequency Trip Modeling curve in PRC-006-2 — Attachment 1.
 - 4.6.** Overfrequency trip settings of any facility consisting of one or more units connected to the BES at a common bus with total generation above 75 MVA

(gross nameplate rating) that trip below the Generator Overfrequency Trip Modeling curve in PRC-006-2 — Attachment 1.

- 4.7.** Any automatic Load restoration that impacts frequency stabilization and operates within the duration of the simulations run for the assessment.
- M4.** Each Planning Coordinator shall have dated evidence such as reports, dynamic simulation models and results, or other dated documentation of its UFLS design assessment that demonstrates it meets Requirement R4, Parts 4.1 through 4.7.
- R5.** Each Planning Coordinator, whose area or portions of whose area is part of an island identified by it or another Planning Coordinator which includes multiple Planning Coordinator areas or portions of those areas, shall coordinate its UFLS program design with all other Planning Coordinators whose areas or portions of whose areas are also part of the same identified island through one of the following: *[VRF: High][Time Horizon: Long-term Planning]*
- Develop a common UFLS program design and schedule for implementation per Requirement R3 among the Planning Coordinators whose areas or portions of whose areas are part of the same identified island, or
 - Conduct a joint UFLS design assessment per Requirement R4 among the Planning Coordinators whose areas or portions of whose areas are part of the same identified island, or
 - Conduct an independent UFLS design assessment per Requirement R4 for the identified island, and in the event the UFLS design assessment fails to meet Requirement R3, identify modifications to the UFLS program(s) to meet Requirement R3 and report these modifications as recommendations to the other Planning Coordinators whose areas or portions of whose areas are also part of the same identified island and the ERO.
- M5.** Each Planning Coordinator, whose area or portions of whose area is part of an island identified by it or another Planning Coordinator which includes multiple Planning Coordinator areas or portions of those areas, shall have dated evidence such as joint UFLS program design documents, reports describing a joint UFLS design assessment, letters that include recommendations, or other dated documentation demonstrating that it coordinated its UFLS program design with all other Planning Coordinators whose areas or portions of whose areas are also part of the same identified island per Requirement R5.
- R6.** Each Planning Coordinator shall maintain a UFLS database containing data necessary to model its UFLS program for use in event analyses and assessments of the UFLS program at least once each calendar year, with no more than 15 months between maintenance activities. *[VRF: Lower][Time Horizon: Long-term Planning]*
- M6.** Each Planning Coordinator shall have dated evidence such as a UFLS database, data requests, data input forms, or other dated documentation to show that it maintained a UFLS database for use in event analyses and assessments of the UFLS program per

Requirement R6 at least once each calendar year, with no more than 15 months between maintenance activities.

- R7.** Each Planning Coordinator shall provide its UFLS database containing data necessary to model its UFLS program to other Planning Coordinators within its Interconnection within 30 calendar days of a request. *[VRF: Lower][Time Horizon: Long-term Planning]*
- M7.** Each Planning Coordinator shall have dated evidence such as letters, memorandums, e-mails or other dated documentation that it provided their UFLS database to other Planning Coordinators within their Interconnection within 30 calendar days of a request per Requirement R7.
- R8.** Each UFLS entity shall provide data to its Planning Coordinator(s) according to the format and schedule specified by the Planning Coordinator(s) to support maintenance of each Planning Coordinator's UFLS database. *[VRF: Lower][Time Horizon: Long-term Planning]*
- M8.** Each UFLS Entity shall have dated evidence such as responses to data requests, spreadsheets, letters or other dated documentation that it provided data to its Planning Coordinator according to the format and schedule specified by the Planning Coordinator to support maintenance of the UFLS database per Requirement R8.
- R9.** Each UFLS entity shall provide automatic tripping of Load in accordance with the UFLS program design and schedule for implementation, including any Corrective Action Plan, as determined by its Planning Coordinator(s) in each Planning Coordinator area in which it owns assets. *[VRF: High][Time Horizon: Long-term Planning]*
- M9.** Each UFLS Entity shall have dated evidence such as spreadsheets summarizing feeder load armed with UFLS relays, spreadsheets with UFLS relay settings, or other dated documentation that it provided automatic tripping of load in accordance with the UFLS program design and schedule for implementation , including any Corrective Action Plan, per Requirement R9.
- R10.** Each Transmission Owner shall provide automatic switching of its existing capacitor banks, Transmission Lines, and reactors to control over-voltage as a result of underfrequency load shedding if required by the UFLS program and schedule for implementation, including any Corrective Action Plan, as determined by the Planning Coordinator(s) in each Planning Coordinator area in which the Transmission Owner owns transmission. *[VRF: High][Time Horizon: Long-term Planning]*
- M10.** Each Transmission Owner shall have dated evidence such as relay settings, tripping logic or other dated documentation that it provided automatic switching of its existing capacitor banks, Transmission Lines, and reactors in order to control over-voltage as a result of underfrequency load shedding if required by the UFLS program and schedule for implementation, including any Corrective Action Plan, per Requirement R10.
- R11.** Each Planning Coordinator, in whose area a BES islanding event results in system frequency excursions below the initializing set points of the UFLS program, shall

conduct and document an assessment of the event within one year of event actuation to evaluate: *[VRF: Medium][Time Horizon: Operations Assessment]*

11.1. The performance of the UFLS equipment,

11.2. The effectiveness of the UFLS program.

M11. Each Planning Coordinator shall have dated evidence such as reports, data gathered from an historical event, or other dated documentation to show that it conducted an event assessment of the performance of the UFLS equipment and the effectiveness of the UFLS program per Requirement R11.

R12. Each Planning Coordinator, in whose islanding event assessment (per R11) UFLS program deficiencies are identified, shall conduct and document a UFLS design assessment to consider the identified deficiencies within two years of event actuation. *[VRF: Medium][Time Horizon: Operations Assessment]*

M12. Each Planning Coordinator shall have dated evidence such as reports, data gathered from an historical event, or other dated documentation to show that it conducted a UFLS design assessment per Requirements R12 and R4 if UFLS program deficiencies are identified in R11.

R13. Each Planning Coordinator, in whose area a BES islanding event occurred that also included the area(s) or portions of area(s) of other Planning Coordinator(s) in the same islanding event and that resulted in system frequency excursions below the initializing set points of the UFLS program, shall coordinate its event assessment (in accordance with Requirement R11) with all other Planning Coordinators whose areas or portions of whose areas were also included in the same islanding event through one of the following: *[VRF: Medium][Time Horizon: Operations Assessment]*

- Conduct a joint event assessment per Requirement R11 among the Planning Coordinators whose areas or portions of whose areas were included in the same islanding event, or
- Conduct an independent event assessment per Requirement R11 that reaches conclusions and recommendations consistent with those of the event assessments of the other Planning Coordinators whose areas or portions of whose areas were included in the same islanding event, or
- Conduct an independent event assessment per Requirement R11 and where the assessment fails to reach conclusions and recommendations consistent with those of the event assessments of the other Planning Coordinators whose areas or portions of whose areas were included in the same islanding event, identify differences in the assessments that likely resulted in the differences in the conclusions and recommendations and report these differences to the other Planning Coordinators whose areas or portions of whose areas were included in the same islanding event and the ERO.

M13. Each Planning Coordinator, in whose area a BES islanding event occurred that also included the area(s) or portions of area(s) of other Planning Coordinator(s) in the same

islanding event and that resulted in system frequency excursions below the initializing set points of the UFLS program, shall have dated evidence such as a joint assessment report, independent assessment reports and letters describing likely reasons for differences in conclusions and recommendations, or other dated documentation demonstrating it coordinated its event assessment (per Requirement R11) with all other Planning Coordinator(s) whose areas or portions of whose areas were also included in the same islanding event per Requirement R13.

- R14.** Each Planning Coordinator shall respond to written comments submitted by UFLS entities and Transmission Owners within its Planning Coordinator area following a comment period and before finalizing its UFLS program, indicating in the written response to comments whether changes will be made or reasons why changes will not be made to the following [*VRF: Lower*][*Time Horizon: Long-term Planning*]:
- 14.1.** UFLS program, including a schedule for implementation
 - 14.2.** UFLS design assessment
 - 14.3.** Format and schedule of UFLS data submittal
- M14.** Each Planning Coordinator shall have dated evidence of responses, such as e-mails and letters, to written comments submitted by UFLS entities and Transmission Owners within its Planning Coordinator area following a comment period and before finalizing its UFLS program per Requirement R14.
- R15.** Each Planning Coordinator that conducts a UFLS design assessment under Requirement R4, R5, or R12 and determines that the UFLS program does not meet the performance characteristics in Requirement R3, shall develop a Corrective Action Plan and a schedule for implementation by the UFLS entities within its area. [*VRF: High*][*Time Horizon: Long-term Planning*]
- 15.1.** For UFLS design assessments performed under Requirement R4 or R5, the Corrective Action Plan shall be developed within the five-year time frame identified in Requirement R4.
 - 15.2.** For UFLS design assessments performed under Requirement R12, the Corrective Action Plan shall be developed within the two-year time frame identified in Requirement R12.
- M15.** Each Planning Coordinator that conducts a UFLS design assessment under Requirement R4, R5, or R12 and determines that the UFLS program does not meet the performance characteristics in Requirement R3, shall have a dated Corrective Action Plan and a schedule for implementation by the UFLS entities within its area, that was developed within the time frame identified in Part 15.1 or 15.2.

C. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority

As defined in the NERC Rules of Procedure, “Compliance Enforcement Authority” (CEA) means NERC or the Regional Entity in their respective roles of monitoring and enforcing compliance with the NERC Reliability Standards.

1.2. Evidence Retention

Each Planning Coordinator and UFLS entity shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- Each Planning Coordinator shall retain the current evidence of Requirements R1, R2, R3, R4, R5, R12, R14, and R15, Measures M1, M2, M3, M4, M5, M12, M14, and M15 as well as any evidence necessary to show compliance since the last compliance audit.
- Each Planning Coordinator shall retain the current evidence of UFLS database update in accordance with Requirement R6, Measure M6, and evidence of the prior year’s UFLS database update.
- Each Planning Coordinator shall retain evidence of any UFLS database transmittal to another Planning Coordinator since the last compliance audit in accordance with Requirement R7, Measure M7.
- Each UFLS entity shall retain evidence of UFLS data transmittal to the Planning Coordinator(s) since the last compliance audit in accordance with Requirement R8, Measure M8.
- Each UFLS entity shall retain the current evidence of adherence with the UFLS program in accordance with Requirement R9, Measure M9, and evidence of adherence since the last compliance audit.
- Transmission Owner shall retain the current evidence of adherence with the UFLS program in accordance with Requirement R10, Measure M10, and evidence of adherence since the last compliance audit.
- Each Planning Coordinator shall retain evidence of Requirements R11, and R13, and Measures M11, and M13 for 6 calendar years.

If a Planning Coordinator or UFLS entity is found non-compliant, it shall keep information related to the non-compliance until found compliant or for the retention period specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Assessment Processes:

Compliance Audit

Self-Certification

Spot Checking

Compliance Violation Investigation

Self-Reporting

Complaints

1.4. Additional Compliance Information

None

2. Violation Severity Levels

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	N/A	<p>The Planning Coordinator developed and documented criteria but failed to include the consideration of historical events, to select portions of the BES, including interconnected portions of the BES in adjacent Planning Coordinator areas and Regional Entity areas that may form islands.</p> <p>OR</p> <p>The Planning Coordinator developed and documented criteria but failed to include the consideration of system studies, to select portions of the BES, including interconnected portions of the BES in adjacent Planning Coordinator areas and Regional Entity areas, that may form islands.</p>	<p>The Planning Coordinator developed and documented criteria but failed to include the consideration of historical events and system studies, to select portions of the BES, including interconnected portions of the BES in adjacent Planning Coordinator areas and Regional Entity areas, that may form islands.</p>	<p>The Planning Coordinator failed to develop and document criteria to select portions of the BES, including interconnected portions of the BES in adjacent Planning Coordinator areas and Regional Entity areas, that may form islands.</p>
R2	N/A	<p>The Planning Coordinator identified an island(s) to</p>	<p>The Planning Coordinator identified an island(s) to serve</p>	<p>The Planning Coordinator identified an island(s) to serve</p>

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
		<p>serve as a basis for designing its UFLS program but failed to include one (1) of the Parts as specified in Requirement R2, Parts 2.1, 2.2, or 2.3.</p>	<p>as a basis for designing its UFLS program but failed to include two (2) of the Parts as specified in Requirement R2, Parts 2.1, 2.2, or 2.3.</p>	<p>as a basis for designing its UFLS program but failed to include all of the Parts as specified in Requirement R2, Parts 2.1, 2.2, or 2.3.</p> <p>OR</p> <p>The Planning Coordinator failed to identify any island(s) to serve as a basis for designing its UFLS program.</p>
<p>R3</p>	<p>N/A</p>	<p>The Planning Coordinator developed a UFLS program, including notification of and a schedule for implementation by UFLS entities within its area where imbalance = $[(\text{load} - \text{actual generation output}) / (\text{load})]$, of up to 25 percent within the identified island(s), but failed to meet one (1) of the performance characteristic in Requirement R3, Parts 3.1, 3.2, or 3.3 in simulations of underfrequency conditions.</p>	<p>The Planning Coordinator developed a UFLS program including notification of and a schedule for implementation by UFLS entities within its area where imbalance = $[(\text{load} - \text{actual generation output}) / (\text{load})]$, of up to 25 percent within the identified island(s), but failed to meet two (2) of the performance characteristic in Requirement R3, Parts 3.1, 3.2, or 3.3 in simulations of underfrequency conditions.</p>	<p>The Planning Coordinator developed a UFLS program including notification of and a schedule for implementation by UFLS entities within its area where imbalance = $[(\text{load} - \text{actual generation output}) / (\text{load})]$, of up to 25 percent within the identified island(s), but failed to meet all the performance characteristic in Requirement R3, Parts 3.1, 3.2, and 3.3 in simulations of underfrequency conditions.</p> <p>OR</p> <p>The Planning Coordinator failed to develop a UFLS program</p>

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
				including notification of and a schedule for implementation by UFLS entities within its area
R4	The Planning Coordinator conducted and documented a UFLS assessment at least once every five years that determined through dynamic simulation whether the UFLS program design met the performance characteristics in Requirement R3 for each island identified in Requirement R2 but the simulation failed to include one (1) of the items as specified in Requirement R4, Parts 4.1 through 4.7.	The Planning Coordinator conducted and documented a UFLS assessment at least once every five years that determined through dynamic simulation whether the UFLS program design met the performance characteristics in Requirement R3 for each island identified in Requirement R2 but the simulation failed to include two (2) of the items as specified in Requirement R4, Parts 4.1 through 4.7.	The Planning Coordinator conducted and documented a UFLS assessment at least once every five years that determined through dynamic simulation whether the UFLS program design met the performance characteristics in Requirement R3 for each island identified in Requirement R2 but the simulation failed to include three (3) of the items as specified in Requirement R4, Parts 4.1 through 4.7.	The Planning Coordinator conducted and documented a UFLS assessment at least once every five years that determined through dynamic simulation whether the UFLS program design met the performance characteristics in Requirement R3 but simulation failed to include four (4) or more of the items as specified in Requirement R4, Parts 4.1 through 4.7. OR The Planning Coordinator failed to conduct and document a UFLS assessment at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement R3 for each island identified in Requirement R2

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R5	N/A	N/A	N/A	The Planning Coordinator, whose area or portions of whose area is part of an island identified by it or another Planning Coordinator which includes multiple Planning Coordinator areas or portions of those areas, failed to coordinate its UFLS program design through one of the manners described in Requirement R5.
R6	N/A	N/A	N/A	The Planning Coordinator failed to maintain a UFLS database for use in event analyses and assessments of the UFLS program at least once each calendar year, with no more than 15 months between maintenance activities.
R7	The Planning Coordinator provided its UFLS database to other Planning Coordinators more than 30 calendar days and up to and including 40 calendar days following the request.	The Planning Coordinator provided its UFLS database to other Planning Coordinators more than 40 calendar days but less than and including 50 calendar days following the request.	The Planning Coordinator provided its UFLS database to other Planning Coordinators more than 50 calendar days but less than and including 60 calendar days following the request.	The Planning Coordinator provided its UFLS database to other Planning Coordinators more than 60 calendar days following the request. OR

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
				The Planning Coordinator failed to provide its UFLS database to other Planning Coordinators.
R8	The UFLS entity provided data to its Planning Coordinator(s) less than or equal to 10 calendar days following the schedule specified by the Planning Coordinator(s) to support maintenance of each Planning Coordinator’s UFLS database.	<p>The UFLS entity provided data to its Planning Coordinator(s) more than 10 calendar days but less than or equal to 15 calendar days following the schedule specified by the Planning Coordinator(s) to support maintenance of each Planning Coordinator’s UFLS database.</p> <p>OR</p> <p>The UFLS entity provided data to its Planning Coordinator(s) but the data was not according to the format specified by the Planning Coordinator(s) to support maintenance of each Planning Coordinator’s UFLS database.</p>	The UFLS entity provided data to its Planning Coordinator(s) more than 15 calendar days but less than or equal to 20 calendar days following the schedule specified by the Planning Coordinator(s) to support maintenance of each Planning Coordinator’s UFLS database.	<p>The UFLS entity provided data to its Planning Coordinator(s) more than 20 calendar days following the schedule specified by the Planning Coordinator(s) to support maintenance of each Planning Coordinator’s UFLS database.</p> <p>OR</p> <p>The UFLS entity failed to provide data to its Planning Coordinator(s) to support maintenance of each Planning Coordinator’s UFLS database.</p>
R9	The UFLS entity provided less than 100% but more than (and including) 95% of automatic tripping of Load in accordance with the UFLS	The UFLS entity provided less than 95% but more than (and including) 90% of automatic tripping of Load in accordance with the UFLS program design	The UFLS entity provided less than 90% but more than (and including) 85% of automatic tripping of Load in accordance with the UFLS program design	The UFLS entity provided less than 85% of automatic tripping of Load in accordance with the UFLS program design and schedule for implementation,

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
	program design and schedule for implementation, including any Corrective Action Plan, as determined by the Planning Coordinator(s) area in which it owns assets.	and schedule for implementation, including any Corrective Action Plan, as determined by the Planning Coordinator(s) area in which it owns assets.	and schedule for implementation, including any Corrective Action Plan, as determined by the Planning Coordinator(s) area in which it owns assets.	including any Corrective Action Plan, as determined by the Planning Coordinator(s) area in which it owns assets.
R10	The Transmission Owner provided less than 100% but more than (and including) 95% automatic switching of its existing capacitor banks, Transmission Lines, and reactors to control over-voltage if required by the UFLS program and schedule for implementation, including any Corrective Action Plan, as determined by the Planning Coordinator(s) in each Planning Coordinator area in which the Transmission Owner owns transmission.	The Transmission Owner provided less than 95% but more than (and including) 90% automatic switching of its existing capacitor banks, Transmission Lines, and reactors to control over-voltage if required by the UFLS program and schedule for implementation, including any Corrective Action Plan, as determined by the Planning Coordinator(s) in each Planning Coordinator area in which the Transmission Owner owns transmission.	The Transmission Owner provided less than 90% but more than (and including) 85% automatic switching of its existing capacitor banks, Transmission Lines, and reactors to control over-voltage if required by the UFLS program and schedule for implementation, including any Corrective Action Plan, as determined by the Planning Coordinator(s) in each Planning Coordinator area in which the Transmission Owner owns transmission.	The Transmission Owner provided less than 85% automatic switching of its existing capacitor banks, Transmission Lines, and reactors to control over-voltage if required by the UFLS program and schedule for implementation, including any Corrective Action Plan, as determined by the Planning Coordinator(s) in each Planning Coordinator area in which the Transmission Owner owns transmission.
R11	The Planning Coordinator, in whose area a BES islanding event resulting in system frequency excursions below the initializing set points of	The Planning Coordinator, in whose area a BES islanding event resulting in system frequency excursions below the initializing set points of	The Planning Coordinator, in whose area a BES islanding event resulting in system frequency excursions below the initializing set points of the	The Planning Coordinator, in whose area a BES islanding event resulting in system frequency excursions below the initializing set points of the UFLS program,

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
	<p>the UFLS program, conducted and documented an assessment of the event and evaluated the parts as specified in Requirement R11, Parts 11.1 and 11.2 within a time greater than one year but less than or equal to 13 months of actuation.</p>	<p>the UFLS program, conducted and documented an assessment of the event and evaluated the parts as specified in Requirement R11, Parts 11.1 and 11.2 within a time greater than 13 months but less than or equal to 14 months of actuation.</p>	<p>UFLS program, conducted and documented an assessment of the event and evaluated the parts as specified in Requirement R11, Parts 11.1 and 11.2 within a time greater than 14 months but less than or equal to 15 months of actuation.</p> <p>OR</p> <p>The Planning Coordinator, in whose area an islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, conducted and documented an assessment of the event within one year of event actuation but failed to evaluate one (1) of the Parts as specified in Requirement R11, Parts 11.1 or 11.2.</p>	<p>conducted and documented an assessment of the event and evaluated the parts as specified in Requirement R11, Parts 11.1 and 11.2 within a time greater than 15 months of actuation.</p> <p>OR</p> <p>The Planning Coordinator, in whose area an islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, failed to conduct and document an assessment of the event and evaluate the Parts as specified in Requirement R11, Parts 11.1 and 11.2.</p> <p>OR</p> <p>The Planning Coordinator, in whose area an islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, conducted and documented an assessment of the event within one year of event actuation but failed to evaluate all of the Parts</p>

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
				as specified in Requirement R11, Parts 11.1 and 11.2.
R12	N/A	The Planning Coordinator, in which UFLS program deficiencies were identified per Requirement R11, conducted and documented a UFLS design assessment to consider the identified deficiencies greater than two years but less than or equal to 25 months of event actuation.	The Planning Coordinator, in which UFLS program deficiencies were identified per Requirement R11, conducted and documented a UFLS design assessment to consider the identified deficiencies greater than 25 months but less than or equal to 26 months of event actuation.	The Planning Coordinator, in which UFLS program deficiencies were identified per Requirement R11, conducted and documented a UFLS design assessment to consider the identified deficiencies greater than 26 months of event actuation. OR The Planning Coordinator, in which UFLS program deficiencies were identified per Requirement R11, failed to conduct and document a UFLS design assessment to consider the identified deficiencies.
R13	N/A	N/A	N/A	The Planning Coordinator, in whose area a BES islanding event occurred that also included the area(s) or portions of area(s) of other Planning Coordinator(s) in the same islanding event and that resulted in system frequency excursions below the initializing set points of the UFLS

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
				<p>program, failed to coordinate its UFLS event assessment with all other Planning Coordinators whose areas or portions of whose areas were also included in the same islanding event in one of the manners described in Requirement R13</p>
R14	N/A	N/A	N/A	<p>The Planning Coordinator failed to respond to written comments submitted by UFLS entities and Transmission Owners within its Planning Coordinator area following a comment period and before finalizing its UFLS program, indicating in the written response to comments whether changes were made or reasons why changes were not made to the items in Parts 14.1 through 14.3.</p>
R15	N/A	<p>The Planning Coordinator determined, through a UFLS design assessment performed under Requirement R4, R5, or R12, that the UFLS program did not meet the performance characteristics in Requirement</p>	<p>The Planning Coordinator determined, through a UFLS design assessment performed under Requirement R4, R5, or R12, that the UFLS program did not meet the performance characteristics in Requirement</p>	<p>The Planning Coordinator determined, through a UFLS design assessment performed under Requirement R4, R5, or R12, that the UFLS program did not meet the performance characteristics in Requirement</p>

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
		<p>R3, and developed a Corrective Action Plan and a schedule for implementation by the UFLS entities within its area, but exceeded the permissible time frame for development by a period of up to 1 month.</p>	<p>R3, and developed a Corrective Action Plan and a schedule for implementation by the UFLS entities within its area, but exceeded the permissible time frame for development by a period greater than 1 month but not more than 2 months.</p>	<p>R3, but failed to develop a Corrective Action Plan and a schedule for implementation by the UFLS entities within its area.</p> <p>OR</p> <p>The Planning Coordinator determined, through a UFLS design assessment performed under Requirement R4, R5, or R12, that the UFLS program did not meet the performance characteristics in Requirement R3, and developed a Corrective Action Plan and a schedule for implementation by the UFLS entities within its area, but exceeded the permissible time frame for development by a period greater than 2 months.</p>

D. Regional Variances

D.A. Regional Variance for the Quebec Interconnection

The following Interconnection-wide variance shall be applicable in the Quebec Interconnection and replaces, in their entirety, Requirements R3 and R4 and the violation severity levels associated with Requirements R3 and R4.

- D.A.3.** Each Planning Coordinator shall develop a UFLS program, including a schedule for implementation by UFLS entities within its area, that meets the following performance characteristics in simulations of underfrequency conditions resulting from an imbalance scenario, where an imbalance = $[(\text{load} - \text{actual generation output}) / (\text{load})]$, of up to 25 percent within the identified island(s).
[VRF: High][Time Horizon: Long-term Planning]
- D.A.3.1.** Frequency shall remain above the Underfrequency Performance Characteristic curve in PRC-006-2 - Attachment 1A, either for 30 seconds or until a steady-state condition between 59.3 Hz and 60.7 Hz is reached, and
- D.A.3.2.** Frequency shall remain below the Overfrequency Performance Characteristic curve in PRC-006-2 - Attachment 1A, either for 30 seconds or until a steady-state condition between 59.3 Hz and 60.7 Hz is reached, and
- D.A.3.3.** Volts per Hz (V/Hz) shall not exceed 1.18 per unit for longer than two seconds cumulatively per simulated event, and shall not exceed 1.10 per unit for longer than 45 seconds cumulatively per simulated event at each generator bus and generator step-up transformer high-side bus associated with each of the following:
- DA.3.3.1.** Individual generating unit greater than 50 MVA (gross nameplate rating) directly connected to the BES
- DA.3.3.2.** Generating plants/facilities greater than 50 MVA (gross aggregate nameplate rating) directly connected to the BES
- DA.3.3.3.** Facilities consisting of one or more units connected to the BES at a common bus with total generation above 50 MVA gross nameplate rating.
- M.D.A.3.** Each Planning Coordinator shall have evidence such as reports, memorandums, e-mails, program plans, or other documentation of its UFLS program, including the notification of the UFLS entities of implementation schedule, that meet the criteria in Requirement D.A.3 Parts D.A.3.1 through DA3.3.

- D.A.4.** Each Planning Coordinator shall conduct and document a UFLS design assessment at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D.A.3 for each island identified in Requirement R2. The simulation shall model each of the following; *[VRF: High][Time Horizon: Long-term Planning]*
- D.A.4.1** Underfrequency trip settings of individual generating units that are part of plants/facilities with a capacity of 50 MVA or more individually or cumulatively (gross nameplate rating), directly connected to the BES that trip above the Generator Underfrequency Trip Modeling curve in PRC-006-2 - Attachment 1A, and
 - D.A.4.2** Overfrequency trip settings of individual generating units that are part of plants/facilities with a capacity of 50 MVA or more individually or cumulatively (gross nameplate rating), directly connected to the BES that trip below the Generator Overfrequency Trip Modeling curve in PRC-006-2 - Attachment 1A, and
 - D.A.4.3** Any automatic Load restoration that impacts frequency stabilization and operates within the duration of the simulations run for the assessment.
- M.D.A.4.** Each Planning Coordinator shall have dated evidence such as reports, dynamic simulation models and results, or other dated documentation of its UFLS design assessment that demonstrates it meets Requirement D.A.4 Parts D.A.4.1 through D.A.4.3.

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

D#	Lower VSL	Moderate VSL	High VSL	Severe VSL
DA3	N/A	The Planning Coordinator developed a UFLS program, including a schedule for implementation by UFLS entities within its area, but failed to meet one (1) of the performance characteristic in Parts D.A.3.1, D.A.3.2, or D.A.3.3 in simulations of underfrequency conditions	The Planning Coordinator developed a UFLS program including a schedule for implementation by UFLS entities within its area, but failed to meet two (2) of the performance characteristic in Parts D.A.3.1, D.A.3.2, or D.A.3.3 in simulations of underfrequency conditions	The Planning Coordinator developed a UFLS program including a schedule for implementation by UFLS entities within its area, but failed to meet all the performance characteristic in Parts D.A.3.1, D.A.3.2, and D.A.3.3 in simulations of underfrequency conditions OR The Planning Coordinator failed to develop a UFLS program.
DA4	N/A	The Planning Coordinator conducted and documented a UFLS assessment at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D.A.3 but simulation failed to include one (1) of the items as specified in Parts D.A.4.1, D.A.4.2 or D.A.4.3.	The Planning Coordinator conducted and documented a UFLS assessment at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D3 but simulation failed to include two (2) of the items as specified in Parts D.A.4.1, D.A.4.2 or D.A.4.3.	The Planning Coordinator conducted and documented a UFLS assessment at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D3 but simulation failed to include all of the items as specified in Parts D.A.4.1, D.A.4.2 and D.A.4.3. OR

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

D#	Lower VSL	Moderate VSL	High VSL	Severe VSL
				The Planning Coordinator failed to conduct and document a UFLS assessment at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D.A.3

D.B. Regional Variance for the Western Electricity Coordinating Council

The following Interconnection-wide variance shall be applicable in the Western Electricity Coordinating Council (WECC) and replaces, in their entirety, Requirements R1, R2, R3, R4, R5, R11, R12, and R13.

D.B.1. Each Planning Coordinator shall participate in a joint regional review with the other Planning Coordinators in the WECC Regional Entity area that develops and documents criteria, including consideration of historical events and system studies, to select portions of the Bulk Electric System (BES) that may form islands. *[VRF: Medium][Time Horizon: Long-term Planning]*

M.D.B.1. Each Planning Coordinator shall have evidence such as reports, or other documentation of its criteria, developed as part of the joint regional review with other Planning Coordinators in the WECC Regional Entity area to select portions of the Bulk Electric System that may form islands including how system studies and historical events were considered to develop the criteria per Requirement D.B.1.

D.B.2. Each Planning Coordinator shall identify one or more islands from the regional review (per D.B.1) to serve as a basis for designing a region-wide coordinated UFLS program including: *[VRF: Medium][Time Horizon: Long-term Planning]*

D.B.2.1. Those islands selected by applying the criteria in Requirement D.B.1, and

D.B.2.2. Any portions of the BES designed to detach from the Interconnection (planned islands) as a result of the operation of a relay scheme or Special Protection System.

M.D.B.2. Each Planning Coordinator shall have evidence such as reports, memorandums, e-mails, or other documentation supporting its identification of an island(s), from the regional review (per D.B.1), as a basis for designing a region-wide coordinated UFLS program that meet the criteria in Requirement D.B.2 Parts D.B.2.1 and D.B.2.2.

D.B.3. Each Planning Coordinator shall adopt a UFLS program, coordinated across the WECC Regional Entity area, including notification of and a schedule for implementation by UFLS entities within its area, that meets the following performance characteristics in simulations of underfrequency conditions resulting from an imbalance scenario, where an imbalance = $[(\text{load} - \text{actual generation output}) / (\text{load})]$, of up to 25 percent within the identified island(s). *[VRF: High][Time Horizon: Long-term Planning]*

D.B.3.1. Frequency shall remain above the Underfrequency Performance Characteristic curve in PRC-006-2 - Attachment 1, either for 60 seconds or until a steady-state condition between 59.3 Hz and 60.7 Hz is reached, and

- D.B.3.2.** Frequency shall remain below the Overfrequency Performance Characteristic curve in PRC-006-2 - Attachment 1, either for 60 seconds or until a steady-state condition between 59.3 Hz and 60.7 Hz is reached, and
- D.B.3.3.** Volts per Hz (V/Hz) shall not exceed 1.18 per unit for longer than two seconds cumulatively per simulated event, and shall not exceed 1.10 per unit for longer than 45 seconds cumulatively per simulated event at each generator bus and generator step-up transformer high-side bus associated with each of the following:
 - D.B.3.3.1.** Individual generating units greater than 20 MVA (gross nameplate rating) directly connected to the BES
 - D.B.3.3.2.** Generating plants/facilities greater than 75 MVA (gross aggregate nameplate rating) directly connected to the BES
 - D.B.3.3.3.** Facilities consisting of one or more units connected to the BES at a common bus with total generation above 75 MVA gross nameplate rating.
- M.D.B.3.** Each Planning Coordinator shall have evidence such as reports, memorandums, e-mails, program plans, or other documentation of its adoption of a UFLS program, coordinated across the WECC Regional Entity area, including the notification of the UFLS entities of implementation schedule, that meet the criteria in Requirement D.B.3 Parts D.B.3.1 through D.B.3.3.
- D.B.4.** Each Planning Coordinator shall participate in and document a coordinated UFLS design assessment with the other Planning Coordinators in the WECC Regional Entity area at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D.B.3 for each island identified in Requirement D.B.2. The simulation shall model each of the following: *[VRF: High][Time Horizon: Long-term Planning]*
 - D.B.4.1.** Underfrequency trip settings of individual generating units greater than 20 MVA (gross nameplate rating) directly connected to the BES that trip above the Generator Underfrequency Trip Modeling curve in PRC-006-2 - Attachment 1.
 - D.B.4.2.** Underfrequency trip settings of generating plants/facilities greater than 75 MVA (gross aggregate nameplate rating) directly connected to the BES that trip above the Generator Underfrequency Trip Modeling curve in PRC-006-2 - Attachment 1.
 - D.B.4.3.** Underfrequency trip settings of any facility consisting of one or more units connected to the BES at a common bus with total generation

above 75 MVA (gross nameplate rating) that trip above the Generator Underfrequency Trip Modeling curve in PRC-006-2 - Attachment 1.

- D.B.4.4.** Overfrequency trip settings of individual generating units greater than 20 MVA (gross nameplate rating) directly connected to the BES that trip below the Generator Overfrequency Trip Modeling curve in PRC-006-2 — Attachment 1.
- D.B.4.5.** Overfrequency trip settings of generating plants/facilities greater than 75 MVA (gross aggregate nameplate rating) directly connected to the BES that trip below the Generator Overfrequency Trip Modeling curve in PRC-006-2 — Attachment 1.
- D.B.4.6.** Overfrequency trip settings of any facility consisting of one or more units connected to the BES at a common bus with total generation above 75 MVA (gross nameplate rating) that trip below the Generator Overfrequency Trip Modeling curve in PRC-006-2 — Attachment 1.
- D.B.4.7.** Any automatic Load restoration that impacts frequency stabilization and operates within the duration of the simulations run for the assessment.

M.D.B.4. Each Planning Coordinator shall have dated evidence such as reports, dynamic simulation models and results, or other dated documentation of its participation in a coordinated UFLS design assessment with the other Planning Coordinators in the WECC Regional Entity area that demonstrates it meets Requirement D.B.4 Parts D.B.4.1 through D.B.4.7.

D.B.11. Each Planning Coordinator, in whose area a BES islanding event results in system frequency excursions below the initializing set points of the UFLS program, shall participate in and document a coordinated event assessment with all affected Planning Coordinators to conduct and document an assessment of the event within one year of event actuation to evaluate: *[VRF: Medium][Time Horizon: Operations Assessment]*

D.B.11.1. The performance of the UFLS equipment,

D.B.11.2 The effectiveness of the UFLS program

M.D.B.11. Each Planning Coordinator shall have dated evidence such as reports, data gathered from an historical event, or other dated documentation to show that it participated in a coordinated event assessment of the performance of the UFLS equipment and the effectiveness of the UFLS program per Requirement D.B.11.

- D.B.12.** Each Planning Coordinator, in whose islanding event assessment (per D.B.11) UFLS program deficiencies are identified, shall participate in and document a coordinated UFLS design assessment of the UFLS program with the other Planning Coordinators in the WECC Regional Entity area to consider the identified deficiencies within two years of event actuation. *[VRF: Medium][Time Horizon: Operations Assessment]*
- M.D.B.12.** Each Planning Coordinator shall have dated evidence such as reports, data gathered from an historical event, or other dated documentation to show that it participated in a UFLS design assessment per Requirements D.B.12 and D.B.4 if UFLS program deficiencies are identified in D.B.11.

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

D #	Lower VSL	Moderate VSL	High VSL	Severe VSL
D.B.1	N/A	<p>The Planning Coordinator participated in a joint regional review with the other Planning Coordinators in the WECC Regional Entity area that developed and documented criteria but failed to include the consideration of historical events, to select portions of the BES, including interconnected portions of the BES in adjacent Planning Coordinator areas, that may form islands</p> <p>OR</p> <p>The Planning Coordinator participated in a joint regional review with the other Planning Coordinators in the WECC Regional Entity area that developed and documented criteria but failed to include the consideration of system studies, to select portions of the BES, including interconnected portions of the BES in adjacent Planning Coordinator areas, that may form islands</p>	<p>The Planning Coordinator participated in a joint regional review with the other Planning Coordinators in the WECC Regional Entity area that developed and documented criteria but failed to include the consideration of historical events and system studies, to select portions of the BES, including interconnected portions of the BES in adjacent Planning Coordinator areas, that may form islands</p>	<p>The Planning Coordinator failed to participate in a joint regional review with the other Planning Coordinators in the WECC Regional Entity area that developed and documented criteria to select portions of the BES, including interconnected portions of the BES in adjacent Planning Coordinator areas that may form islands</p>

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

D #	Lower VSL	Moderate VSL	High VSL	Severe VSL
D.B.2	N/A	N/A	<p>The Planning Coordinator identified an island(s) from the regional review to serve as a basis for designing its UFLS program but failed to include one (1) of the parts as specified in Requirement D.B.2, Parts D.B.2.1 or D.B.2.2</p>	<p>The Planning Coordinator identified an island(s) from the regional review to serve as a basis for designing its UFLS program but failed to include all of the parts as specified in Requirement D.B.2, Parts D.B.2.1 or D.B.2.2</p> <p>OR</p> <p>The Planning Coordinator failed to identify any island(s) from the regional review to serve as a basis for designing its UFLS program.</p>
D.B.3	N/A	<p>The Planning Coordinator adopted a UFLS program, coordinated across the WECC Regional Entity area that included notification of and a schedule for implementation by UFLS entities within its area, but failed to meet one (1) of the performance characteristic in Requirement D.B.3, Parts D.B.3.1, D.B.3.2, or D.B.3.3 in</p>	<p>The Planning Coordinator adopted a UFLS program, coordinated across the WECC Regional Entity area that included notification of and a schedule for implementation by UFLS entities within its area, but failed to meet two (2) of the performance characteristic in Requirement D.B.3, Parts D.B.3.1, D.B.3.2, or D.B.3.3 in simulations of underfrequency conditions</p>	<p>The Planning Coordinator adopted a UFLS program, coordinated across the WECC Regional Entity area that included notification of and a schedule for implementation by UFLS entities within its area, but failed to meet all the performance characteristic in Requirement D.B.3, Parts D.B.3.1, D.B.3.2, and D.B.3.3 in</p>

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

D #	Lower VSL	Moderate VSL	High VSL	Severe VSL
		simulations of underfrequency conditions		simulations of underfrequency conditions OR The Planning Coordinator failed to adopt a UFLS program, coordinated across the WECC Regional Entity area, including notification of and a schedule for implementation by UFLS entities within its area.
D.B.4	The Planning Coordinator participated in and documented a coordinated UFLS assessment with the other Planning Coordinators in the WECC Regional Entity area at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D.B.3 for each island identified in Requirement D.B.2 but the simulation failed to include one (1) of the items as specified in Requirement	The Planning Coordinator participated in and documented a coordinated UFLS assessment with the other Planning Coordinators in the WECC Regional Entity area at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D.B.3 for each island identified in Requirement D.B.2 but the simulation failed to include two (2) of the items as specified in	The Planning Coordinator participated in and documented a coordinated UFLS assessment with the other Planning Coordinators in the WECC Regional Entity area at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D.B.3 for each island identified in Requirement D.B.2 but the simulation failed to include three (3) of the items as specified in	The Planning Coordinator participated in and documented a coordinated UFLS assessment with the other Planning Coordinators in the WECC Regional Entity area at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D.B.3 for each island identified in Requirement D.B.2 but the simulation failed to include four (4) or more of the items as

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

D #	Lower VSL	Moderate VSL	High VSL	Severe VSL
	D.B.4, Parts D.B.4.1 through D.B.4.7.	Requirement D.B.4, Parts D.B.4.1 through D.B.4.7.	Requirement D.B.4, Parts D.B.4.1 through D.B.4.7.	<p>specified in Requirement D.B.4, Parts D.B.4.1 through D.B.4.7.</p> <p>OR</p> <p>The Planning Coordinator failed to participate in and document a coordinated UFLS assessment with the other Planning Coordinators in the WECC Regional Entity area at least once every five years that determines through dynamic simulation whether the UFLS program design meets the performance characteristics in Requirement D.B.3 for each island identified in Requirement D.B.2</p>
D.B.11	The Planning Coordinator, in whose area a BES islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, participated in and documented a coordinated event assessment with all Planning Coordinators whose areas or portions of whose areas were also included in the	The Planning Coordinator, in whose area a BES islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, participated in and documented a coordinated event assessment with all Planning Coordinators whose areas or portions of whose areas were also included in the same islanding event and	The Planning Coordinator, in whose area a BES islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, participated in and documented a coordinated event assessment with all Planning Coordinators whose areas or portions of whose areas were also included in the same islanding event and	The Planning Coordinator, in whose area a BES islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, participated in and documented a coordinated event assessment with all Planning Coordinators whose areas or portions of whose areas were also included in the same islanding event and

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

D #	Lower VSL	Moderate VSL	High VSL	Severe VSL
	<p>same islanding event and evaluated the parts as specified in Requirement D.B.11, Parts D.B.11.1 and D.B.11.2 within a time greater than one year but less than or equal to 13 months of actuation.</p>	<p>evaluated the parts as specified in Requirement D.B.11, Parts D.B.11.1 and D.B.11.2 within a time greater than 13 months but less than or equal to 14 months of actuation.</p>	<p>evaluated the parts as specified in Requirement D.B.11, Parts D.B.11.1 and D.B.11.2 within a time greater than 14 months but less than or equal to 15 months of actuation.</p> <p>OR</p> <p>The Planning Coordinator, in whose area an islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, participated in and documented a coordinated event assessment with all Planning Coordinators whose areas or portions of whose areas were also included in the same islanding event within one year of event actuation but failed to evaluate one (1) of the parts as specified in Requirement D.B.11, Parts D.B.11.1 or D.B.11.2.</p>	<p>evaluated the parts as specified in Requirement D.B.11, Parts D.B.11.1 and D.B.11.2 within a time greater than 15 months of actuation.</p> <p>OR</p> <p>The Planning Coordinator, in whose area an islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, failed to participate in and document a coordinated event assessment with all Planning Coordinators whose areas or portion of whose areas were also included in the same island event and evaluate the parts as specified in Requirement D.B.11, Parts D.B.11.1 and D.B.11.2.</p> <p>OR</p> <p>The Planning Coordinator, in whose area an islanding event resulting in system frequency excursions below the initializing set points of the UFLS program, participated in and documented</p>

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

D #	Lower VSL	Moderate VSL	High VSL	Severe VSL
				<p>a coordinated event assessment with all Planning Coordinators whose areas or portions of whose areas were also included in the same islanding event within one year of event actuation but failed to evaluate all of the parts as specified in Requirement D.B.11, Parts D.B.11.1 and D.B.11.2.</p>
<p>D.B.12</p>	<p>N/A</p>	<p>The Planning Coordinator, in which UFLS program deficiencies were identified per Requirement D.B.11, participated in and documented a coordinated UFLS design assessment of the coordinated UFLS program with the other Planning Coordinators in the WECC Regional Entity area to consider the identified deficiencies in greater than two years but less than or equal to 25 months of event actuation.</p>	<p>The Planning Coordinator, in which UFLS program deficiencies were identified per Requirement D.B.11, participated in and documented a coordinated UFLS design assessment of the coordinated UFLS program with the other Planning Coordinators in the WECC Regional Entity area to consider the identified deficiencies in greater than 25 months but less than or equal to 26 months of event actuation.</p>	<p>The Planning Coordinator, in which UFLS program deficiencies were identified per Requirement D.B.11, participated in and documented a coordinated UFLS design assessment of the coordinated UFLS program with the other Planning Coordinators in the WECC Regional Entity area to consider the identified deficiencies in greater than 26 months of event actuation.</p> <p>OR</p> <p>The Planning Coordinator, in which UFLS program deficiencies were identified per Requirement D.B.11, failed to participate in</p>

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

D #	Lower VSL	Moderate VSL	High VSL	Severe VSL
				and document a coordinated UFLS design assessment of the coordinated UFLS program with the other Planning Coordinators in the WECC Regional Entity area to consider the identified deficiencies


E. Associated Documents

Version History

Version	Date	Action	Change Tracking
0	April 1, 2005	Effective Date	New
1	May 25, 2010	Completed revision, merging and updating PRC-006-0, PRC-007-0 and PRC-009-0.	
1	November 4, 2010	Adopted by the Board of Trustees	
1	May 7, 2012	FERC Order issued approving PRC-006-1 (approval becomes effective July 10, 2012)	
1	November 9, 2012	FERC Letter Order issued accepting the modification of the VRF in R5 from (Medium to High) and the modification of the VSL language in R8.	
2	November 13, 2014	Adopted by the Board of Trustees	Revisions made under Project 2008-02: Undervoltage Load Shedding (UVLS) & Underfrequency Load Shedding (UFLS) to address directive issued in FERC Order No. 763. Revisions to existing Requirement R9 and R10 and addition of new Requirement R15.

PRC-006-2 – Attachment 1

Underfrequency Load Shedding Program
 Design Performance and Modeling Curves for
 Requirements R3 Parts 3.1-3.2 and R4 Parts 4.1-4.6

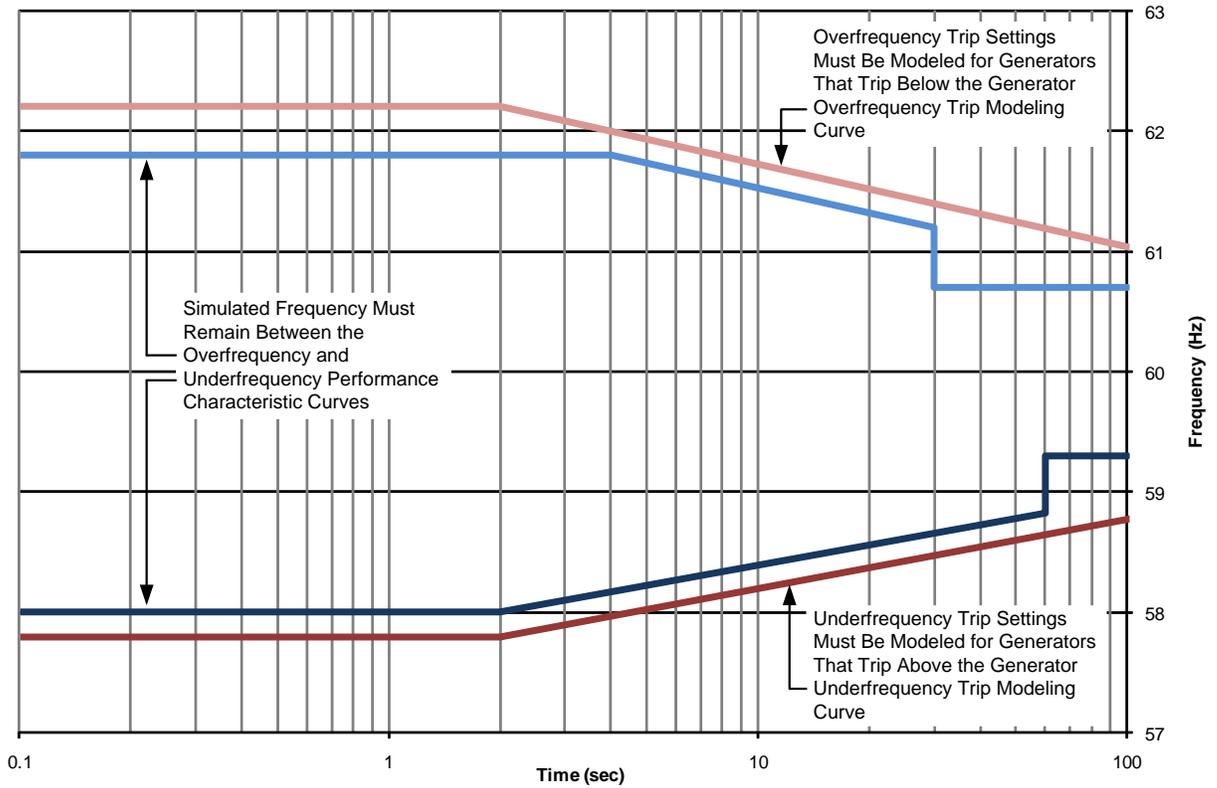

- Generator Overfrequency Trip Modeling (Requirement R4 Parts 4.4-4.6)
- Overfrequency Performance Characteristic (Requirement R3 Part 3.2)
- Underfrequency Performance Characteristic (Requirement R3 Part 3.1)
- Generator Underfrequency Trip Modeling (Requirement R4 Parts 4.1-4.3)


Curve Definitions

Generator Overfrequency Trip Modeling		Overfrequency Performance Characteristic		
$t \leq 2 \text{ s}$	$t > 2 \text{ s}$	$t \leq 4 \text{ s}$	$4 \text{ s} < t \leq 30 \text{ s}$	$t > 30 \text{ s}$
$f = 62.2 \text{ Hz}$	$f = -0.686\log(t) + 62.41 \text{ Hz}$	$f = 61.8 \text{ Hz}$	$f = -0.686\log(t) + 62.21 \text{ Hz}$	$f = 60.7 \text{ Hz}$

Generator Underfrequency Trip Modeling	Underfrequency Performance Characteristic
--	---

Standard PRC-006-2 — Automatic Underfrequency Load Shedding

$t \leq 2 \text{ s}$	$t > 2 \text{ s}$	$t \leq 2 \text{ s}$	$2 \text{ s} < t \leq 60 \text{ s}$	$t > 60 \text{ s}$
$f = 57.8$ Hz	$f = 0.575 \log(t) + 57.63$ Hz	$f = 58.0$ Hz	$f = 0.575 \log(t) + 57.83$ Hz	$f = 59.3$ Hz

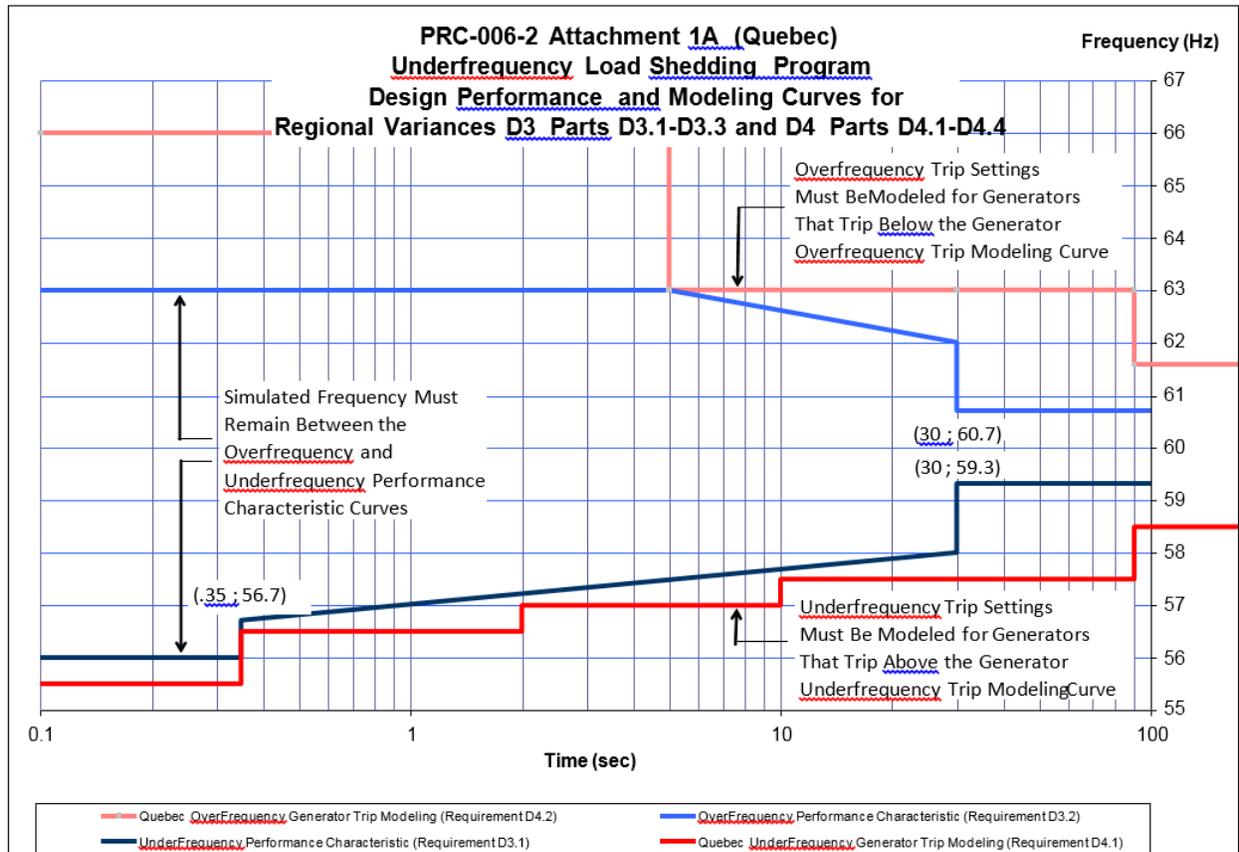

Rationale:

During development of this standard, text boxes were embedded within the standard to explain the rationale for various parts of the standard. Upon BOT approval, the text from the rationale text boxes was moved to this section.

Rationale for R9:

The “Corrective Action Plan” language was added in response to the FERC directive from Order No. 763, which raised concern that the standard failed to specify how soon an entity would need to implement corrections after a deficiency is identified by a Planning Coordinator (PC) assessment. The revised language adds clarity by requiring that each UFLS entity follow the UFLS program, including any Corrective Action Plan, developed by the PC.

Also, to achieve consistency of terminology throughout this standard, the word “application” was replaced with “implementation.” (See Requirements R3, R14 and R15)

Rationale for R10:

The “Corrective Action Plan” language was added in response to the FERC directive from Order No. 763, which raised concern that the standard failed to specify how soon an entity would need to implement corrections after a deficiency is identified by a PC assessment. The revised language adds clarity by requiring that each UFLS entity follow the UFLS program, including any Corrective Action Plan, developed by the PC.

Also, to achieve consistency of terminology throughout this standard, the word “application” was replaced with “implementation.” (See Requirements R3, R14 and R15)

Rationale for R15:

Requirement R15 was added in response to the directive from FERC Order No. 763, which raised concern that the standard failed to specify how soon an entity would need to implement corrections after a deficiency is identified by a PC assessment. Requirement R15 addresses the FERC directive by making explicit that if deficiencies are identified as a result of an assessment, the PC shall develop a Corrective Action Plan and schedule for implementation by the UFLS entities.

A “Corrective Action Plan” is defined in the NERC Glossary of Terms as, “a list of actions and an associated timetable for implementation to remedy a specific problem.” Thus, the Corrective Action Plan developed by the PC will identify the specific timeframe for an entity to implement corrections to remedy any deficiencies identified by the PC as a result of an assessment.

*** FOR INFORMATIONAL PURPOSES ONLY ***

Enforcement Dates: Standard PRC-006-2 — Automatic Underfrequency Load Shedding

United States

Standard	Requirement	Enforcement Date	Inactive Date
PRC-006-2	All	10/01/2015	

Exhibit A (3): Updated NERC *Glossary of Terms*

Glossary of Terms Used in NERC Reliability Standards

Updated April 29, 2015

Introduction:

This Glossary lists each term that was defined for use in one or more of NERC's continent-wide or Regional Reliability Standards and adopted by the NERC Board of Trustees from February 8, 2005 through April 29, 2015.

This reference is divided into two sections, and each section is organized in alphabetical order. The first section identifies all terms that have been adopted by the NERC Board of Trustees for use in continent-wide standards; the second section identifies all terms that have been adopted by the NERC Board of Trustees for use in regional standards. (WECC, NPCC and RF are the only Regions that have definitions approved by the NERC Board of Trustees. If other Regions develop definitions for approved Regional Standards using a NERC-approved standards development process, those definitions will be added to the Regional Definitions section of this glossary.)

Most of the terms identified in this glossary were adopted as part of the development of NERC's initial set of reliability standards, called the "Version 0" standards. Subsequent to the development of Version 0 standards, new definitions have been developed and approved following NERC's Reliability Standards Development Process, and added to this glossary following board adoption, with the "FERC approved" date added following a final Order approving the definition.

Immediately under each term is a link to the archive for the development of that term.

- Definitions that have been adopted by the NERC Board of Trustees but have not been approved by FERC, or FERC has not approved but has directed be modified, are shaded in blue.
- Definitions that have been remanded or retired are shaded in orange.
- Definitions that have been approved by FERC are white.

Any comments regarding this glossary should be reported to the following:

sarcomm@nerc.com with "Glossary Comment" in the subject line.

Continent-wide Definitions:

A..... 5

B..... 10

C..... 23

D..... 29

E..... 33

F..... 36

G..... 40

H..... 41

I..... 42

J..... 46

L..... 47

M..... 48

N..... 51

O..... 55

P..... 60

R..... 67

S..... 82

T..... 86

U..... 90

V..... 90

W.....	91
Y.....	91

Regional Definitions:

ERCOT Regional Definitions 92

NPCC Regional Definitions 94

Reliability*First* Regional Definitions 95

WECC Regional Definitions 96

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
Adequacy [Archive]		2/8/2005	3/16/2007	The ability of the electric system to supply the aggregate electrical demand and energy requirements of the end-use customers at all times, taking into account scheduled and reasonably expected unscheduled outages of system elements.
Adjacent Balancing Authority [Archive]		2/8/2005	3/16/2007	A Balancing Authority Area that is interconnected another Balancing Authority Area either directly or via a multi-party agreement or transmission tariff.
Adjacent Balancing Authority [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	A Balancing Authority whose Balancing Authority Area is interconnected with another Balancing Authority Area either directly or via a multi-party agreement or transmission tariff.
Adverse Reliability Impact [Archive]		2/7/2006	3/16/2007	The impact of an event that results in frequency-related instability; unplanned tripping of load or generation; or uncontrolled separation or cascading outages that affects a widespread area of the Interconnection.
Adverse Reliability Impact [Archive]		8/4/2011		The impact of an event that results in Bulk Electric System instability or Cascading.
After the Fact [Archive]	ATF	10/29/2008	12/17/2009	A time classification assigned to an RFI when the submittal time is greater than one hour after the start time of the RFI.
Agreement [Archive]		2/8/2005	3/16/2007	A contract or arrangement, either written or verbal and sometimes enforceable by law.

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
Alternative Interpersonal Communication [Archive]		11/7/2012	4/16/2015 (Becomes effective 10/1/2015)	Any Interpersonal Communication that is able to serve as a substitute for, and does not utilize the same infrastructure (medium) as, Interpersonal Communication used for day-to-day operation.
Altitude Correction Factor [Archive]		2/7/2006	3/16/2007	A multiplier applied to specify distances, which adjusts the distances to account for the change in relative air density (RAD) due to altitude from the RAD used to determine the specified distance. Altitude correction factors apply to both minimum worker approach distances and to minimum vegetation clearance distances.
Ancillary Service [Archive]		2/8/2005	3/16/2007	Those services that are necessary to support the transmission of capacity and energy from resources to loads while maintaining reliable operation of the Transmission Service Provider's transmission system in accordance with good utility practice. <i>(From FERC order 888-A.)</i>
Anti-Aliasing Filter [Archive]		2/8/2005	3/16/2007	An analog filter installed at a metering point to remove the high frequency components of the signal over the AGC sample period.
Area Control Error [Archive]	ACE	2/8/2005	3/16/2007 (Becomes inactive 3/31/14)	The instantaneous difference between a Balancing Authority's net actual and scheduled interchange, taking into account the effects of Frequency Bias and correction for meter error.

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
Area Control Error [Archive]	ACE	12/19/2012	10/16/2013 (Becomes effective 4/1/2014)	The instantaneous difference between a Balancing Authority's net actual and scheduled interchange, taking into account the effects of Frequency Bias, correction for meter error, and Automatic Time Error Correction (ATEC), if operating in the ATEC mode. ATEC is only applicable to Balancing Authorities in the Western Interconnection.
Area Interchange Methodology [Archive]		08/22/2008	11/24/2009	The Area Interchange methodology is characterized by determination of incremental transfer capability via simulation, from which Total Transfer Capability (TTC) can be mathematically derived. Capacity Benefit Margin, Transmission Reliability Margin, and Existing Transmission Commitments are subtracted from the TTC, and Postbacks and counterflows are added, to derive Available Transfer Capability. Under the Area Interchange Methodology, TTC results are generally reported on an area to area basis.
Arranged Interchange [Archive]		5/2/2006	3/16/2007	The state where the Interchange Authority has received the Interchange information (initial or revised).
Arranged Interchange [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	The state where a Request for Interchange (initial or revised) has been submitted for approval.
Attaining Balancing Authority [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	A Balancing Authority bringing generation or load into its effective control boundaries through a Dynamic Transfer from the Native Balancing Authority.

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
Automatic Generation Control [Archive]	AGC	2/8/2005	3/16/2007	Equipment that automatically adjusts generation in a Balancing Authority Area from a central location to maintain the Balancing Authority's interchange schedule plus Frequency Bias. AGC may also accommodate automatic inadvertent payback and time error correction.
Available Flowgate Capability [Archive]	AFC	08/22/2008	11/24/2009	A measure of the flow capability remaining on a Flowgate for further commercial activity over and above already committed uses. It is defined as TFC less Existing Transmission Commitments (ETC), less a Capacity Benefit Margin, less a Transmission Reliability Margin, plus Postbacks, and plus counterflows.
Available Transfer Capability [Archive]	ATC	2/8/2005	3/16/2007	A measure of the transfer capability remaining in the physical transmission network for further commercial activity over and above already committed uses. It is defined as Total Transfer Capability less existing transmission commitments (including retail customer service), less a Capacity Benefit Margin, less a Transmission Reliability Margin.
Available Transfer Capability [Archive]	ATC	08/22/2008	11/24/2009	A measure of the transfer capability remaining in the physical transmission network for further commercial activity over and above already committed uses. It is defined as Total Transfer Capability less Existing Transmission Commitments (including retail customer service), less a Capacity Benefit Margin, less a Transmission Reliability Margin, plus Postbacks, plus counterflows.

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
Available Transfer Capability Implementation Document [Archive]	ATCID	08/22/2008	11/24/2009	A document that describes the implementation of a methodology for calculating ATC or AFC, and provides information related to a Transmission Service Provider's calculation of ATC or AFC.
ATC Path [Archive]		08/22/2008	Not approved; Modification directed 11/24/09	Any combination of Point of Receipt and Point of Delivery for which ATC is calculated; and any Posted Path ¹ .

¹ See 18 CFR 37.6(b)(1)

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Balancing Authority [Archive]	BA	2/8/2005	3/16/2007	The responsible entity that integrates resource plans ahead of time, maintains load-interchange-generation balance within a Balancing Authority Area, and supports Interconnection frequency in real time.
Balancing Authority Area [Archive]		2/8/2005	3/16/2007	The collection of generation, transmission, and loads within the metered boundaries of the Balancing Authority. The Balancing Authority maintains load-resource balance within this area.
Base Load [Archive]		2/8/2005	3/16/2007	The minimum amount of electric power delivered or required over a given period at a constant rate.
BES Cyber Asset [Archive]		11/26/2012	11/22/2013 (Becomes effective 4/1/2016)	A Cyber Asset that if rendered unavailable, degraded, or misused would, within 15 minutes of its required operation, misoperation, or non-operation, adversely impact one or more Facilities, systems, or equipment, which, if destroyed, degraded, or otherwise rendered unavailable when needed, would affect the reliable operation of the Bulk Electric System. Redundancy of affected Facilities, systems, and equipment shall not be considered when determining adverse impact. Each BES Cyber Asset is included in one or more BES Cyber Systems. (A Cyber Asset is not a BES Cyber Asset if, for 30 consecutive calendar days or less, it is directly connected to a network within an ESP, a Cyber Asset within an ESP, or to a BES Cyber Asset, and it is used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.)

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
BES Cyber Asset [Archive]	BCA	2/12/2015		A Cyber Asset that if rendered unavailable, degraded, or misused would, within 15 minutes of its required operation, misoperation, or non-operation, adversely impact one or more Facilities, systems, or equipment, which, if destroyed, degraded, or otherwise rendered unavailable when needed, would affect the reliable operation of the Bulk Electric System. Redundancy of affected Facilities, systems, and equipment shall not be considered when determining adverse impact. Each BES Cyber Asset is included in one or more BES Cyber Systems.
BES Cyber System [Archive]		11/26/2012	11/22/2013 (Becomes effective 4/1/2016)	One or more BES Cyber Assets logically grouped by a responsible entity to perform one or more reliability tasks for a functional entity.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
BES Cyber System Information [Archive]		11/26/2012	11/22/2013 (Becomes effective 4/1/2016)	Information about the BES Cyber System that could be used to gain unauthorized access or pose a security threat to the BES Cyber System. BES Cyber System Information does not include individual pieces of information that by themselves do not pose a threat or could not be used to allow unauthorized access to BES Cyber Systems, such as, but not limited to, device names, individual IP addresses without context, ESP names, or policy statements. Examples of BES Cyber System Information may include, but are not limited to, security procedures or security information about BES Cyber Systems, Physical Access Control Systems, and Electronic Access Control or Monitoring Systems that is not publicly available and could be used to allow unauthorized access or unauthorized distribution; collections of network addresses; and network topology of the BES Cyber System.
Blackstart Capability Plan [Archive]		2/8/2005 Will be retired when EOP-005-2 becomes enforceable on (7/1/13)	3/16/2007	A documented procedure for a generating unit or station to go from a shutdown condition to an operating condition delivering electric power without assistance from the electric system. This procedure is only a portion of an overall system restoration plan.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Blackstart Resource [Archive]		8/5/2009	3/17/2011	A generating unit(s) and its associated set of equipment which has the ability to be started without support from the System or is designed to remain energized without connection to the remainder of the System, with the ability to energize a bus, meeting the Transmission Operator’s restoration plan needs for real and reactive power capability, frequency and voltage control, and that has been included in the Transmission Operator’s restoration plan.
Block Dispatch [Archive]		08/22/2008	11/24/2009	A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, the capacity of a given generator is segmented into loadable “blocks,” each of which is grouped and ordered relative to other blocks (based on characteristics including, but not limited to, efficiency, run of river or fuel supply considerations, and/or “must-run” status).
Bulk Electric System [Archive]	BES	2/8/2005	3/16/2007 (Becomes inactive on 6/30/2014)	As defined by the Regional Reliability Organization, the electrical generation resources, transmission lines, interconnections with neighboring systems, and associated equipment, generally operated at voltages of 100 kV or higher. Radial transmission facilities serving only load with one transmission source are generally not included in this definition.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System ² [Archive]	BES	01/18/2012	6/14/2013 (Replaced by BES definition FERC approved 3/20/2014)	<p>Unless modified by the lists shown below, all Transmission Elements operated at 100 kV or higher and Real Power and Reactive Power resources connected at 100 kV or higher. This does not include facilities used in the local distribution of electric energy.</p> <p>Inclusions:</p> <ul style="list-style-type: none"> • I1 - Transformers with the primary terminal and at least one secondary terminal operated at 100 kV or higher unless excluded under Exclusion E1 or E3. • I2 - Generating resource(s) with gross individual nameplate rating greater than 20 MVA or gross plant/facility aggregate nameplate rating greater than 75 MVA including the generator terminals through the high-side of the step-up transformer(s) connected at a voltage of 100 kV or above. • I3 - Blackstart Resources identified in the Transmission Operator’s restoration plan. • I4 - Dispersed power producing resources with aggregate capacity greater than 75 MVA (gross aggregate nameplate rating) utilizing a system designed primarily for aggregating capacity, connected at a common point at a voltage of 100 kV or above.

² FERC issued an order on April 18, 2013 approving the revised definition with an effective date of July 1, 2013. On June 14, 2013, FERC granted NERC’s request to extend the effective date of the revised definition of the Bulk Electric System to July 1, 2014.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<p>I5 –Static or dynamic devices (excluding generators) dedicated to supplying or absorbing Reactive Power that are connected at 100 kV or higher, or through a dedicated transformer with a high-side voltage of 100 kV or higher, or through a transformer that is designated in Inclusion I1.</p> <p>Exclusions:</p> <ul style="list-style-type: none"> • E1 - Radial systems: A group of contiguous transmission Elements that emanates from a single point of connection of 100 kV or higher and: <ul style="list-style-type: none"> a) Only serves Load. Or, b) Only includes generation resources, not identified in Inclusion I3, with an aggregate capacity less than or equal to 75 MVA (gross nameplate rating). Or, c) Where the radial system serves Load and includes generation resources, not identified in Inclusion I3, with an aggregate capacity of non-retail generation less than or equal to 75 MVA (gross nameplate rating). <p>Note – A normally open switching device between radial systems, as depicted on prints or one-line diagrams for example, does not affect this exclusion.</p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<ul style="list-style-type: none"> • E2 - A generating unit or multiple generating units on the customer’s side of the retail meter that serve all or part of the retail Load with electric energy if: (i) the net capacity provided to the BES does not exceed 75 MVA, and (ii) standby, back-up, and maintenance power services are provided to the generating unit or multiple generating units or to the retail Load by a Balancing Authority, or provided pursuant to a binding obligation with a Generator Owner or Generator Operator, or under terms approved by the applicable regulatory authority. • E3 - Local networks (LN): A group of contiguous transmission Elements operated at or above 100 kV but less than 300 kV that distribute power to Load rather than transfer bulk power across the interconnected system. LN’s emanate from multiple points of connection at 100 kV or higher to improve the level of service to retail customer Load and not to accommodate bulk power transfer across the interconnected system. The LN is characterized by all of the following:

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<p>a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusion I3 and do not have an aggregate capacity of non-retail generation greater than 75 MVA (gross nameplate rating);</p> <p>b) Power flows only into the LN and the LN does not transfer energy originating outside the LN for delivery through the LN; and</p> <p>c) Not part of a Flowgate or transfer path: The LN does not contain a monitored Facility of a permanent Flowgate in the Eastern Interconnection, a major transfer path within the Western Interconnection, or a comparable monitored Facility in the ERCOT or Quebec Interconnections, and is not a monitored Facility included in an Interconnection Reliability Operating Limit (IROL).</p> <ul style="list-style-type: none"> • E4 – Reactive Power devices owned and operated by the retail customer solely for its own use. Note - Elements may be included or excluded on a case-by-case basis through the Rules of Procedure exception process.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System [Archive]	BES	11/21/2013	3/20/14 (Becomes effective 7/1/2014) (Please see the Implementation Plan for Phase 2 Compliance obligations.)	Unless modified by the lists shown below, all Transmission Elements operated at 100 kV or higher and Real Power and Reactive Power resources connected at 100 kV or higher. This does not include facilities used in the local distribution of electric energy. Inclusions: <ul style="list-style-type: none"> • I1 - Transformers with the primary terminal and at least one secondary terminal operated at 100 kV or higher unless excluded by application of Exclusion E1 or E3. • I2 - Generating resource(s) including the generator terminals through the high-side of the step-up transformer(s) connected at a voltage of 100 kV or above with: <ul style="list-style-type: none"> a) Gross individual nameplate rating greater than 20 MVA. Or, b) Gross plant/facility aggregate nameplate rating greater than 75 MVA. • I3 - Blackstart Resources identified in the Transmission Operator’s restoration plan. • I4 - Dispersed power producing resources that aggregate to a total capacity greater than 75 MVA (gross nameplate rating), and that are connected through a system designed primarily for delivering such capacity to a common point of connection at a voltage of 100 kV or above. Thus, the facilities designated as BES are:

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<ul style="list-style-type: none"> a) The individual resources, and b) The system designed primarily for delivering capacity from the point where those resources aggregate to greater than 75 MVA to a common point of connection at a voltage of 100 kV or above. <ul style="list-style-type: none"> • I5 –Static or dynamic devices (excluding generators) dedicated to supplying or absorbing Reactive Power that are connected at 100 kV or higher, or through a dedicated transformer with a high-side voltage of 100 kV or higher, or through a transformer that is designated in Inclusion I1 unless excluded by application of Exclusion E4. <p>Exclusions:</p> <ul style="list-style-type: none"> • E1 - Radial systems: A group of contiguous transmission Elements that emanates from a single point of connection of 100 kV or higher and: <ul style="list-style-type: none"> a) Only serves Load. Or, b) Only includes generation resources, not identified in Inclusions I2, I3, or I4, with an aggregate capacity less than or equal to 75 MVA (gross nameplate rating). Or, c) Where the radial system serves Load and includes generation resources, not identified in Inclusions I2, I3 or I4, with an aggregate capacity of non-retail generation less than or equal to 75 MVA (gross nameplate rating).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<p>Note 1 – A normally open switching device between radial systems, as depicted on prints or one-line diagrams for example, does not affect this exclusion.</p> <p>Note 2 – The presence of a contiguous loop, operated at a voltage level of 50 kV or less, between configurations being considered as radial systems, does not affect this exclusion.</p> <ul style="list-style-type: none"> • E2 - A generating unit or multiple generating units on the customer’s side of the retail meter that serve all or part of the retail Load with electric energy if: (i) the net capacity provided to the BES does not exceed 75 MVA, and (ii) standby, back-up, and maintenance power services are provided to the generating unit or multiple generating units or to the retail Load by a Balancing Authority, or provided pursuant to a binding obligation with a Generator Owner or Generator Operator, or under terms approved by the applicable regulatory authority. • E3 - Local networks (LN): A group of contiguous transmission Elements operated at less than 300 kV that distribute power to Load rather than transfer bulk power across the interconnected system. LN’s emanate from multiple points of connection at 100 kV or higher to improve the level of service to retail customers and not to accommodate bulk power transfer across the interconnected system. The LN is characterized by all of the following: <ul style="list-style-type: none"> a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusions I2, I3, or I4 and do not have an aggregate capacity of non-retail

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<p>generation greater than 75 MVA (gross nameplate rating);</p> <p>b) Real Power flows only into the LN and the LN does not transfer energy originating outside the LN for delivery through the LN; and</p> <p>c) Not part of a Flowgate or transfer path: The LN does not contain any part of a permanent Flowgate in the Eastern Interconnection, a major transfer path within the Western Interconnection, or a comparable monitored Facility in the ERCOT or Quebec Interconnections, and is not a monitored Facility included in an Interconnection Reliability Operating Limit (IROL).</p> <ul style="list-style-type: none"> • E4 – Reactive Power devices installed for the sole benefit of a retail customer(s). <p>Note - Elements may be included or excluded on a case-by-case basis through the Rules of Procedure exception process.</p>
Bulk-Power System [Archive]		5/9/2013	7/9/2013	<p>A) facilities and control systems necessary for operating an interconnected electric energy transmission network (or any portion thereof); and (B) electric energy from generation facilities needed to maintain transmission system reliability. The term does not include facilities used in the local distribution of electric energy.</p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Burden [Archive]		2/8/2005	3/16/2007	Operation of the Bulk Electric System that violates or is expected to violate a System Operating Limit or Interconnection Reliability Operating Limit in the Interconnection, or that violates any other NERC, Regional Reliability Organization, or local operating reliability standards or criteria.
Business Practices [Archive]		8/22/2008	Not approved; Modification directed 11/24/2009	Those business rules contained in the Transmission Service Provider’s applicable tariff, rules, or procedures; associated Regional Reliability Organization or regional entity business practices; or NAESB Business Practices.
Bus-tie Breaker [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/2015)	A circuit breaker that is positioned to connect two individual substation bus configurations.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Capacity Benefit Margin [Archive]	CBM	2/8/2005	3/16/2007	The amount of firm transmission transfer capability preserved by the transmission provider for Load-Serving Entities (LSEs), whose loads are located on that Transmission Service Provider’s system, to enable access by the LSEs to generation from interconnected systems to meet generation reliability requirements. Preservation of CBM for an LSE allows that entity to reduce its installed generating capacity below that which may otherwise have been necessary without interconnections to meet its generation reliability requirements. The transmission transfer capability preserved as CBM is intended to be used by the LSE only in times of emergency generation deficiencies.
Capacity Benefit Margin Implementation Document [Archive]	CBMID	11/13/2008	11/24/2009	A document that describes the implementation of a Capacity Benefit Margin methodology.
Capacity Emergency [Archive]		2/8/2005	3/16/2007	A capacity emergency exists when a Balancing Authority Area’s operating capacity, plus firm purchases from other systems, to the extent available or limited by transfer capability, is inadequate to meet its demand plus its regulating requirements.
Cascading [Archive]		2/8/2005	3/16/2007	The uncontrolled successive loss of system elements triggered by an incident at any location. Cascading results in widespread electric service interruption that cannot be restrained from sequentially spreading beyond an area predetermined by studies.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Cascading Outages [Archive]		11/1/2006 Withdrawn 2/12/2008	FERC Remanded 12/27/2007	The uncontrolled successive loss of Bulk Electric System Facilities triggered by an incident (or condition) at any location resulting in the interruption of electric service that cannot be restrained from spreading beyond a pre-determined area.
CIP Exceptional Circumstance [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/2016)	A situation that involves or threatens to involve one or more of the following, or similar, conditions that impact safety or BES reliability: a risk of injury or death; a natural disaster; civil unrest; an imminent or existing hardware, software, or equipment failure; a Cyber Security Incident requiring emergency assistance; a response by emergency services; the enactment of a mutual assistance agreement; or an impediment of large scale workforce availability.
CIP Senior Manager [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/2016)	A single senior management official with overall authority and responsibility for leading and managing implementation of and continuing adherence to the requirements within the NERC CIP Standards, CIP-002 through CIP-011.
Clock Hour [Archive]		2/8/2005	3/16/2007	The 60-minute period ending at :00. All surveys, measurements, and reports are based on Clock Hour periods unless specifically noted.
Cogeneration [Archive]		2/8/2005	3/16/2007	Production of electricity from steam, heat, or other forms of energy produced as a by-product of another process.
Compliance Monitor [Archive]		2/8/2005	3/16/2007	The entity that monitors, reviews, and ensures compliance of responsible entities with reliability standards.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Composite Confirmed Interchange [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	The energy profile (including non-default ramp) throughout a given time period, based on the aggregate of all Confirmed Interchange occurring in that time period.
Composite Protection System [Archive]		8/14/2014		The total complement of Protection System(s) that function collectively to protect an Element. Backup protection provided by a different Element's Protection System(s) is excluded.
Confirmed Interchange [Archive]		5/2/2006	3/16/2007	The state where the Interchange Authority has verified the Arranged Interchange.
Confirmed Interchange [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	The state where no party has denied and all required parties have approved the Arranged Interchange.
Congestion Management Report [Archive]		2/8/2005	3/16/2007	A report that the Interchange Distribution Calculator issues when a Reliability Coordinator initiates the Transmission Loading Relief procedure. This report identifies the transactions and native and network load curtailments that must be initiated to achieve the loading relief requested by the initiating Reliability Coordinator.
Consequential Load Loss [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/2015)	All Load that is no longer served by the Transmission system as a result of Transmission Facilities being removed from service by a Protection System operation designed to isolate the fault.
Constrained Facility [Archive]		2/8/2005	3/16/2007	A transmission facility (line, transformer, breaker, etc.) that is approaching, is at, or is beyond its System Operating Limit or Interconnection Reliability Operating Limit.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Contingency [Archive]		2/8/2005	3/16/2007	The unexpected failure or outage of a system component, such as a generator, transmission line, circuit breaker, switch or other electrical element.
Contingency Reserve [Archive]		2/8/2005	3/16/2007	The provision of capacity deployed by the Balancing Authority to meet the Disturbance Control Standard (DCS) and other NERC and Regional Reliability Organization contingency requirements.
Contract Path [Archive]		2/8/2005	3/16/2007	An agreed upon electrical path for the continuous flow of electrical power between the parties of an Interchange Transaction.
Control Center [Archive]		11/26/12	11/22/13 (Becomes effective 4/1/16)	One or more facilities hosting operating personnel that monitor and control the Bulk Electric System (BES) in real-time to perform the reliability tasks, including their associated data centers, of: 1) a Reliability Coordinator, 2) a Balancing Authority, 3) a Transmission Operator for transmission Facilities at two or more locations, or 4) a Generator Operator for generation Facilities at two or more locations.
Control Performance Standard [Archive]	CPS	2/8/2005	3/16/2007	The reliability standard that sets the limits of a Balancing Authority's Area Control Error over a specified time period.
Corrective Action Plan [Archive]		2/7/2006	3/16/2007	A list of actions and an associated timetable for implementation to remedy a specific problem.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Cranking Path [Archive]		5/2/2006	3/16/2007	A portion of the electric system that can be isolated and then energized to deliver electric power from a generation source to enable the startup of one or more other generating units.
Critical Assets [Archive]		5/2/2006	1/18/2008 (Becomes inactive 3/31/2016)	Facilities, systems, and equipment which, if destroyed, degraded, or otherwise rendered unavailable, would affect the reliability or operability of the Bulk Electric System.
Critical Cyber Assets [Archive]		5/2/2006	1/18/2008 (Becomes inactive 3/31/2016)	Cyber Assets essential to the reliable operation of Critical Assets.
Curtailement [Archive]		2/8/2005	3/16/2007	A reduction in the scheduled capacity or energy delivery of an Interchange Transaction.
Curtailement Threshold [Archive]		2/8/2005	3/16/2007	The minimum Transfer Distribution Factor which, if exceeded, will subject an Interchange Transaction to curtailement to relieve a transmission facility constraint.
Cyber Assets [Archive]		5/2/2006	1/18/2008 (Becomes inactive 3/31/2016)	Programmable electronic devices and communication networks including hardware, software, and data.
Cyber Assets [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/2016)	Programmable electronic devices, including the hardware, software, and data in those devices.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Cyber Security Incident [Archive]		5/2/2006	1/18/2008 (Becomes inactive 3/31/2016)	Any malicious act or suspicious event that: <ul style="list-style-type: none"> • Compromises, or was an attempt to compromise, the Electronic Security Perimeter or Physical Security Perimeter of a Critical Cyber Asset, or, • Disrupts, or was an attempt to disrupt, the operation of a Critical Cyber Asset.
Cyber Security Incident [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/2016)	A malicious act or suspicious event that: <ul style="list-style-type: none"> • Compromises, or was an attempt to compromise, the Electronic Security Perimeter or Physical Security Perimeter or, • Disrupts, or was an attempt to disrupt, the operation of a BES Cyber System.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Delayed Fault Clearing [Archive]		11/1/2006	12/27/2007	Fault clearing consistent with correct operation of a breaker failure protection system and its associated breakers, or of a backup protection system with an intentional time delay.
Demand [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. The rate at which electric energy is delivered to or by a system or part of a system, generally expressed in kilowatts or megawatts, at a given instant or averaged over any designated interval of time. 2. The rate at which energy is being used by the customer.
Demand-Side Management [Archive]	DSM	2/8/2005	3/16/2007	The term for all activities or programs undertaken by Load-Serving Entity or its customers to influence the amount or timing of electricity they use.
Demand-Side Management [Archive]	DSM	5/6/2014	2/19/2015 (Becomes effective 7/1/16)	All activities or programs undertaken by any applicable entity to achieve a reduction in Demand.
Dial-up Connectivity [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/2016)	A data communication link that is established when the communication equipment dials a phone number and negotiates a connection with the equipment on the other end of the link.
Direct Control Load Management [Archive]	DCLM	2/8/2005	3/16/2007	Demand-Side Management that is under the direct control of the system operator. DCLM may control the electric supply to individual appliances or equipment on customer premises. DCLM as defined here does not include Interruptible Demand.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Dispatch Order [Archive]		08/22/2008	11/24/2009	A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, each generator is ranked by priority.
Dispersed Load by Substations [Archive]		2/8/2005	3/16/2007	Substation load information configured to represent a system for power flow or system dynamics modeling purposes, or both.
Distribution Factor [Archive]	DF	2/8/2005	3/16/2007	The portion of an Interchange Transaction, typically expressed in per unit that flows across a transmission facility (Flowgate).
Distribution Provider [Archive]	DP	2/8/2005	3/16/2007	Provides and operates the “wires” between the transmission system and the end-use customer. For those end-use customers who are served at transmission voltages, the Transmission Owner also serves as the Distribution Provider. Thus, the Distribution Provider is not defined by a specific voltage, but rather as performing the Distribution function at any voltage.
Disturbance [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. An unplanned event that produces an abnormal system condition. 2. Any perturbation to the electric system. 3. The unexpected change in ACE that is caused by the sudden failure of generation or interruption of load.
Disturbance Control Standard [Archive]	DCS	2/8/2005	3/16/2007	The reliability standard that sets the time limit following a Disturbance within which a Balancing Authority must return its Area Control Error to within a specified range.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Disturbance Monitoring Equipment [Archive]	DME	8/2/2006	3/16/2007	<p>Devices capable of monitoring and recording system data pertaining to a Disturbance. Such devices include the following categories of recorders³:</p> <ul style="list-style-type: none"> • Sequence of event recorders which record equipment response to the event • Fault recorders, which record actual waveform data replicating the system primary voltages and currents. This may include protective relays. • Dynamic Disturbance Recorders (DDRs), which record incidents that portray power system behavior during dynamic events such as low-frequency (0.1 Hz – 3 Hz) oscillations and abnormal frequency or voltage excursions
Dynamic Interchange Schedule or Dynamic Schedule [Archive]		2/8/2005	3/16/2007	A telemetered reading or value that is updated in real time and used as a schedule in the AGC/ACE equation and the integrated value of which is treated as a schedule for interchange accounting purposes. Commonly used for scheduling jointly owned generation to or from another Balancing Authority Area.
Dynamic Interchange Schedule or Dynamic Schedule [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	A time-varying energy transfer that is updated in Real-time and included in the Scheduled Net Interchange (NIS) term in the same manner as an Interchange Schedule in the affected Balancing Authorities’ control ACE equations (or alternate control processes).

³ Phasor Measurement Units and any other equipment that meets the functional requirements of DMEs may qualify as DMEs.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Dynamic Transfer [Archive]		2/8/2005	3/16/2007	The provision of the real-time monitoring, telemetering, computer software, hardware, communications, engineering, energy accounting (including inadvertent interchange), and administration required to electronically move all or a portion of the real energy services associated with a generator or load out of one Balancing Authority Area into another.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Economic Dispatch [Archive]		2/8/2005	3/16/2007	The allocation of demand to individual generating units on line to effect the most economical production of electricity.
Electronic Access Control or Monitoring Systems [Archive]	EACMS	11/26/12	11/22/2013 (Becomes effective 4/1/2016)	Cyber Assets that perform electronic access control or electronic access monitoring of the Electronic Security Perimeter(s) or BES Cyber Systems. This includes Intermediate Systems.
Electronic Access Point [Archive]	EAP	11/26/12	11/22/2013 (Becomes effective 4/1/2016)	A Cyber Asset interface on an Electronic Security Perimeter that allows routable communication between Cyber Assets outside an Electronic Security Perimeter and Cyber Assets inside an Electronic Security Perimeter.
Electrical Energy [Archive]		2/8/2005	3/16/2007	The generation or use of electric power by a device over a period of time, expressed in kilowatthours (kWh), megawatthours (MWh), or gigawatthours (GWh).
Electronic Security Perimeter [Archive]	ESP	5/2/2006	1/18/2008 (Becomes inactive 3/31/2016)	The logical border surrounding a network to which Critical Cyber Assets are connected and for which access is controlled.
Electronic Security Perimeter [Archive]	ESP	11/26/12	11/22/2013 (Becomes effective 4/1/2016)	The logical border surrounding a network to which BES Cyber Systems are connected using a routable protocol.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Element [Archive]		2/8/2005	3/16/2007	Any electrical device with terminals that may be connected to other electrical devices such as a generator, transformer, circuit breaker, bus section, or transmission line. An element may be comprised of one or more components.
Emergency or BES Emergency [Archive]		2/8/2005	3/16/2007	Any abnormal system condition that requires automatic or immediate manual action to prevent or limit the failure of transmission facilities or generation supply that could adversely affect the reliability of the Bulk Electric System.
Emergency Rating [Archive]		2/8/2005	3/16/2007	The rating as defined by the equipment owner that specifies the level of electrical loading or output, usually expressed in megawatts (MW) or Mvar or other appropriate units, that a system, facility, or element can support, produce, or withstand for a finite period. The rating assumes acceptable loss of equipment life or other physical or safety limitations for the equipment involved.
Emergency Request for Interchange [Archive]	Emergency RFI	10/29/2008	12/17/2009	Request for Interchange to be initiated for Emergency or Energy Emergency conditions.
Energy Emergency [Archive]		2/8/2005	3/16/2007	A condition when a Load-Serving Entity has exhausted all other options and can no longer provide its customers' expected energy requirements.
Energy Emergency [Archive]		11/13/2014		A condition when a Load-Serving Entity or Balancing Authority has exhausted all other resource options and can no longer meet its expected Load obligations.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Equipment Rating [Archive]		2/7/2006	3/16/2007	The maximum and minimum voltage, current, frequency, real and reactive power flows on individual equipment under steady state, short-circuit and transient conditions, as permitted or assigned by the equipment owner.
External Routable Connectivity [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/2016)	The ability to access a BES Cyber System from a Cyber Asset that is outside of its associated Electronic Security Perimeter via a bi-directional routable protocol connection.
Existing Transmission Commitments [Archive]	ETC	08/22/2008	11/24/2009	Committed uses of a Transmission Service Provider’s Transmission system considered when determining ATC or AFC.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Facility [Archive]		2/7/2006	3/16/2007	A set of electrical equipment that operates as a single Bulk Electric System Element (e.g., a line, a generator, a shunt compensator, transformer, etc.)
Facility Rating [Archive]		2/8/2005	3/16/2007	The maximum or minimum voltage, current, frequency, or real or reactive power flow through a facility that does not violate the applicable equipment rating of any equipment comprising the facility.
Fault [Archive]		2/8/2005	3/16/2007	An event occurring on an electric system such as a short circuit, a broken wire, or an intermittent connection.
Fire Risk [Archive]		2/7/2006	3/16/2007	The likelihood that a fire will ignite or spread in a particular geographic area.
Firm Demand [Archive]		2/8/2005	3/16/2007	That portion of the Demand that a power supplier is obligated to provide except when system reliability is threatened or during emergency conditions.
Firm Transmission Service [Archive]		2/8/2005	3/16/2007	The highest quality (priority) service offered to customers under a filed rate schedule that anticipates no planned interruption.
Flashover [Archive]		2/7/2006	3/16/2007	An electrical discharge through air around or over the surface of insulation, between objects of different potential, caused by placing a voltage across the air space that results in the ionization of the air space.
Flowgate [Archive]		2/8/2005	3/16/2007	A designated point on the transmission system through which the Interchange Distribution Calculator calculates the power flow from Interchange Transactions.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Flowgate [Archive]		08/22/2008	11/24/2009	<p>1.) A portion of the Transmission system through which the Interchange Distribution Calculator calculates the power flow from Interchange Transactions.</p> <p>2.) A mathematical construct, comprised of one or more monitored transmission Facilities and optionally one or more contingency Facilities, used to analyze the impact of power flows upon the Bulk Electric System.</p>
Flowgate Methodology [Archive]		08/22/2008	11/24/2009	The Flowgate methodology is characterized by identification of key Facilities as Flowgates. Total Flowgate Capabilities are determined based on Facility Ratings and voltage and stability limits. The impacts of Existing Transmission Commitments (ETCs) are determined by simulation. The impacts of ETC, Capacity Benefit Margin (CBM) and Transmission Reliability Margin (TRM) are subtracted from the Total Flowgate Capability, and Postbacks and counterflows are added, to determine the Available Flowgate Capability (AFC) value for that Flowgate. AFCs can be used to determine Available Transfer Capability (ATC).
Forced Outage [Archive]		2/8/2005	3/16/2007	<p>1. The removal from service availability of a generating unit, transmission line, or other facility for emergency reasons.</p> <p>2. The condition in which the equipment is unavailable due to unanticipated failure.</p>
Frequency Bias [Archive]		2/8/2005	3/16/2007	A value, usually expressed in megawatts per 0.1 Hertz (MW/0.1 Hz), associated with a Balancing Authority Area that approximates the Balancing Authority Area's response to Interconnection frequency error.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Frequency Bias Setting [Archive]		2/8/2005	3/16/2007 (Becomes inactive 3/31/2015)	A value, usually expressed in MW/0.1 Hz, set into a Balancing Authority ACE algorithm that allows the Balancing Authority to contribute its frequency response to the Interconnection.
Frequency Bias Setting [Archive]		2/7/2013	1/16/2014 (Becomes effective 4/1/2015)	A number, either fixed or variable, usually expressed in MW/0.1 Hz, included in a Balancing Authority's Area Control Error equation to account for the Balancing Authority's inverse Frequency Response contribution to the Interconnection, and discourage response withdrawal through secondary control systems.
Frequency Deviation [Archive]		2/8/2005	3/16/2007	A change in Interconnection frequency.
Frequency Error [Archive]		2/8/2005	3/16/2007	The difference between the actual and scheduled frequency. ($F_A - F_S$)
Frequency Regulation [Archive]		2/8/2005	3/16/2007	The ability of a Balancing Authority to help the Interconnection maintain Scheduled Frequency. This assistance can include both turbine governor response and Automatic Generation Control.
Frequency Response [Archive]		2/8/2005	3/16/2007	(Equipment) The ability of a system or elements of the system to react or respond to a change in system frequency. (System) The sum of the change in demand, plus the change in generation, divided by the change in frequency, expressed in megawatts per 0.1 Hertz (MW/0.1 Hz).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Frequency Response Measure [Archive]	FRM	2/7/2013	1/16/2014 (Becomes effective 4/1/2015)	The median of all the Frequency Response observations reported annually by Balancing Authorities or Frequency Response Sharing Groups for frequency events specified by the ERO. This will be calculated as MW/0.1Hz.
Frequency Response Obligation [Archive]	FRO	2/7/2013	1/16/2014 (Becomes effective 4/1/2015)	The Balancing Authority's share of the required Frequency Response needed for the reliable operation of an Interconnection. This will be calculated as MW/0.1Hz.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Frequency Response Sharing Group [Archive]	FRSG	2/7/2013	1/16/2014 (Becomes effective 4/1/2015)	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating resources required to jointly meet the sum of the Frequency Response Obligations of its members.
Generator Operator [Archive]	GOP	2/8/2005	3/16/2007	The entity that operates generating unit(s) and performs the functions of supplying energy and Interconnected Operations Services.
Generator Owner [Archive]	GO	2/8/2005	3/16/2007	Entity that owns and maintains generating units.
Generator Shift Factor [Archive]	GSF	2/8/2005	3/16/2007	A factor to be applied to a generator’s expected change in output to determine the amount of flow contribution that change in output will impose on an identified transmission facility or Flowgate.
Generator-to-Load Distribution Factor [Archive]	GLDF	2/8/2005	3/16/2007	The algebraic sum of a Generator Shift Factor and a Load Shift Factor to determine the total impact of an Interchange Transaction on an identified transmission facility or Flowgate.
Generation Capability Import Requirement [Archive]	GCIR	11/13/2008	11/24/2009	The amount of generation capability from external sources identified by a Load-Serving Entity (LSE) or Resource Planner (RP) to meet its generation reliability or resource adequacy requirements as an alternative to internal resources.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Host Balancing Authority [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. A Balancing Authority that confirms and implements Interchange Transactions for a Purchasing Selling Entity that operates generation or serves customers directly within the Balancing Authority’s metered boundaries. 2. The Balancing Authority within whose metered boundaries a jointly owned unit is physically located.
Hourly Value [Archive]		2/8/2005	3/16/2007	Data measured on a Clock Hour basis.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Implemented Interchange [Archive]		5/2/2006	3/16/2007	The state where the Balancing Authority enters the Confirmed Interchange into its Area Control Error equation.
Inadvertent Interchange [Archive]		2/8/2005	3/16/2007	The difference between the Balancing Authority's Net Actual Interchange and Net Scheduled Interchange. (I _A - I _S)
Independent Power Producer [Archive]	IPP	2/8/2005	3/16/2007	Any entity that owns or operates an electricity generating facility that is not included in an electric utility's rate base. This term includes, but is not limited to, cogenerators and small power producers and all other nonutility electricity producers, such as exempt wholesale generators, who sell electricity.
Institute of Electrical and Electronics Engineers, Inc. [Archive]	IEEE	2/7/2006	3/16/2007	

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Interactive Remote Access [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/2016)	User-initiated access by a person employing a remote access client or other remote access technology using a routable protocol. Remote access originates from a Cyber Asset that is not an Intermediate System and not located within any of the Responsible Entity’s Electronic Security Perimeter(s) or at a defined Electronic Access Point (EAP). Remote access may be initiated from: 1) Cyber Assets used or owned by the Responsible Entity, 2) Cyber Assets used or owned by employees, and 3) Cyber Assets used or owned by vendors, contractors, or consultants. Interactive remote access does not include system-to-system process communications.
Interchange [Archive]		5/2/2006	3/16/2007	Energy transfers that cross Balancing Authority boundaries.
Interchange Authority [Archive]	IA	5/2/2006	3/16/2007	The responsible entity that authorizes implementation of valid and balanced Interchange Schedules between Balancing Authority Areas, and ensures communication of Interchange information for reliability assessment purposes.
Interchange Distribution Calculator [Archive]	IDC	2/8/2005	3/16/2007	The mechanism used by Reliability Coordinators in the Eastern Interconnection to calculate the distribution of Interchange Transactions over specific Flowgates. It includes a database of all Interchange Transactions and a matrix of the Distribution Factors for the Eastern Interconnection.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Interchange Schedule [Archive]		2/8/2005	3/16/2007	An agreed-upon Interchange Transaction size (megawatts), start and end time, beginning and ending ramp times and rate, and type required for delivery and receipt of power and energy between the Source and Sink Balancing Authorities involved in the transaction.
Interchange Transaction [Archive]		2/8/2005	3/16/2007	An agreement to transfer energy from a seller to a buyer that crosses one or more Balancing Authority Area boundaries.
Interchange Transaction Tag or Tag [Archive]		2/8/2005	3/16/2007	The details of an Interchange Transaction required for its physical implementation.
Interconnected Operations Service [Archive]		2/8/2005	3/16/2007	A service (exclusive of basic energy and transmission services) that is required to support the reliable operation of interconnected Bulk Electric Systems.
Interconnection [Archive]		2/8/2005	3/16/2007 (Retires 6/30/2016)	When capitalized, any one of the three major electric system networks in North America: Eastern, Western, and ERCOT.
Interconnection [Archive]		8/15/2013	4/16/2015 (Effective 7/1/2016)	When capitalized, any one of the four major electric system networks in North America: Eastern, Western, ERCOT and Quebec.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Interconnection Reliability Operating Limit [Archive]	IROL	2/8/2005	3/16/2007 Retired 12/27/2007	The value (such as MW, MVar, Amperes, Frequency or Volts) derived from, or a subset of the System Operating Limits, which if exceeded, could expose a widespread area of the Bulk Electric System to instability, uncontrolled separation(s) or cascading outages.
Interconnection Reliability Operating Limit [Archive]	IROL	11/1/2006	12/27/2007	A System Operating Limit that, if violated, could lead to instability, uncontrolled separation, or Cascading outages ⁴ that adversely impact the reliability of the Bulk Electric System.
Interconnection Reliability Operating Limit T _v [Archive]	IROL T _v	11/1/2006	12/27/2007	The maximum time that an Interconnection Reliability Operating Limit can be violated before the risk to the interconnection or other Reliability Coordinator Area(s) becomes greater than acceptable. Each Interconnection Reliability Operating Limit's T _v shall be less than or equal to 30 minutes.
Intermediate Balancing Authority [Archive]		2/8/2005	3/16/2007	A Balancing Authority Area that has connecting facilities in the Scheduling Path between the Sending Balancing Authority Area and Receiving Balancing Authority Area and operating agreements that establish the conditions for the use of such facilities.
Intermediate Balancing Authority [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	A Balancing Authority on the scheduling path of an Interchange Transaction other than the Source Balancing Authority and Sink Balancing Authority.

⁴ On September 13, 2012, FERC issued an Order approving NERC's request to modify the reference to "Cascading Outages" to "Cascading outages" within the definition of IROL due to the fact that the definition of "Cascading Outages" was previously remanded by FERC.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Intermediate System [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/2016)	A Cyber Asset or collection of Cyber Assets performing access control to restrict Interactive Remote Access to only authorized users. The Intermediate System must not be located inside the Electronic Security Perimeter.
Interpersonal Communication [Archive]		11/7/2012	4/16/2015 (Becomes effective 10/1/2015)	Any medium that allows two or more individuals to interact, consult, or exchange information.
Interruptible Load or Interruptible Demand [Archive]		11/1/2006	3/16/2007	Demand that the end-use customer makes available to its Load-Serving Entity via contract or agreement for curtailment.
Joint Control [Archive]		2/8/2005	3/16/2007	Automatic Generation Control of jointly owned units by two or more Balancing Authorities.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Limiting Element [Archive]		2/8/2005	3/16/2007	The element that is 1.)Either operating at its appropriate rating, or 2,) Would be following the limiting contingency. Thus, the Limiting Element establishes a system limit.
Load [Archive]		2/8/2005	3/16/2007	An end-use device or customer that receives power from the electric system.
Load Shift Factor [Archive]	LSF	2/8/2005	3/16/2007	A factor to be applied to a load’s expected change in demand to determine the amount of flow contribution that change in demand will impose on an identified transmission facility or monitored Flowgate.
Load-Serving Entity [Archive]	LSE	2/8/2005	3/16/2007	Secures energy and transmission service (and related Interconnected Operations Services) to serve the electrical demand and energy requirements of its end-use customers.
Long-Term Transmission Planning Horizon [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/2015)	Transmission planning period that covers years six through ten or beyond when required to accommodate any known longer lead time projects that may take longer than ten years to complete.
Low Impact BES Cyber System Electronic Access Point [Archive]	LEAP	2/12/2015		A Cyber Asset interface that controls Low Impact External Routable Connectivity. The Cyber Asset containing the LEAP may reside at a location external to the asset or assets containing low impact BES Cyber Systems.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Low Impact External Routable Connectivity [Archive]	LERC	2/12/2015		Direct user-initiated interactive access or a direct device-to-device connection to a low impact BES Cyber System(s) from a Cyber Asset outside the asset containing those low impact BES Cyber System(s) via a bi-directional routable protocol connection. Point-to-point communications between intelligent electronic devices that use routable communication protocols for time-sensitive protection or control functions between Transmission station or substation assets containing low impact BES Cyber Systems are excluded from this definition (examples of this communication include, but are not limited to, IEC 61850 GOOSE or vendor proprietary protocols).
Market Flow [Archive]		11/4/2010	4/21/2011	The total amount of power flowing across a specified Facility or set of Facilities due to a market dispatch of generation internal to the market to serve load internal to the market.
Minimum Vegetation Clearance Distance [Archive]	MVCD	11/3/2011	3/21/2013 (Becomes effective 7/1/14)	The calculated minimum distance stated in feet (meters) to prevent flash-over between conductors and vegetation, for various altitudes and operating voltages.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Misoperation [Archive]		2/7/2006	3/16/2007	<ul style="list-style-type: none"> Any failure of a Protection System element to operate within the specified time when a fault or abnormal condition occurs within a zone of protection. Any operation for a fault not within a zone of protection (other than operation as backup protection for a fault in an adjacent zone that is not cleared within a specified time for the protection for that zone). Any unintentional Protection System operation when no fault or other abnormal condition has occurred unrelated to on-site maintenance and testing activity.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Misoperation [Archive]		8/14/2014		<p>The failure of a Composite Protection System to operate as intended for protection purposes. Any of the following is a Misoperation:</p> <ol style="list-style-type: none"> 1. Failure to Trip – During Fault – A failure of a Composite Protection System to operate for a Fault condition for which it is designed. The failure of a Protection System component is not a Misoperation as long as the performance of the Composite Protection System is correct. 2. Failure to Trip – Other Than Fault – A failure of a Composite Protection System to operate for a non-Fault condition for which it is designed, such as a power swing, undervoltage, overexcitation, or loss of excitation. The failure of a Protection System component is not a Misoperation as long as the performance of the Composite Protection System is correct. 3. Slow Trip – During Fault – A Composite Protection System operation that is slower than required for a Fault condition if the duration of its operating time resulted in the operation of at least one other Element’s Composite Protection System. <p><i>(continued below)</i></p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
<p>Continued... Misoperation [Archive]</p>		8/14/2014		<p>4. Slow Trip – Other Than Fault – A Composite Protection System operation that is slower than required for a non-Fault condition, such as a power swing, undervoltage, overexcitation, or loss of excitation, if the duration of its operating time resulted in the operation of at least one other Element’s Composite Protection System.</p> <p>5. Unnecessary Trip – During Fault – An unnecessary Composite Protection System operation for a Fault condition on another Element.</p> <p>6. Unnecessary Trip – Other Than Fault – An unnecessary Composite Protection System operation for a non-Fault condition. A Composite Protection System operation that is caused by personnel during on-site maintenance, testing, inspection, construction, or commissioning activities is not a Misoperation.</p>
<p>Native Balancing Authority [Archive]</p>		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	<p>A Balancing Authority from which a portion of its physically interconnected generation and/or load is transferred from its effective control boundaries to the Attaining Balancing Authority through a Dynamic Transfer.</p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Native Load [Archive]		2/8/2005	3/16/2007	The end-use customers that the Load-Serving Entity is obligated to serve.
Near-Term Transmission Planning Horizon [Archive]		1/24/2011	11/17/2011	The transmission planning period that covers Year One through five.
Net Actual Interchange [Archive]		2/8/2005	3/16/2007	The algebraic sum of all metered interchange over all interconnections between two physically Adjacent Balancing Authority Areas.
Net Energy for Load [Archive]		2/8/2005	3/16/2007	Net Balancing Authority Area generation, plus energy received from other Balancing Authority Areas, less energy delivered to Balancing Authority Areas through interchange. It includes Balancing Authority Area losses but excludes energy required for storage at energy storage facilities.
Net Interchange Schedule [Archive]		2/8/2005	3/16/2007	The algebraic sum of all Interchange Schedules with each Adjacent Balancing Authority.
Net Scheduled Interchange [Archive]		2/8/2005	3/16/2007	The algebraic sum of all Interchange Schedules across a given path or between Balancing Authorities for a given period or instant in time.
Network Integration Transmission Service [Archive]		2/8/2005	3/16/2007	Service that allows an electric transmission customer to integrate, plan, economically dispatch and regulate its network reserves in a manner comparable to that in which the Transmission Owner serves Native Load customers.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Non-Consequential Load Loss [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/15)	Non-Interruptible Load loss that does not include: (1) Consequential Load Loss, (2) the response of voltage sensitive Load, or (3) Load that is disconnected from the System by end-user equipment.
Non-Firm Transmission Service [Archive]		2/8/2005	3/16/2007	Transmission service that is reserved on an as-available basis and is subject to curtailment or interruption.
Non-Spinning Reserve [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. That generating reserve not connected to the system but capable of serving demand within a specified time. 2. Interruptible load that can be removed from the system in a specified time.
Normal Clearing [Archive]		11/1/2006	12/27/2007	A protection system operates as designed and the fault is cleared in the time normally expected with proper functioning of the installed protection systems.
Normal Rating [Archive]		2/8/2005	3/16/2007	The rating as defined by the equipment owner that specifies the level of electrical loading, usually expressed in megawatts (MW) or other appropriate units that a system, facility, or element can support or withstand through the daily demand cycles without loss of equipment life.
Nuclear Plant Generator Operator [Archive]		5/2/2007	10/16/2008	Any Generator Operator or Generator Owner that is a Nuclear Plant Licensee responsible for operation of a nuclear facility licensed to produce commercial power.
Nuclear Plant Off-site Power Supply (Off-site Power) [Archive]		5/2/2007	10/16/2008	The electric power supply provided from the electric system to the nuclear power plant distribution system as required per the nuclear power plant license.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Nuclear Plant Licensing Requirements [Archive]	NPLRs	5/2/2007	10/16/2008	Requirements included in the design basis of the nuclear plant and statutorily mandated for the operation of the plant, including nuclear power plant licensing requirements for: 1) Off-site power supply to enable safe shutdown of the plant during an electric system or plant event; and 2) Avoiding preventable challenges to nuclear safety as a result of an electric system disturbance, transient, or condition.
Nuclear Plant Interface Requirements [Archive]	NPIRs	5/2/2007	10/16/2008	The requirements based on NPLRs and Bulk Electric System requirements that have been mutually agreed to by the Nuclear Plant Generator Operator and the applicable Transmission Entities.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Off-Peak [Archive]		2/8/2005	3/16/2007	Those hours or other periods defined by NAESB business practices, contract, agreements, or guides as periods of lower electrical demand.
On-Peak [Archive]		2/8/2005	3/16/2007	Those hours or other periods defined by NAESB business practices, contract, agreements, or guides as periods of higher electrical demand.
Open Access Same Time Information Service [Archive]	OASIS	2/8/2005	3/16/2007	An electronic posting system that the Transmission Service Provider maintains for transmission access data and that allows all transmission customers to view the data simultaneously.
Open Access Transmission Tariff [Archive]	OATT	2/8/2005	3/16/2007	Electronic transmission tariff accepted by the U.S. Federal Energy Regulatory Commission requiring the Transmission Service Provider to furnish to all shippers with non-discriminating service comparable to that provided by Transmission Owners to themselves.
Operating Instruction [Archive]		5/6/2014	4/16/2015 (Becomes effective 7/1/2016)	A command by operating personnel responsible for the Real-time operation of the interconnected Bulk Electric System to change or preserve the state, status, output, or input of an Element of the Bulk Electric System or Facility of the Bulk Electric System. (A discussion of general information and of potential options or alternatives to resolve Bulk Electric System operating concerns is not a command and is not considered an Operating Instruction.)

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Operating Plan [Archive]		2/7/2006	3/16/2007	A document that identifies a group of activities that may be used to achieve some goal. An Operating Plan may contain Operating Procedures and Operating Processes. A company-specific system restoration plan that includes an Operating Procedure for black-starting units, Operating Processes for communicating restoration progress with other entities, etc., is an example of an Operating Plan.
Operating Procedure [Archive]		2/7/2006	3/16/2007	A document that identifies specific steps or tasks that should be taken by one or more specific operating positions to achieve specific operating goal(s). The steps in an Operating Procedure should be followed in the order in which they are presented, and should be performed by the position(s) identified. A document that lists the specific steps for a system operator to take in removing a specific transmission line from service is an example of an Operating Procedure.
Operating Process [Archive]		2/7/2006	3/16/2007	A document that identifies general steps for achieving a generic operating goal. An Operating Process includes steps with options that may be selected depending upon Real-time conditions. A guideline for controlling high voltage is an example of an Operating Process.
Operating Reserve [Archive]		2/8/2005	3/16/2007	That capability above firm system demand required to provide for regulation, load forecasting error, equipment forced and scheduled outages and local area protection. It consists of spinning and non-spinning reserve.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Operating Reserve – Spinning [Archive]		2/8/2005	3/16/2007	The portion of Operating Reserve consisting of: <ul style="list-style-type: none"> • Generation synchronized to the system and fully available to serve load within the Disturbance Recovery Period following the contingency event; or • Load fully removable from the system within the Disturbance Recovery Period following the contingency event.
Operating Reserve – Supplemental [Archive]		2/8/2005	3/16/2007	The portion of Operating Reserve consisting of: <ul style="list-style-type: none"> • Generation (synchronized or capable of being synchronized to the system) that is fully available to serve load within the Disturbance Recovery Period following the contingency event; or • Load fully removable from the system within the Disturbance Recovery Period following the contingency event.
Operating Voltage [Archive]		2/7/2006	3/16/2007	The voltage level by which an electrical system is designated and to which certain operating characteristics of the system are related; also, the effective (root-mean-square) potential difference between any two conductors or between a conductor and the ground. The actual voltage of the circuit may vary somewhat above or below this value.
Operational Planning Analysis [Archive]		10/17/2008	3/17/2011	An analysis of the expected system conditions for the next day’s operation. (That analysis may be performed either a day ahead or as much as 12 months ahead.) Expected system conditions include things such as load forecast(s), generation output levels, and known system constraints (transmission facility outages, generator outages, equipment limitations, etc.).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Operational Planning Analysis [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	An analysis of the expected system conditions for the next day's operation. (That analysis may be performed either a day ahead or as much as 12 months ahead.) Expected system conditions include things such as load forecast(s), generation output levels, Interchange, and known system constraints (transmission facility outages, generator outages, equipment limitations, etc.).
Operational Planning Analysis [Archive]		11/13/2014		An evaluation of projected system conditions to assess anticipated (pre-Contingency) and potential (post-Contingency) conditions for next-day operations. The evaluation shall reflect applicable inputs including, but not limited to, load forecasts; generation output levels; Interchange; known Protection System and Special Protection System status or degradation; Transmission outages; generator outages; Facility Ratings; and identified phase angle and equipment limitations. (Operational Planning Analysis may be provided through internal systems or through third-party services.)
Operations Support Personnel [Archive]		2/6/2014	6/19/2014 (effective 7/1/2016)	Individuals who perform current day or next day outage coordination or assessments, or who determine SOLs, IROLs, or operating nomograms, ¹ in direct support of Real-time operations of the Bulk Electric System.
Outage Transfer Distribution Factor [Archive]	OTDF	8/22/2008	11/24/2009	In the post-contingency configuration of a system under study, the electric Power Transfer Distribution Factor (PTDF) with one or more system Facilities removed from service (outaged).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Overlap Regulation Service [Archive]		2/8/2005	3/16/2007	A method of providing regulation service in which the Balancing Authority providing the regulation service incorporates another Balancing Authority's actual interchange, frequency response, and schedules into providing Balancing Authority's AGC/ACE equation.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Participation Factors [Archive]		8/22/2008	11/24/2009	A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, generators are assigned a percentage that they will contribute to serve load.
Peak Demand [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. The highest hourly integrated Net Energy For Load within a Balancing Authority Area occurring within a given period (e.g., day, month, season, or year). 2. The highest instantaneous demand within the Balancing Authority Area.
Performance-Reset Period [Archive]		2/7/2006	3/16/2007	The time period that the entity being assessed must operate without any violations to reset the level of non compliance to zero.
Physical Access Control Systems [Archive]	PACS	11/26/12	11/22/2013 (Becomes effective 4/1/16)	Cyber Assets that control, alert, or log access to the Physical Security Perimeter(s), exclusive of locally mounted hardware or devices at the Physical Security Perimeter such as motion sensors, electronic lock control mechanisms, and badge readers.
Physical Security Perimeter [Archive]	PSP	5/2/2006	1/18/2008 (Becomes inactive 3/31/16)	The physical, completely enclosed (“six-wall”) border surrounding computer rooms, telecommunications rooms, operations centers, and other locations in which Critical Cyber Assets are housed and for which access is controlled.
Physical Security Perimeter [Archive]	PSP	11/26/12	11/22/2013 (Becomes effective 4/1/16)	The physical border surrounding locations in which BES Cyber Assets, BES Cyber Systems, or Electronic Access Control or Monitoring Systems reside, and for which access is controlled.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Planning Assessment [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/15)	Documented evaluation of future Transmission System performance and Corrective Action Plans to remedy identified deficiencies.
Planning Authority [Archive]	PA	2/8/2005	3/16/2007	The responsible entity that coordinates and integrates transmission facility and service plans, resource plans, and protection systems.
Planning Coordinator [Archive]	PC	8/22/2008	11/24/2009	See Planning Authority.
Point of Delivery [Archive]	POD	2/8/2005	3/16/2007	A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction leaves or a Load-Serving Entity receives its energy.
Point of Receipt [Archive]	POR	2/8/2005	3/16/2007	A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction enters or a Generator delivers its output.
Point to Point Transmission Service [Archive]	PTP	2/8/2005	3/16/2007	The reservation and transmission of capacity and energy on either a firm or non-firm basis from the Point(s) of Receipt to the Point(s) of Delivery.
Postback [Archive]		08/22/2008	Not approved; Modification directed 11/24/09	Positive adjustments to ATC or AFC as defined in Business Practices. Such Business Practices may include processing of redirects and unscheduled service.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Power Transfer Distribution Factor [Archive]	PTDF	08/22/2008	11/24/2009	In the pre-contingency configuration of a system under study, a measure of the responsiveness or change in electrical loadings on transmission system Facilities due to a change in electric power transfer from one area to another, expressed in percent (up to 100%) of the change in power transfer
Pro Forma Tariff [Archive]		2/8/2005	3/16/2007	Usually refers to the standard OATT and/or associated transmission rights mandated by the U.S. Federal Energy Regulatory Commission Order No. 888.
Protected Cyber Assets [Archive]	PCA	11/26/2012	11/22/2013 (Becomes effective 4/1/16)	One or more Cyber Assets connected using a routable protocol within or on an Electronic Security Perimeter that is not part of the highest impact BES Cyber System within the same Electronic Security Perimeter. The impact rating of Protected Cyber Assets is equal to the highest rated BES Cyber System in the same ESP. A Cyber Asset is not a Protected Cyber Asset if, for 30 consecutive calendar days or less, it is connected either to a Cyber Asset within the ESP or to the network within the ESP, and it is used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.
Protected Cyber Assets [Archive]	PCA	2/12/2015		One or more Cyber Assets connected using a routable protocol within or on an Electronic Security Perimeter that is not part of the highest impact BES Cyber System within the same Electronic Security Perimeter. The impact rating of Protected Cyber Assets is equal to the highest rated BES Cyber System in the same ESP.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Protection System [Archive]		2/7/2006	3/17/2007 retired 4/1/2013	Protective relays, associated communication systems, voltage and current sensing devices, station batteries and DC control circuitry.
Protection System [Archive] [Implementation Plan]		11/19/2010	2/3/2012 (Became effective on 4/1/13)	Protection System – <ul style="list-style-type: none"> • Protective relays which respond to electrical quantities, • Communications systems necessary for correct operation of protective functions • Voltage and current sensing devices providing inputs to protective relays, • Station dc supply associated with protective functions (including station batteries, battery chargers, and non-battery-based dc supply), and • Control circuitry associated with protective functions through the trip coil(s) of the circuit breakers or other interrupting devices.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Protection System Maintenance Program (PRC-005-2) [Archive]	PSMP	11/7/2012	12/19/2013 (Becomes effective 4/1/2015)	An ongoing program by which Protection System components are kept in working order and proper operation of malfunctioning components is restored. A maintenance program for a specific component includes one or more of the following activities: Verify — Determine that the component is functioning correctly. Monitor — Observe the routine in-service operation of the component. Test — Apply signals to a component to observe functional performance or output behavior, or to diagnose problems. Inspect — Examine for signs of component failure, reduced performance or degradation. Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Protection System Maintenance Program (PRC-005-3) [Archive]	PSMP	11/7/2013	1/22/2015 (Becomes effective 4/1/2016)	An ongoing program by which Protection System and automatic reclosing components are kept in working order and proper operation of malfunctioning components is restored. A maintenance program for a specific component includes one or more of the following activities: Verify — Determine that the component is functioning correctly. Monitor — Observe the routine in-service operation of the component. Test — Apply signals to a component to observe functional performance or output behavior, or to diagnose problems. Inspect — Examine for signs of component failure, reduced performance or degradation. Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Protection System Maintenance Program (PRC-005-4) [Archive]	PSMP	11/13/2014		An ongoing program by which Protection System, Automatic Reclosing, and Sudden Pressure Relaying Components are kept in working order and proper operation of malfunctioning Components is restored. A maintenance program for a specific Component includes one or more of the following activities: <ul style="list-style-type: none"> • Verify — Determine that the Component is functioning correctly. • Monitor — Observe the routine in-service operation of the Component. • Test — Apply signals to a Component to observe functional performance or output behavior, or to diagnose problems. • Inspect — Examine for signs of Component failure, reduced performance or degradation. • Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.
Pseudo-Tie [Archive]		2/8/2005	3/16/2007	A telemetered reading or value that is updated in real time and used as a “virtual” tie line flow in the AGC/ACE equation but for which no physical tie or energy metering actually exists. The integrated value is used as a metered MWh value for interchange accounting purposes.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Pseudo-Tie [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	A time-varying energy transfer that is updated in Real-time and included in the Actual Net Interchange term (NIA) in the same manner as a Tie Line in the affected Balancing Authorities' control ACE equations (or alternate control processes).
Purchasing-Selling Entity [Archive]	PSE	2/8/2005	3/16/2007	The entity that purchases or sells, and takes title to, energy, capacity, and Interconnected Operations Services. Purchasing-Selling Entities may be affiliated or unaffiliated merchants and may or may not own generating facilities.
Ramp Rate or Ramp [Archive]		2/8/2005	3/16/2007	(Schedule) The rate, expressed in megawatts per minute, at which the interchange schedule is attained during the ramp period. (Generator) The rate, expressed in megawatts per minute, that a generator changes its output.
Rated Electrical Operating Conditions [Archive]		2/7/2006	3/16/2007	The specified or reasonably anticipated conditions under which the electrical system or an individual electrical circuit is intend/designed to operate
Rating [Archive]		2/8/2005	3/16/2007	The operational limits of a transmission system element under a set of specified conditions.
Rated System Path Methodology [Archive]		08/22/2008	11/24/2009	The Rated System Path Methodology is characterized by an initial Total Transfer Capability (TTC), determined via simulation. Capacity Benefit Margin, Transmission Reliability Margin, and Existing Transmission Commitments are subtracted from TTC, and Postbacks and counterflows are added as applicable, to derive Available Transfer Capability. Under the Rated System Path Methodology, TTC results are generally reported as specific transmission path capabilities.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reactive Power [Archive]		2/8/2005	3/16/2007	The portion of electricity that establishes and sustains the electric and magnetic fields of alternating-current equipment. Reactive power must be supplied to most types of magnetic equipment, such as motors and transformers. It also must supply the reactive losses on transmission facilities. Reactive power is provided by generators, synchronous condensers, or electrostatic equipment such as capacitors and directly influences electric system voltage. It is usually expressed in kilovars (kvar) or megavars (Mvar).
Real Power [Archive]		2/8/2005	3/16/2007	The portion of electricity that supplies energy to the load.
Reallocation [Archive]		2/8/2005	3/16/2007	The total or partial curtailment of Transactions during TLR Level 3a or 5a to allow Transactions using higher priority to be implemented.
Real-time [Archive]		2/7/2006	3/16/2007	Present time as opposed to future time. (From Interconnection Reliability Operating Limits standard.)
Real-time Assessment [Archive]		10/17/2008	3/17/2011	An examination of existing and expected system conditions, conducted by collecting and reviewing immediately available data

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Real-time Assessment [Archive]		11/13/2014	Revised definition	An evaluation of system conditions using Real-time data to assess existing (pre-Contingency) and potential (post-Contingency) operating conditions. The assessment shall reflect applicable inputs including, but not limited to: load, generation output levels, known Protection System and Special Protection System status or degradation, Transmission outages, generator outages, Interchange, Facility Ratings, and identified phase angle and equipment limitations. (Real-time Assessment may be provided through internal systems or through third-party services.)
Receiving Balancing Authority [Archive]		2/8/2005	3/16/2007	The Balancing Authority importing the Interchange.
Regional Reliability Organization [Archive]	RRO	2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. An entity that ensures that a defined area of the Bulk Electric System is reliable, adequate and secure. 2. A member of the North American Electric Reliability Council. The Regional Reliability Organization can serve as the Compliance Monitor.
Regional Reliability Plan [Archive]		2/8/2005	3/16/2007	The plan that specifies the Reliability Coordinators and Balancing Authorities within the Regional Reliability Organization, and explains how reliability coordination will be accomplished.
Regulating Reserve [Archive]		2/8/2005	3/16/2007	An amount of reserve responsive to Automatic Generation Control, which is sufficient to provide normal regulating margin.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Regulation Reserve Sharing Group [Archive]		8/15/2013	4/16/2015 (Becomes effective 7/1/2016)	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply the Regulating Reserve required for all member Balancing Authorities to use in meeting applicable regulating standards.
Regulation Service [Archive]		2/8/2005	3/16/2007	The process whereby one Balancing Authority contracts to provide corrective response to all or a portion of the ACE of another Balancing Authority. The Balancing Authority providing the response assumes the obligation of meeting all applicable control criteria as specified by NERC for itself and the Balancing Authority for which it is providing the Regulation Service.
Reliability Adjustment Arranged Interchange [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	A request to modify a Confirmed Interchange or Implemented Interchange for reliability purposes.
Reliability Adjustment RFI [Archive]		10/29/2008	12/17/2009	Request to modify an Implemented Interchange Schedule for reliability purposes.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reliability Coordinator [Archive]	RC	2/8/2005	3/16/2007	The entity that is the highest level of authority who is responsible for the reliable operation of the Bulk Electric System, has the Wide Area view of the Bulk Electric System, and has the operating tools, processes and procedures, including the authority to prevent or mitigate emergency operating situations in both next-day analysis and real-time operations. The Reliability Coordinator has the purview that is broad enough to enable the calculation of Interconnection Reliability Operating Limits, which may be based on the operating parameters of transmission systems beyond any Transmission Operator’s vision.
Reliability Coordinator Area [Archive]		2/8/2005	3/16/2007	The collection of generation, transmission, and loads within the boundaries of the Reliability Coordinator. Its boundary coincides with one or more Balancing Authority Areas.
Reliability Coordinator Information System [Archive]	RCIS	2/8/2005	3/16/2007	The system that Reliability Coordinators use to post messages and share operating information in real time.
Reliability Directive [Archive]		8/16/2012		A communication initiated by a Reliability Coordinator, Transmission Operator, or Balancing Authority where action by the recipient is necessary to address an Emergency or Adverse Reliability Impact.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reliability Standard [Archive]		5/9/2013	7/9/2013	A requirement, approved by the United States Federal Energy Regulatory Commission under this Section 215 of the Federal Power Act, or approved or recognized by an applicable governmental authority in other jurisdictions, to provide for reliable operation [Reliable Operation] of the bulk-power system [Bulk-Power System]. The term includes requirements for the operation of existing bulk-power system [Bulk-Power System] facilities, including cybersecurity protection, and the design of planned additions or modifications to such facilities to the extent necessary to provide for reliable operation [Reliable Operation] of the bulk-power system [Bulk-Power System], but the term does not include any requirement to enlarge such facilities or to construct new transmission capacity or generation capacity.
Reliable Operation [Archive]		5/9/2013	7/9/2013	Operating the elements of the bulk-power system [Bulk-Power System] within equipment and electric system thermal, voltage, and stability limits so that instability, uncontrolled separation, or cascading failures of such system will not occur as a result of a sudden disturbance, including a cybersecurity incident, or unanticipated failure of system elements.
Remedial Action Scheme [Archive]	RAS	2/8/2005	3/16/2007	See "Special Protection System"

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Remedial Action Scheme [Archive]	RAS	11/13/2014		<p>A scheme designed to detect predetermined System conditions and automatically take corrective actions that may include, but are not limited to, adjusting or tripping generation (MW and Mvar), tripping load, or reconfiguring a System(s). RAS accomplish objectives such as:</p> <ul style="list-style-type: none"> • Meet requirements identified in the NERC Reliability Standards; • Maintain Bulk Electric System (BES) stability; • Maintain acceptable BES voltages; • Maintain acceptable BES power flows; • Limit the impact of Cascading or extreme events. <p>The following do not individually constitute a RAS:</p> <ol style="list-style-type: none"> a. Protection Systems installed for the purpose of detecting Faults on BES Elements and isolating the faulted Elements b. Schemes for automatic underfrequency load shedding (UFLS) and automatic undervoltage load shedding (UVLS) comprised of only distributed relays c. Out-of-step tripping and power swing blocking d. Automatic reclosing schemes e. Schemes applied on an Element for non-Fault conditions, such as, but not limited to, generator loss-of-field, transformer top-oil temperature, overvoltage, or overload to protect the Element against damage by removing it from service

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
<p>Continued Remedial Action Scheme [Archive]</p>				<ul style="list-style-type: none"> f. Controllers that switch or regulate one or more of the following: series or shunt reactive devices, flexible alternating current transmission system (FACTS) devices, phase-shifting transformers, variable-frequency transformers, or tap-changing transformers; and, that are located at and monitor quantities solely at the same station as the Element being switched or regulated g. FACTS controllers that remotely switch static shunt reactive devices located at other stations to regulate the output of a single FACTS device h. Schemes or controllers that remotely switch shunt reactors and shunt capacitors for voltage regulation that would otherwise be manually switched i. Schemes that automatically de-energize a line for a non-Fault operation when one end of the line is open j. Schemes that provide anti-islanding protection (e.g., protect load from effects of being isolated with generation that may not be capable of maintaining acceptable frequency and voltage) k. Automatic sequences that proceed when manually initiated solely by a System Operator l. Modulation of HVdc or FACTS via supplementary controls, such as angle damping or frequency damping applied to damp local or inter-area oscillations m. Sub-synchronous resonance (SSR) protection schemes that directly detect sub-synchronous quantities (e.g., currents or torsional oscillations)

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Continued Remedial Action Scheme [Archive]				n. Generator controls such as, but not limited to, automatic generation control (AGC), generation excitation [e.g. automatic voltage regulation (AVR) and power system stabilizers (PSS)], fast valving, and speed governing
Removable Media [Archive]		2/12/2015		Storage media that (i) are not Cyber Assets, (ii) are capable of transferring executable code, (iii) can be used to store, copy, move, or access data, and (iv) are directly connected for 30 consecutive calendar days or less to a BES Cyber Asset, a network within an ESP, or a Protected Cyber Asset. Examples include, but are not limited to, floppy disks, compact disks, USB flash drives, external hard drives, and other flash memory cards/drives that contain nonvolatile memory.
Reportable Cyber Security Incident [Archive]		11/26/2012	11/22/2013 (Becomes effective 4/1/16)	A Cyber Security Incident that has compromised or disrupted one or more reliability tasks of a functional entity.
Reportable Disturbance [Archive]		2/8/2005	3/16/2007	Any event that causes an ACE change greater than or equal to 80% of a Balancing Authority's or reserve sharing group's most severe contingency. The definition of a reportable disturbance is specified by each Regional Reliability Organization. This definition may not be retroactively adjusted in response to observed performance.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reporting ACE [Archive]		8/15/2013	4/16/2015 (Becomes effective 7/1/2016)	<p>The scan rate values of a Balancing Authority’s Area Control Error (ACE) measured in MW, which includes the difference between the Balancing Authority’s Net Actual Interchange and its Net Scheduled Interchange, plus its Frequency Bias obligation, plus any known meter error. In the Western Interconnection, Reporting ACE includes Automatic Time Error Correction (ATEC).</p> <p>Reporting ACE is calculated as follows:</p> $\text{Reporting ACE} = (\text{NI}_A - \text{NI}_S) - 10B (F_A - F_S) - I_{ME}$ <p>Reporting ACE is calculated in the Western Interconnection as follows:</p> $\text{Reporting ACE} = (\text{NI}_A - \text{NI}_S) - 10B (F_A - F_S) - I_{ME} + I_{ATEC}$ <p>Where:</p> <p>NI_A (Actual Net Interchange) is the algebraic sum of actual megawatt transfers across all Tie Lines and includes Pseudo-Ties. Balancing Authorities directly connected via asynchronous ties to another Interconnection may include or exclude megawatt transfers on those Tie lines in their actual interchange, provided they are implemented in the same manner for Net Interchange Schedule.</p> <p>NI_S (Scheduled Net Interchange) is the algebraic sum of all scheduled megawatt transfers, including Dynamic Schedules, with adjacent Balancing Authorities, and taking into account the effects of schedule ramps. Balancing Authorities directly connected via asynchronous ties to another Interconnection may include or exclude megawatt transfers on those Tie Lines in their scheduled Interchange, provided they are implemented in the same manner for Net</p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reporting ACE (Continued)				<p>Interchange Actual.</p> <p>B (Frequency Bias Setting) is the Frequency Bias Setting (in negative MW/0.1 Hz) for the Balancing Authority.</p> <p>10 is the constant factor that converts the frequency bias setting units to MW/Hz.</p> <p>F_A (Actual Frequency) is the measured frequency in Hz.</p> <p>F_S (Scheduled Frequency) is 60.0 Hz, except during a time correction.</p> <p>I_{ME} (Interchange Meter Error) is the meter error correction factor and represents the difference between the integrated hourly average of the net interchange actual (NIA) and the cumulative hourly net Interchange energy measurement (in megawatt-hours).</p> <p>I_{A TEC} (Automatic Time Error Correction) is the addition of a component to the ACE equation for the Western Interconnection that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error. Automatic Time Error Correction is only applicable in the Western Interconnection.</p> $I_{ATEC} = \frac{PII_{accum}^{on/off\ peak}}{(1-Y)^*H} \text{ when operating in Automatic Time Error Correction control mode.}$ <p>I_{A TEC} shall be zero when operating in any other AGC mode.</p> <ul style="list-style-type: none"> • Y = B / BS. • H = Number of hours used to payback Primary Inadvertent Interchange energy. The value of H is set to 3. • BS = Frequency Bias for the Interconnection (MW / 0.1 Hz).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reporting ACE (Continued)				<ul style="list-style-type: none"> Primary Inadvertent Interchange (PII_{hourly}) is $(1-Y) * (II_{actual} - B * \Delta TE/6)$ II_{actual} is the hourly Inadvertent Interchange for the last hour. ΔTE is the hourly change in system Time Error as distributed by the Interconnection Time Monitor. Where: $\Delta TE = TE_{end\ hour} - TE_{begin\ hour} - TD_{adj} - (t) * (TE_{offset})$ TD_{adj} is the Reliability Coordinator adjustment for differences with Interconnection Time Monitor control center clocks. t is the number of minutes of Manual Time Error Correction that occurred during the hour. TE_{offset} is 0.000 or +0.020 or -0.020. PII_{accum} is the Balancing Authority's accumulated PII_{hourly} in MWh. An On-Peak and Off-Peak accumulation accounting is required. <p>Where:</p> $PII_{accum}^{on/off\ peak} = \text{last period's } PII_{accum}^{on/off\ peak} + PII_{hourly}$ <p>All NERC Interconnections with multiple Balancing Authorities operate using the principles of Tie-line Bias (TLB) Control and require the use of an ACE equation similar to the Reporting ACE defined above. Any modification(s) to this specified Reporting ACE equation that is(are) implemented for all BAs on an Interconnection and is(are) consistent with the following four principles will provide a valid alternative Reporting ACE equation</p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reporting ACE (Continued)				consistent with the measures included in this standard. <ol style="list-style-type: none"> 1. All portions of the Interconnection are included in one area or another so that the sum of all area generation, loads and losses is the same as total system generation, load and losses. 2. The algebraic sum of all area Net Interchange Schedules and all Net Interchange actual values is equal to zero at all times. 3. The use of a common Scheduled Frequency FS for all areas at all times. 4. The absence of metering or computational errors. (The inclusion and use of the IME term to account for known metering or computational errors.)
Request for Interchange [Archive]	RFI	5/2/2006	3/16/2007	A collection of data as defined in the NAESB RFI Datasheet, to be submitted to the Interchange Authority for the purpose of implementing bilateral Interchange between a Source and Sink Balancing Authority.
Request for Interchange [Archive]	RFI	2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	A collection of data as defined in the NAESB Business Practice Standards submitted for the purpose of implementing bilateral Interchange between Balancing Authorities or an energy transfer within a single Balancing Authority.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reserve Sharing Group [Archive]	RSG	2/8/2005	3/16/2007	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating reserves required for each Balancing Authority's use in recovering from contingencies within the group. Scheduling energy from an Adjacent Balancing Authority to aid recovery need not constitute reserve sharing provided the transaction is ramped in over a period the supplying party could reasonably be expected to load generation in (e.g., ten minutes). If the transaction is ramped in quicker (e.g., between zero and ten minutes) then, for the purposes of Disturbance Control Performance, the Areas become a Reserve Sharing Group.
Reserve Sharing Group Reporting ACE [Archive]		8/15/2013	4/16/2015 (Becomes effective 7/1/2016)	At any given time of measurement for the applicable Reserve Sharing Group, the algebraic sum of the Reporting ACEs (or equivalent as calculated at such time of measurement) of the Balancing Authorities participating in the Reserve Sharing Group at the time of measurement.
Resource Planner [Archive]	RP	2/8/2005	3/16/2007	The entity that develops a long-term (generally one year and beyond) plan for the resource adequacy of specific loads (customer demand and energy requirements) within a Planning Authority Area.
Response Rate [Archive]		2/8/2005	3/16/2007	The Ramp Rate that a generating unit can achieve under normal operating conditions expressed in megawatts per minute (MW/Min).
Right-of-Way [Archive]	ROW	2/7/2006	3/16/2007	A corridor of land on which electric lines may be located. The Transmission Owner may own the land in fee, own an easement, or have certain franchise, prescription, or license rights to construct and maintain lines.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Right-of-Way [Archive]	ROW	11/3/2011	3/21/2013 (Becomes inactive 6/30/2014)	The corridor of land under a transmission line(s) needed to operate the line(s). The width of the corridor is established by engineering or construction standards as documented in either construction documents, pre-2007 vegetation maintenance records, or by the blowout standard in effect when the line was built. The ROW width in no case exceeds the Transmission Owner’s legal rights but may be less based on the aforementioned criteria.
Right-of-Way [Archive]	ROW	5/9/12	3/21/2013 (Becomes effective 7/1/2014)	The corridor of land under a transmission line(s) needed to operate the line(s). The width of the corridor is established by engineering or construction standards as documented in either construction documents, pre-2007 vegetation maintenance records, or by the blowout standard in effect when the line was built. The ROW width in no case exceeds the applicable Transmission Owner’s or applicable Generator Owner’s legal rights but may be less based on the aforementioned criteria.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Scenario [Archive]		2/7/2006	3/16/2007	Possible event.
Schedule [Archive]		2/8/2005	3/16/2007	(Verb) To set up a plan or arrangement for an Interchange Transaction. (Noun) An Interchange Schedule.
Scheduled Frequency [Archive]		2/8/2005	3/16/2007	60.0 Hertz, except during a time correction.
Scheduling Entity [Archive]		2/8/2005	3/16/2007	An entity responsible for approving and implementing Interchange Schedules.
Scheduling Path [Archive]		2/8/2005	3/16/2007	The Transmission Service arrangements reserved by the Purchasing-Selling Entity for a Transaction.
Sending Balancing Authority [Archive]		2/8/2005	3/16/2007	The Balancing Authority exporting the Interchange.
Sink Balancing Authority [Archive]		2/8/2005	3/16/2007	The Balancing Authority in which the load (sink) is located for an Interchange Transaction. (This will also be a Receiving Balancing Authority for the resulting Interchange Schedule.)
Sink Balancing Authority [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	The Balancing Authority in which the load (sink) is located for an Interchange Transaction and any resulting Interchange Schedule.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Source Balancing Authority [Archive]		2/8/2005	3/16/2007	The Balancing Authority in which the generation (source) is located for an Interchange Transaction. (This will also be a Sending Balancing Authority for the resulting Interchange Schedule.)
Source Balancing Authority [Archive]		2/6/2014	6/30/2014 (Becomes effective 10/1/2014)	The Balancing Authority in which the generation (source) is located for an Interchange Transaction and for any resulting Interchange Schedule.
Special Protection System (Remedial Action Scheme) [Archive]	SPS	2/8/2005	3/16/2007	An automatic protection system designed to detect abnormal or predetermined system conditions, and take corrective actions other than and/or in addition to the isolation of faulted components to maintain system reliability. Such action may include changes in demand, generation (MW and Mvar), or system configuration to maintain system stability, acceptable voltage, or power flows. An SPS does not include (a) underfrequency or undervoltage load shedding or (b) fault conditions that must be isolated or (c) out-of-step relaying (not designed as an integral part of an SPS). Also called Remedial Action Scheme.
Spinning Reserve [Archive]		2/8/2005	3/16/2007	Unloaded generation that is synchronized and ready to serve additional demand.
Stability [Archive]		2/8/2005	3/16/2007	The ability of an electric system to maintain a state of equilibrium during normal and abnormal conditions or disturbances.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Stability Limit [Archive]		2/8/2005	3/16/2007	The maximum power flow possible through some particular point in the system while maintaining stability in the entire system or the part of the system to which the stability limit refers.
Supervisory Control and Data Acquisition [Archive]	SCADA	2/8/2005	3/16/2007	A system of remote control and telemetry used to monitor and control the transmission system.
Supplemental Regulation Service [Archive]		2/8/2005	3/16/2007	A method of providing regulation service in which the Balancing Authority providing the regulation service receives a signal representing all or a portion of the other Balancing Authority's ACE.
Surge [Archive]		2/8/2005	3/16/2007	A transient variation of current, voltage, or power flow in an electric circuit or across an electric system.
Sustained Outage [Archive]		2/7/2006	3/16/2007	The deenergized condition of a transmission line resulting from a fault or disturbance following an unsuccessful automatic reclosing sequence and/or unsuccessful manual reclosing procedure.
System [Archive]		2/8/2005	3/16/2007	A combination of generation, transmission, and distribution components.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
System Operating Limit [Archive]	SOL	2/8/2005	3/16/2007	<p>The value (such as MW, MVar, Amperes, Frequency or Volts) that satisfies the most limiting of the prescribed operating criteria for a specified system configuration to ensure operation within acceptable reliability criteria. System Operating Limits are based upon certain operating criteria. These include, but are not limited to:</p> <ul style="list-style-type: none"> • Facility Ratings (Applicable pre- and post-Contingency equipment or facility ratings) • Transient Stability Ratings (Applicable pre- and post-Contingency Stability Limits) • Voltage Stability Ratings (Applicable pre- and post-Contingency Voltage Stability) • System Voltage Limits (Applicable pre- and post-Contingency Voltage Limits)
System Operator [Archive]		2/8/2005	3/16/2007	An individual at a control center (Balancing Authority, Transmission Operator, Generator Operator, Reliability Coordinator) whose responsibility it is to monitor and control that electric system in real time.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
System Operator [Archive]		2/6/2014	6/19/2014 (effective 7/1/2016)	An individual at a Control Center of a Balancing Authority, Transmission Operator, or Reliability Coordinator, who operates or directs the operation of the Bulk Electric System (BES) in Real-time.
Telemetry [Archive]		2/8/2005	3/16/2007	The process by which measurable electrical quantities from substations and generating stations are instantaneously transmitted to the control center, and by which operating commands from the control center are transmitted to the substations and generating stations.
Thermal Rating [Archive]		2/8/2005	3/16/2007	The maximum amount of electrical current that a transmission line or electrical facility can conduct over a specified time period before it sustains permanent damage by overheating or before it sags to the point that it violates public safety requirements.
Tie Line [Archive]		2/8/2005	3/16/2007	A circuit connecting two Balancing Authority Areas.
Tie Line Bias [Archive]		2/8/2005	3/16/2007	A mode of Automatic Generation Control that allows the Balancing Authority to 1.) maintain its Interchange Schedule and 2.) respond to Interconnection frequency error.
Time Error [Archive]		2/8/2005	3/16/2007	The difference between the Interconnection time measured at the Balancing Authority(ies) and the time specified by the National Institute of Standards and Technology. Time error is caused by the accumulation of Frequency Error over a given period.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Time Error Correction [Archive]		2/8/2005	3/16/2007	An offset to the Interconnection’s scheduled frequency to return the Interconnection’s Time Error to a predetermined value.
TLR (Transmission Loading Relief) ⁵ Log [Archive]		2/8/2005	3/16/2007	Report required to be filed after every TLR Level 2 or higher in a specified format. The NERC IDC prepares the report for review by the issuing Reliability Coordinator. After approval by the issuing Reliability Coordinator, the report is electronically filed in a public area of the NERC Web site.
Total Flowgate Capability [Archive]	TFC	08/22/2008	11/24/2009	The maximum flow capability on a Flowgate, is not to exceed its thermal rating, or in the case of a flowgate used to represent a specific operating constraint (such as a voltage or stability limit), is not to exceed the associated System Operating Limit.
Total Internal Demand [Archive]		5/6/2014	2/19/2015 (Becomes effective 7/1/2016)	The Demand of a metered system, which includes the Firm Demand, plus any controllable and dispatchable DSM Load and the Load due to the energy losses incurred within the boundary of the metered system.
Total Transfer Capability [Archive]	TTC	2/8/2005	3/16/2007	The amount of electric power that can be moved or transferred reliably from one area to another area of the interconnected transmission systems by way of all transmission lines (or paths) between those areas under specified system conditions.
Transaction [Archive]		2/8/2005	3/16/2007	See Interchange Transaction.

⁵ NERC added the spelled out term for TLR Log for clarification purposes.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Transfer Capability [Archive]		2/8/2005	3/16/2007	The measure of the ability of interconnected electric systems to move or transfer power <i>in a reliable manner</i> from one area to another over all transmission lines (or paths) between those areas under specified system conditions. The units of transfer capability are in terms of electric power, generally expressed in megawatts (MW). The transfer capability from "Area A" to "Area B" is <i>not</i> generally equal to the transfer capability from "Area B" to "Area A."
Transfer Distribution Factor [Archive]		2/8/2005	3/16/2007	See Distribution Factor.
Transient Cyber Asset [Archive]		2/12/2015		A Cyber Asset that (i) is capable of transmitting or transferring executable code, (ii) is not included in a BES Cyber System, (iii) is not a Protected Cyber Asset (PCA), and (iv) is directly connected (e.g., using Ethernet, serial, Universal Serial Bus, or wireless, including near field or Bluetooth communication) for 30 consecutive calendar days or less to a BES Cyber Asset, a network within an ESP, or a PCA. Examples include, but are not limited to, Cyber Assets used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.
Transmission [Archive]		2/8/2005	3/16/2007	An interconnected group of lines and associated equipment for the movement or transfer of electric energy between points of supply and points at which it is transformed for delivery to customers or is delivered to other electric systems.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Transmission Constraint [Archive]		2/8/2005	3/16/2007	A limitation on one or more transmission elements that may be reached during normal or contingency system operations.
Transmission Customer [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. Any eligible customer (or its designated agent) that can or does execute a transmission service agreement or can or does receive transmission service. 2. Any of the following responsible entities: Generator Owner, Load-Serving Entity, or Purchasing-Selling Entity.
Transmission Line [Archive]		2/7/2006	3/16/2007	A system of structures, wires, insulators and associated hardware that carry electric energy from one point to another in an electric power system. Lines are operated at relatively high voltages varying from 69 kV up to 765 kV, and are capable of transmitting large quantities of electricity over long distances.
Transmission Operator [Archive]	TOP	2/8/2005	3/16/2007	The entity responsible for the reliability of its "local" transmission system, and that operates or directs the operations of the transmission facilities.
Transmission Operator Area [Archive]		08/22/2008	11/24/2009	The collection of Transmission assets over which the Transmission Operator is responsible for operating.
Transmission Owner [Archive]	TO	2/8/2005	3/16/2007	The entity that owns and maintains transmission facilities.
Transmission Planner [Archive]	TP	2/8/2005	3/16/2007	The entity that develops a long-term (generally one year and beyond) plan for the reliability (adequacy) of the interconnected bulk electric transmission systems within its portion of the Planning Authority Area.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Transmission Reliability Margin [Archive]	TRM	2/8/2005	3/16/2007	The amount of transmission transfer capability necessary to provide reasonable assurance that the interconnected transmission network will be secure. TRM accounts for the inherent uncertainty in system conditions and the need for operating flexibility to ensure reliable system operation as system conditions change.
Transmission Reliability Margin Implementation Document [Archive]	TRMID	08/22/2008	11/24/2009	A document that describes the implementation of a Transmission Reliability Margin methodology, and provides information related to a Transmission Operator’s calculation of TRM.
Transmission Service [Archive]		2/8/2005	3/16/2007	Services provided to the Transmission Customer by the Transmission Service Provider to move energy from a Point of Receipt to a Point of Delivery.
Transmission Service Provider [Archive]	TSP	2/8/2005	3/16/2007	The entity that administers the transmission tariff and provides Transmission Service to Transmission Customers under applicable transmission service agreements.
Undervoltage Load Shedding Program [Archive]	UVLS Program	11/13/2014		An automatic load shedding program, consisting of distributed relays and controls, used to mitigate undervoltage conditions impacting the Bulk Electric System (BES), leading to voltage instability, voltage collapse, or Cascading. Centrally controlled undervoltage-based load shedding is not included.
Vegetation [Archive]		2/7/2006	3/16/2007	All plant material, growing or not, living or dead.
Vegetation Inspection [Archive]		2/7/2006	3/16/2007	The systematic examination of a transmission corridor to document vegetation conditions.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Vegetation Inspection [Archive]		11/3/2011	3/21/2013 (Becomes inactive 6/30/2014)	The systematic examination of vegetation conditions on a Right-of-Way and those vegetation conditions under the Transmission Owner’s control that are likely to pose a hazard to the line(s) prior to the next planned maintenance or inspection. This may be combined with a general line inspection.
Vegetation Inspection [Archive]		5/9/12	3/21/2013 (Becomes effective 7/1/2014)	The systematic examination of vegetation conditions on a Right-of-Way and those vegetation conditions under the applicable Transmission Owner’s or applicable Generator Owner’s control that are likely to pose a hazard to the line(s) prior to the next planned maintenance or inspection. This may be combined with a general line inspection.
Wide Area [Archive]		2/8/2005	3/16/2007	The entire Reliability Coordinator Area as well as the critical flow and status information from adjacent Reliability Coordinator Areas as determined by detailed system studies to allow the calculation of Interconnected Reliability Operating Limits.
Year One [Archive]		1/24/2011	11/17/2011	The first twelve month period that a Planning Coordinator or a Transmission Planner is responsible for assessing. For an assessment started in a given calendar year, Year One includes the forecasted peak Load period for one of the following two calendar years. For example, if a Planning Assessment was started in 2011, then Year One includes the forecasted peak Load period for either 2012 or 2013.

ERCOT Regional Definitions

The following terms were developed as regional definitions for the ERCOT region:

ERCOT Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Frequency Measurable Event [Archive]	FME	8/15/2013	1/16/2014 (Becomes effective 4/1/14)	An event that results in a Frequency Deviation, identified at the BA's sole discretion, and meeting one of the following conditions: <ul style="list-style-type: none"> i) a Frequency Deviation that has a pre-perturbation [the 16-second period of time before t(0)] average frequency to post-perturbation [the 32-second period of time starting 20 seconds after t(0)] average frequency absolute deviation greater than 100 mHz (the 100 mHz value may be adjusted by the BA to capture 30 to 40 events per year). Or ii) a cumulative change in generating unit/generating facility, DC tie and/or firm load pre-perturbation megawatt value to post-perturbation megawatt value absolute deviation greater than 550 MW (the 550 MW value may be adjusted by the BA to capture 30 to 40 events per year).
Governor [Archive]		8/15/2013	1/16/2014 (Becomes effective	The electronic, digital or mechanical device that implements Primary Frequency Response of generating units/generating facilities or other system elements.

ERCOT Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
			4/1/14)	
Primary Frequency Response [Archive]	PFR	8/15/2013	1/16/2014 (Becomes effective 4/1/14)	The immediate proportional increase or decrease in real power output provided by generating units/generating facilities and the natural real power dampening response provided by Load in response to system Frequency Deviations. This response is in the direction that stabilizes frequency.

NPCC Regional Definitions

The following definitions were developed for use in NPCC Regional Standards.

NPCC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Current Zero Time [Archive]		11/04/2010	10/20/2011	The time of the final current zero on the last phase to interrupt.
Generating Plant [Archive]		11/04/2010	10/20/2011	One or more generators at a single physical location whereby any single contingency can affect all the generators at that location.

ReliabilityFirst Regional Definitions

The following definitions were developed for use in ReliabilityFirst Regional Standards.

RFC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Resource Adequacy [Archive]		08/05/2009	03/17/2011	The ability of supply-side and demand-side resources to meet the aggregate electrical demand (including losses)
Net Internal Demand [Archive]		08/05/2009	03/17/2011	Total of all end-use customer demand and electric system losses within specified metered boundaries, less Direct Control Management and Interruptible Demand
Peak Period [Archive]		08/05/2009	03/17/2011	A period consisting of two (2) or more calendar months but less than seven (7) calendar months, which includes the period during which the responsible entity's annual peak demand is expected to occur
Wind Generating Station [Archive]		11/03/2011		A collection of wind turbines electrically connected together and injecting energy into the grid at one point, sometimes known as a "Wind Farm."
Year One [Archive]		08/05/2009	03/17/2011	The planning year that begins with the upcoming annual Peak Period

WECC Regional Definitions

The following definitions were developed for use in WECC Regional Standards.

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Area Control Error [†] [Archive]	ACE	3/12/2007	6/8/2007 (Becomes inactive 3/31/14)	Means the instantaneous difference between net actual and scheduled interchange, taking into account the effects of Frequency Bias including correction for meter error.
Automatic Generation Control [‡] [Archive]	AGC	3/12/2007	6/8/2007	Means equipment that automatically adjusts a Control Area's generation from a central location to maintain its interchange schedule plus Frequency Bias.
Automatic Time Error Correction [Archive]		3/26/2008	5/21/2009 (Becomes inactive 3/31/14)	A frequency control automatic action that a Balancing Authority uses to offset its frequency contribution to support the Interconnection's scheduled frequency.
Automatic Time Error Correction [Archive]		12/19/2012	10/16/2013 (Becomes effective 4/1/2014)	The addition of a component to the ACE equation that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error.
Average Generation [‡] [Archive]		3/12/2007	6/8/2007	Means the total MWh generated within the Balancing Authority Operator's Balancing Authority Area during the prior year divided by 8760 hours (8784 hours if the prior year had 366 days).
Business Day [‡] [Archive]		3/12/2007	6/8/2007	Means any day other than Saturday, Sunday, or a legal public holiday as designated in section 6103 of title 5, U.S. Code.

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Commercial Operation [Archive]		10/29/2008	4/21/2011	Achievement of this designation indicates that the Generator Operator or Transmission Operator of the synchronous generator or synchronous condenser has received all approvals necessary for operation after completion of initial start-up testing.
Contributing Schedule [Archive]		2/10/2009	3/17/2011	A Schedule not on the Qualified Transfer Path between a Source Balancing Authority and a Sink Balancing Authority that contributes unscheduled flow across the Qualified Transfer Path.
Dependability-Based Misoperation [Archive]		10/29/2008	4/21/2011	Is the absence of a Protection System or RAS operation when intended. Dependability is a component of reliability and is the measure of a device's certainty to operate when required.
Disturbance [±] [Archive]		3/12/2007	6/8/2007	Means (i) any perturbation to the electric system, or (ii) the unexpected change in ACE that is caused by the sudden loss of generation or interruption of load.

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Extraordinary Contingency [‡] [Archive]		3/12/2007	6/8/2007	Shall have the meaning set out in Excuse of Performance, section B.4.c. language in section B.4.c: <i>means any act of God, actions by a non-affiliated third party, labor disturbance, act of the public enemy, war, insurrection, riot, fire, storm or flood, earthquake, explosion, accident to or breakage, failure or malfunction of machinery or equipment, or any other cause beyond the Reliability Entity's reasonable control; provided that prudent industry standards (e.g. maintenance, design, operation) have been employed; and provided further that no act or cause shall be considered an Extraordinary Contingency if such act or cause results in any contingency contemplated in any WECC Reliability Standard (e.g., the "Most Severe Single Contingency" as defined in the WECC Reliability Criteria or any lesser contingency).</i>
Frequency Bias [‡] [Archive]		3/12/2007	6/8/2007	Means a value, usually given in megawatts per 0.1 Hertz, associated with a Control Area that relates the difference between scheduled and actual frequency to the amount of generation required to correct the difference.
Functionally Equivalent Protection System [Archive]	FEPS	10/29/2008	4/21/2011	A Protection System that provides performance as follows: <ul style="list-style-type: none"> • Each Protection System can detect the same faults within the zone of protection and provide the clearing times and coordination needed to comply with all Reliability Standards. • Each Protection System may have different components and operating characteristics.
Functionally Equivalent RAS [Archive]	FERAS	10/29/2008	4/21/2011	A Remedial Action Scheme ("RAS") that provides the same performance as follows: <ul style="list-style-type: none"> • Each RAS can detect the same conditions and provide

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
				mitigation to comply with all Reliability Standards. <ul style="list-style-type: none"> • Each RAS may have different components and operating characteristics.
Generating Unit Capability [±] [Archive]		3/12/2007	6/8/2007	Means the MVA nameplate rating of a generator.
Non-spinning Reserve [±] [Archive]		3/12/2007	6/8/2007	Means that Operating Reserve not connected to the system but capable of serving demand within a specified time, or interruptible load that can be removed from the system in a specified time.
Normal Path Rating [±] [Archive]		3/12/2007	6/8/2007	Is the maximum path rating in MW that has been demonstrated to WECC through study results or actual operation, whichever is greater. For a path with transfer capability limits that vary seasonally, it is the maximum of all the seasonal values.
Operating Reserve [±] [Archive]		3/12/2007	6/8/2007	Means that capability above firm system demand required to provide for regulation, load-forecasting error, equipment forced and scheduled outages and local area protection. Operating Reserve consists of Spinning Reserve and Nonspinning Reserve.
Operating Transfer Capability Limit [±] [Archive]	OTC	3/12/2007	6/8/2007	Means the maximum value of the most critical system operating parameter(s) which meets: (a) precontingency criteria as determined by equipment loading capability and acceptable voltage conditions, (b) transient criteria as determined by equipment loading capability and acceptable voltage conditions, (c) transient performance criteria, and (d) post-contingency loading and voltage criteria.

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Primary Inadvertent Interchange [Archive]		3/26/2008	5/21/2009	The component of area (n) inadvertent interchange caused by the regulating deficiencies of the area (n).
Qualified Controllable Device [Archive]		2/10/2009	3/17/2011	A controllable device installed in the Interconnection for controlling energy flow and the WECC Operating Committee has approved using the device for controlling the USF on the Qualified Transfer Paths.
Qualified Transfer Path [Archive]		2/10/2009	3/17/2011	A transfer path designated by the WECC Operating Committee as being qualified for WECC unscheduled flow mitigation.
Qualified Transfer Path Curtailment Event [Archive]		2/10/2009	3/17/2011	Each hour that a Transmission Operator calls for Step 4 or higher for one or more consecutive hours (See Attachment 1 IRO-006-WECC-1) during which the curtailment tool is functional.
Relief Requirement [Archive]		2/10/2009	3/17/2011 (Becomes inactive 6/30/2014)	The expected amount of the unscheduled flow reduction on the Qualified Transfer Path that would result by curtailing each Sink Balancing Authority's Contributing Schedules by the percentages listed in the columns of WECC Unscheduled Flow Mitigation Summary of Actions Table in Attachment 1 WECC IRO-006-WECC-1.
Relief Requirement [Archive]		2/7/2013	6/13/2014 (Becomes effective 7/1/2014)	The expected amount of the unscheduled flow reduction on the Qualified Transfer Path that would result by curtailing each Sink Balancing Authority's Contributing Schedules by the percentages determined in the WECC unscheduled flow mitigation guideline.
Secondary Inadvertent		3/26/2008	5/21/2009	The component of area (n) inadvertent interchange caused by

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Interchange [Archive]				the regulating deficiencies of area (i).
Security-Based Misoperation [Archive]		10/29/2008	4/21/2011	A Misoperation caused by the incorrect operation of a Protection System or RAS. Security is a component of reliability and is the measure of a device's certainty not to operate falsely.
Spinning Reserve [±] [Archive]		3/12/2007	6/8/2007	Means unloaded generation which is synchronized and ready to serve additional demand. It consists of Regulating reserve and Contingency reserve (as each are described in Sections B.a.i and ii).
Transfer Distribution Factor [Archive]	TDF	2/10/2009	3/17/2011	The percentage of USF that flows across a Qualified Transfer Path when an Interchange Transaction (Contributing Schedule) is implemented. [See the WECC Unscheduled Flow Mitigation Summary of Actions Table (Attachment 1 WECC IRO-006-WECC-1).]
WECC Table 2 [±] [Archive]		3/12/2007	6/8/2007	Means the table maintained by the WECC identifying those transfer paths monitored by the WECC regional Reliability coordinators. As of the date set out therein, the transmission paths identified in Table 2 are as listed in Attachment A to this Standard.

Endnotes

[±] FERC approved the WECC Tier One Reliability Standards in the Order Approving Regional Reliability Standards for the Western Interconnection and Directing Modifications, 119 FERC ¶ 61,260 (June 8, 2007). In that Order, FERC directed WECC to address the inconsistencies between the regional definitions and the NERC Glossary in developing permanent replacement standards. The replacement standards designed to address the shortcomings were filed with FERC in 2009.

Exhibit B

**Informational Summary of Each Reliability Standard Applicable to Nova Scotia,
Approved by FERC in First Quarter 2015**

**EXHIBIT B: Informational Summary of Reliability Standard Applicable to Nova Scotia,
Approved by FERC in First Quarter 2015**

MOD-031-1. To provide authority for applicable entities to collect Demand, energy and related data to support reliability studies and assessments and to enumerate the responsibilities and obligations of requestors and respondents of that data.

Applicability:

- Planning Authority and Planning Coordinator (hereafter collectively referred to as the “Planning Coordinator”)¹
- Transmission Planner
- Balancing Authority
- Resource Planner
- Load-Serving Entity
- Distribution Provider

Reliability Standard MOD-031-1 includes four requirements.

On May 13, 2014, NERC submitted a petition for approval of MOD-031-1 to the Federal Energy Regulatory Commission (FERC), and on February 19, 2015, FERC approved the standard.

¹ This proposed standard combines “Planning Authority” with “Planning Coordinator” in the list of applicable functional entities. The NERC Functional Model lists “Planning Coordinator” while the registration criteria list “Planning Authority,” and they are not yet synchronized. Until that occurs, the proposed standard applies to both “Planning Authority” and “Planning Coordinator.”

**EXHIBIT B: Informational Summary of Reliability Standard Applicable to Nova Scotia,
Approved by FERC in First Quarter 2015**

PRC-005-3. To document and implement programs for the maintenance of all Protection Systems and Automatic Reclosing affecting the reliability of the Bulk Electric System (BES) so that they are kept in working order.

Applicability:

- Transmission Owner
- Generator Owner
- Distribution Owner

Reliability Standard PRC-005-3 includes five requirements.

On February 14, 2014, NERC submitted a petition for approval of PRC-005-3 to FERC, and on January 22, 2015, FERC approved the standard.

**EXHIBIT B: Informational Summary of Reliability Standard Applicable to Nova Scotia,
Approved by FERC in First Quarter 2014**

PRC-006-2. To establish design and documentation requirements for automatic underfrequency load shedding (UFLS) programs to arrest declining frequency, assist recovery of frequency following underfrequency events, and provide last resort system preservation measures.

Applicability:

- Planning Coordinators
- UFLS entities²
- Transmission Owners that own Elements identified in the UFLS program established by the Planning Coordinators.

Reliability Standard PRC-006-2 includes fifteen requirements and several tables.

On December 15, 2014, NERC submitted a petition for approval of PRC-006-2 to FERC, and on March 4, 2015, FERC approved the standard.

² The term “UFLS entities” is defined in Reliability Standard PRC-006-2 and shall mean “all entities that are responsible for the ownership, operation, or control of UFLS equipment as required by the UFLS program established by the Planning Coordinators. Such entities may include one or more of the following: Transmission Owners or Distribution Providers.”

Exhibit C: List of Currently Effective NERC Reliability Standards

EXHIBIT C

Resource and Demand Balancing (BAL)	
BAL-001-1	Real Power Balancing Control Performance
BAL-001-TRE-1	Primary Frequency Response in the ERCOT Region
BAL-002-1	Disturbance Control Performance
BAL-002-WECC-2	Contingency Reserve
BAL-003-0.1b	Frequency Response and Bias
BAL-003-1	Frequency Response and Frequency Bias Setting
BAL-004-0	Time Error Correction
BAL-004-WECC-02	Automatic Time Error Correction (ATEC)
BAL-005-0.2b	Automatic Generation Control
BAL-006-2	Inadvertent Interchange
BAL-502-RFC-02	Planning Resource Adequacy Analysis, Assessment and Documentation
Communications (COM)	
COM-001-1.1	Telecommunications
COM-002-2	Communications and Coordination
Critical Infrastructure Protection (CIP)	
CIP-002-3	Cyber Security — Critical Cyber Asset Identification
CIP-003-3	Cyber Security — Security Management Controls
CIP-004-3a	Cyber Security — Personnel & Training
CIP-005-3a	Cyber Security — Electronic Security Perimeter(s)
CIP-006-3c	Cyber Security — Physical Security of Critical Cyber Assets
CIP-007-3a	Cyber Security — Systems Security Management

CIP-008-3	Cyber Security — Incident Reporting and Response Planning
CIP-009-3	Cyber Security — Recovery Plans for Critical Cyber Assets
Emergency Preparedness and Operations (EOP)	
EOP-001-2.1b	Emergency Operations Planning
EOP-002-3.1	Capacity and Energy Emergencies
EOP-003-2	Load Shedding Plans
EOP-004-2	Event Reporting
EOP-005-2	System Restoration from Blackstart Resources
EOP-006-2	System Restoration Coordination
EOP-008-1	Loss of Control Center Functionality
EOP-010-1	Geomagnetic Disturbance Operations
Facilities Design, Connections, and Maintenance (FAC)	
FAC-001-1	Facility Connection Requirements
FAC-002-1	Coordination of Plans For New Generation, Transmission, and End-User Facilities
FAC-003-3	Transmission Vegetation Management
FAC-008-3	Facility Ratings
FAC-010-2.1	System Operating Limits Methodology for the Planning Horizon
FAC-011-2	System Operating Limits Methodology for the Operations Horizon
FAC-013-2	Assessment of Transfer Capability for the Near-Term Transmission Planning Horizon
FAC-014-2	Establish and Communicate System Operating Limits
FAC-501-WECC-1	Transmission Maintenance
Interchange Scheduling and Coordination (INT)	
INT-004-3.1	Dynamic Transfers
INT-006-4	Evaluation of Interchange Transactions
INT-009-2.1	Implementation of Interchange

INT-010-2.1	Interchange Initiation and Modification for Reliability
INT-011-1.1	Intra-Balancing Authority Transaction Identification
Interconnection Reliability Operations and Coordination (IRO)	
IRO-001-1.1	Reliability Coordination — Responsibilities and Authorities
IRO-002-2	Reliability Coordination — Facilities
IRO-003-2	Reliability Coordination — Wide-Area View
IRO-004-2	Reliability Coordination — Operations Planning
IRO-005-3.1a	Reliability Coordination — Current Day Operations
IRO-006-5	Reliability Coordination — Transmission Loading Relief (TLR)
IRO-006-EAST-1	Transmission Loading Relief Procedure for the Eastern Interconnection
IRO-006-TRE-1	IROL and SOL Mitigation in the ERCOT Region
IRO-006-WECC-2	Qualified Transfer Path Unscheduled Flow (USF) Relief
IRO-008-1	Reliability Coordinator Operational Analyses and Real-time Assessments
IRO-009-1	Reliability Coordinator Actions to Operate Within IROLs
IRO-010-1a	Reliability Coordinator Data Specification and Collection
IRO-014-1	Procedures, Processes, or Plans to Support Coordination Between Reliability Coordinators
IRO-015-1	Notifications and Information Exchange Between Reliability Coordinators
IRO-016-1	Coordination of Real-time Activities Between Reliability Coordinators
Modeling, Data, and Analysis (MOD)	
MOD-001-1a	Available Transmission System Capability
MOD-004-1	Capacity Benefit Margin

MOD-008-1	Transmission Reliability Margin Calculation Methodology
MOD-010-0	Steady-State Data for Modeling and Simulation of the Interconnected Transmission System
MOD-012-0	Dynamics Data for Modeling and Simulation of the Interconnected Transmission System
MOD-016-1.1	Documentation of Data Reporting Requirements for Actual and Forecast Demands, Net Energy for Load, and Controllable Demand-Side Management
MOD-017-0.1	Aggregated Actual and Forecast Demands and Net Energy for Load
MOD-018-0	Treatment of Nonmember Demand Data and How Uncertainties are Addressed in the Forecasts of Demand and Net Energy for Load
MOD-019-0.1	Reporting of Interruptible Demands and Direct Control Load Management
MOD-020-0	Providing Interruptible Demands and Direct Control Load Management Data to System Operators and Reliability Coordinators
MOD-021-1	Documentation of the Accounting Methodology for the Effects of Demand-Side Management in Demand and Energy Forecasts
MOD-026-1	Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions
MOD-027-1	Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions
MOD-028-2	Area Interchange Methodology
MOD-029-1a	Rated System Path Methodology
MOD-030-2	Flowgate Methodology
Nuclear (NUC)	
NUC-001-2.1	Nuclear Plant Interface Coordination
Personnel Performance, Training, and Qualifications (PER)	
PER-001-0.2	Operating Personnel Responsibility and Authority
PER-003-1	Operating Personnel Credentials

PER-004-2	Reliability Coordination — Staffing
PER-005-1	System Personnel Training
Protection and Control (PRC)	
PRC-001-1.1	System Protection Coordination
PRC-002-NPCC-01	Disturbance Monitoring
PRC-004-2.1a	Analysis and Mitigation of Transmission and Generation Protection System Misoperations
PRC-004-WECC-1	Protection System and Remedial Action Scheme Misoperation
PRC-005-1.1b	Transmission and Generation Protection System Maintenance and Testing
PRC-005-2	Protection System Maintenance
PRC-006-1	Automatic Underfrequency Load Shedding
PRC-006-SERC-01	Automatic Underfrequency Load Shedding Requirements
PRC-008-0	Implementation and Documentation of Underfrequency Load Shedding Equipment Maintenance Program
PRC-010-0	Technical Assessment of the Design and Effectiveness of Undervoltage Load Shedding Program
PRC-011-0	Undervoltage Load Shedding System Maintenance and Testing
PRC-015-0	Special Protection System Data and Documentation
PRC-016-0.1	Special Protection System Misoperations
PRC-017-0	Special Protection System Maintenance and Testing
PRC-018-1	Disturbance Monitoring Equipment Installation and Data Reporting
PRC-021-1	Under-Voltage Load Shedding Program Data
PRC-022-1	Under-Voltage Load Shedding Program Performance
PRC-023-2	Transmission Relay Loadability
PRC-023-3	Transmission Relay Loadability
PRC-025-1	Generator Relay Loadability
Transmission Operations (TOP)	

TOP-001-1a	Reliability Responsibilities and Authorities
TOP-002-2.1b	Normal Operations Planning
TOP-003-1	Planned Outage Coordination
TOP-004-2	Transmission Operations
TOP-005-2a	Operational Reliability Information
TOP-006-2	Monitoring System Conditions
TOP-007-0	Reporting System Operating Limit (SOL) and Interconnection Reliability Operating Limit (IROL) Violations
TOP-007-WECC-1a	System Operating Limits
TOP-008-1	Response to Transmission Limit Violations
Transmission Planning (TPL)	
TPL-001-0.1	System Performance Under Normal (No Contingency) Conditions (Category A)
TPL-001-4	Transmission System Planning Performance Requirements
TPL-002-0b	System Performance Following Loss of a Single Bulk Electric System Element (Category B)
TPL-003-0b	System Performance Following Loss of Two or More Bulk Electric System Elements (Category C)
TPL-004-0a	System Performance Following Extreme Events Resulting in the Loss of Two or More Bulk Electric System Elements (Category D)
Voltage and Reactive (VAR)	
VAR-001-4	Voltage and Reactive Control
VAR-002-3	Generator Operation for Maintaining Network Voltage Schedules
VAR-002-WECC-2	Automatic Voltage Regulators (AVR)
VAR-501-WECC-2	Power System Stabilizer (PSS)