
**BEFORE THE
NOVA SCOTIA UTILITY AND REVIEW BOARD
OF THE PROVINCE OF NOVA SCOTIA**

**NORTH AMERICAN ELECTRIC)
RELIABILITY CORPORATION)**

**FIRST QUARTER 2014 APPLICATION
FOR APPROVAL OF RELIABILITY STANDARDS OF THE
NORTH AMERICAN ELECTRIC RELIABILITY CORPORATION**

Gerald W. Cauley
President and Chief Executive Officer
North American Electric Reliability Corporation
3353 Peachtree Road, N.E.
Suite 600, North Tower
Atlanta, GA 30326
(404) 446-2560
(404) 446-2595– facsimile

Charles A. Berardesco
Senior Vice President and General Counsel
Holly A. Hawkins
Associate General Counsel
Stacey Tyrewala
Senior Counsel
North American Electric Reliability Corporation
1325 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 400-3000
(202) 644-8099– facsimile
charlie.berardesco@nerc.net
holly.hawkins@nerc.net
stacey.tyrewala@nerc.net

*Counsel for North American Electric Reliability
Corporation*

May 20, 2014

TABLE OF CONTENTS

I. NOTICES AND COMMUNICATIONS 2

II. REQUEST FOR APPROVAL OF RELIABILITY STANDARDS 2

III. CONCLUSION.....10

EXHIBITS

Exhibit A –

- 1.) NERC Reliability Standards Applicable to Nova Scotia, Approved by FERC in First Quarter 2014
- 2.) PDF Copies of Reliability Standards being filed for approval; and
- 3.) Updated NERC Glossary of Terms

Exhibit B – Informational Summary of Each Reliability Standard Applicable to Nova Scotia, Approved by FERC in First Quarter 2014

Exhibit C – List of Currently Effective NERC Reliability Standards

**BEFORE THE
NOVA SCOTIA UTILITY AND REVIEW BOARD
OF THE PROVINCE OF NOVA SCOTIA**

**NORTH AMERICAN ELECTRIC)
RELIABILITY CORPORATION)**

**FIRST QUARTER 2014 APPLICATION
FOR APPROVAL OF RELIABILITY STANDARDS OF THE
NORTH AMERICAN ELECTRIC RELIABILITY CORPORATION**

The North American Electric Reliability Corporation (“NERC”) hereby submits to the Nova Scotia Utility and Review Board (“NSUARB”) an application for approval of the NERC Reliability Standards and an updated NERC Glossary of Terms approved by the United States Federal Energy Regulatory Commission (“FERC” or the “Commission”), submitted for informational purposes. This filing covers the time period from January 1, 2014 through March 31, 2014. NERC requests that, as specified herein, these Reliability Standards and Definitions be made mandatory and enforceable for users, owners, and operators of the Bulk-Power System within the Province of Nova Scotia.

In support of this request for approval of the proposed Reliability Standards and Definitions, NERC submits the following information: (1) Reliability Standards and Definitions approved by FERC in the first quarter of 2014 and the associated updated NERC Glossary of Terms (*see Exhibit A*); (2) an informational summary for each Reliability Standard approved by FERC in the first quarter of 2014, including each Standard’s purpose, applicability, and ballot body approval percentages (*see Exhibit B*); and (3) an updated list of the currently-effective Reliability Standards as approved by FERC (*see Exhibit C*).

I. NOTICES AND COMMUNICATIONS

Notices and communications regarding this Application may be addressed to:

Gerald W. Cauley
President and Chief Executive Officer
North American Electric Reliability Corporation
3353 Peachtree Road, N.E.
Suite 600, North Tower
Atlanta, GA 30326
(404) 446-2560
(404) 446-2595– facsimile

Charles A. Berardesco
Senior Vice President and General Counsel
Holly A. Hawkins
Associate General Counsel
Stacey Tyrewala
Senior Counsel
North American Electric Reliability Corporation
1325 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 400-3000
(202) 644-8099– facsimile
charlie.berardesco@nerc.net
holly.hawkins@nerc.net
stacey.tyrewala@nerc.net

II. REQUEST FOR APPROVAL OF RELIABILITY STANDARDS

A. Background: NERC Quarterly Filing of Proposed Reliability Standards

On July 20, 2011, NSUARB issued a decision approving the Reliability Standards and NERC Glossary of Terms that NERC submitted to NSUARB on June 30, 2010, and accepted as guidance the Violation Risk Factors (“VRF”) and Violation Severity Levels (“VSL”) associated with the currently-effective Reliability Standards.¹

NERC has been certified as the Electric Reliability Organization (“ERO”)² in the United States under Section 215 of the Federal Power Act.³ The Reliability Standards contained in **Exhibit A** have been approved as mandatory and enforceable for users, owners, and operators

¹ *In the Matter of an Application by North American Electric Reliability Corporation for Approval of its Reliability Standards, and an application by Northeast Power Coordinating Council, Inc. for Approval of its Regional Reliability Criteria*, NSUARB-NERC-R-10 (July 20, 2011) (“NSUARB Decision”).

² Through enactment of the Energy Policy Act of 2005, the U.S. Congress entrusted FERC with the duties of approving and enforcing rules in the U.S. to ensure the reliability of the Nation’s bulk power system, and with the duties of certifying an ERO. On July 20, 2006, FERC certified NERC as the ERO, charged with developing mandatory and enforceable Reliability Standards, which are subject to FERC review and approval.

³ 16 U.S.C. § 824o(f) (2006).

within the United States by FERC.⁴ Some or all of NERC's Reliability Standards are now mandatory in the Canadian Provinces of Alberta, British Columbia, Manitoba, New Brunswick, Nova Scotia, Ontario, Québec, and Saskatchewan.

NERC entered into a Memorandum of Understanding ("MOU") with the NSUARB⁵ and a separate MOU with Nova Scotia Power Incorporated ("NSPI"), and the Northeast Power Coordinating Council, Inc. ("NPCC"),⁶ which became effective on December 22, 2006 and May 11, 2010, respectively. The May 11, 2010 MOU sets forth the mutual understandings of NERC, NSPI, and NPCC regarding the approval and implementation of NERC Reliability Standards and NPCC Regional Reliability Criteria in Nova Scotia and other related matters.

In addition, the NSUARB Decision approved a "quarterly review" process for considering new and amended NERC standards and criteria.⁷ On September 2, 2011, NERC submitted its Second Quarter 2011 application filing to NSUARB, in which NERC committed to file a quarterly application with the NSUARB within sixty days after the end of each quarter for approval of all NERC Reliability Standards and updated Glossary of Terms approved by FERC during that quarter.

The NSUARB Decision also determined that quarterly "applications will not be processed by the Board until [FERC] has approved or remanded the standards in the United States."⁸ Therefore, NERC is only requesting NSUARB approval for those Reliability Standards approved by FERC.

⁴ Those standards marked with an asterisk are not yet effective, but have been approved by FERC.

⁵ See Memorandum of Understanding between Nova Scotia Utility and Review Board and North American Electric Reliability Corporation (signed December 22, 2006).

⁶ See Memorandum of Understanding between Nova Scotia Power Incorporated and the Northeast Power Coordinating Council, Inc. and the North American Electric Reliability Corporation (signed May 11, 2010).

⁷ NSUARB Decision at P 30.

⁸ NSUARB Decision at P 30.

The NSUARB Decision also concluded that NSUARB approval is not required for VRFs and VSLs associated with proposed Reliability Standards.⁹ Thus, NERC does not seek formal approval of VRFs and VSLs associated with the Reliability Standards submitted in this quarterly application. However, because the NSUARB has determined that it will accept the VRFs and VSLs as guidance, NERC is providing a link to the associated FERC-approved VRFs and VSLs for the Reliability Standards for informational purposes.¹⁰

NERC has not included in this filing the full developmental record for the standards, which consists of the draft standards, comments received, responses to the comments by the drafting teams, and the full voting record, because the record for each standard may consist of several thousand pages. NERC will make the full developmental record available to the NSUARB or other interested parties upon request.

B. Overview of NERC Reliability Standards Development Process

NERC Reliability Standards define the requirements for reliably planning and operating the North American Bulk-Power System. These standards are developed by industry stakeholders using a balanced, open, fair and inclusive process managed by the NERC Standards Committee. The Standards Committee is facilitated by NERC staff and comprised of representatives from ten electricity stakeholder segments. Stakeholders, through the balloting process, and the NERC Board of Trustees have approved the standards provided in **Exhibit A**.

NERC develops Reliability Standards in accordance with Section 300 (Reliability Standards Development) and Appendix 3A (Standards Processes Manual) of its Rules of

⁹ *Id.* at P 33.

¹⁰ NERC's VRF and VSL matrices are available at: <http://www.nerc.com/pa/stand/Pages/ReliabilityStandardsUnitedStates.aspx?jurisdiction=United States>. See left-hand side of webpage for downloadable documents.

Procedure.¹¹ NERC’s Reliability Standards development process has been approved by the American National Standards Institute as being open, inclusive, balanced, and fair. The *Glossary of Terms Used in NERC Reliability Standards* – most recently updated May 8, 2014 – lists each term that is defined for use in one or more of NERC’s continent-wide or Regional Reliability Standards approved by the NERC Board of Trustees, and is submitted for informational purposes. NERC is requesting approval of five Definitions (Frequency Response Measure; Frequency Response Obligation; Frequency Response Sharing Group; Frequency Bias Setting; and Bulk Electric System) included in the Glossary, as detailed blow.

C. Description of Proposed Definitions and Reliability Standards, First Quarter 2014

As explained below, three FERC orders were issued in the first quarter of 2014 approving NERC Reliability Standards and related Glossary terms: (1) an order approving Reliability Standard BAL-003-1¹² issued on January 16, 2014 (which includes four Definitions); (2) an order approving five Generator Verification Reliability Standards¹³ issued on March 20, 2014; and (3) an order approving a revised Definition of “bulk electric system.”¹⁴ Additionally, on January 30, 2014, FERC approved Revisions to the NERC Rules of Procedure Appendix 4D.

Reliability Standard	Effective Date
Resource and Demand Balancing(BAL) Standard	
BAL-003-1*	4/1/2015
Modeling, Data, and Analysis (MOD) Standards	
MOD-025-2*	7/1/2016

¹¹ NERC’s Rules of Procedure are available at: <http://www.nerc.com/AboutNERC/Pages/Rules-of-Procedure.aspx>.

¹² *North American Electric Reliability Corp.*, 146 FERC ¶ 61,024 (2014).

¹³ *North American Electric Reliability Corp.*, 146 FERC ¶ 61,213 (2014).

¹⁴ *North American Electric Reliability Corp.*, 146 FERC ¶ 61,199 (2014).

MOD-026-1*	7/1/2014
MOD-027-1*	7/1/2014
Protection and Control (PRC) Standards	
PRC-019-1*	7/1/2016
PRC-024-1*	7/1/2016

* At the time of this filing, all standards marked with an asterisk are not yet effective, but have been approved by FERC and have a future mandatory effective date.

1. BAL-003-1

On January 16, 2014, FEC approved Reliability Standard BAL-003-1- Frequency Response and Frequency Bias Setting and three new definitions and one revised definition to be added to the NERC Glossary of Terms. The approved definitions of the terms “Frequency Response Measure,” “Frequency Response Obligation,” “Frequency Response Sharing Group,” and a revised definition of “Frequency Bias Setting” are included in the updated Glossary in **Exhibit A**. Reliability Standard BAL-003-1 establishes a minimum Frequency Response Obligation for each Balancing Authority; provides a uniform calculation of frequency response; establishes Frequency Bias Settings that set values closer to actual Balancing Authority frequency response; and encourages coordinated automatic generation control (AGC) operation.

2. Generator Verification Reliability Standards

On March 20, 2014, FERC approved the five Generator Verification Reliability Standards: MOD-025-2 –Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability; MOD-026-1— Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions; MOD-027-1—Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions; PRC-019-1 –Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection; and PRC-024-1—Generator Frequency and Voltage Protective Relay Settings. The generator verification

Reliability Standards improve the accuracy of model verifications needed to support reliability and enhance the coordination of generator protection systems and voltage regulating system controls.

Reliability Standards MOD-026-1, MOD-027-1, PRC-019-1 and PRC-024-1 are new, whereas Reliability Standard MOD-025-2 consolidates two existing Reliability Standards, MOD-024-1 (Verification of Generator Gross and Net Real Power Capability) and MOD-025-1 (Verification of Generator Gross and Net Reactive Power Capability), into one new Reliability Standard.

3. Definition of “Bulk Electric System”

On March 20, 2014, FERC approved revisions to the definition of “Bulk Electric System” which is included in the NERC Glossary of Terms. These revisions are reflected in **Exhibit A**. The revised definition of “Bulk Electric System” supersedes in its entirety the version approved by FERC in Order Nos. 773 and 773-A (commonly referred to as the “Phase 1 BES Definition”). As the Board noted previously, FERC granted a motion by NERC to extend to the effective date of the BES Definition to July 1, 2014, to allow for time to refine the definition. NERC submitted a revised BES Definition to FERC on December 13, 2013, which was accepted by FERC on March 20, 2014.

NERC’s proposed definition consisted of a “core” definition and a list of configurations of facilities that will be included or excluded from the “core” definition, *i.e.*, Inclusions and Exclusions. The Inclusions address five specific facilities configurations to provide clarity that the facilities described in these configurations are included in the BES. Similarly, the Exclusions address four specific facilities configurations that are *not* included in the BES. The Inclusions and Exclusions address typical system facilities and configurations such as

generation and radial systems, provide additional granularity that improves consistency, and provide a practical means to determine the status of common system configurations. The case-by-case exception process, to add elements to, and remove elements from, the BES adds transparency and uniformity to the process of determining what constitutes the Bulk Electric System.

The proposed revisions to the BES Definition build upon Phase 1 and include significant improvements to the Inclusions and Exclusions, without modifying the core definition. A summary of the proposed revision to the BES Definition is provided below.

Summary of Proposed Revisions to the BES Definition

No changes are proposed to the core BES Definition, Inclusion I3 (Blackstart Resources) or Exclusion E2 (Behind the Meter Generation). Minor clarifying changes are proposed to:

- Inclusion I1 (Transformers);
- Inclusion I2 (Generating Resources); and
- Inclusion I5 (Static or Dynamic Reactive Power Devices).

Substantive revisions are proposed to Inclusion I4 (Dispersed Power Producing Resources) and Exclusions E1 (Radial Systems), E3 (Local Networks) and E4 (Reactive Power Devices), as described below.

- Inclusion I4 (Dispersed Power Producing Resources):
 - Collector systems, from the point where the generation aggregates to 75 MVA to a common point of connection at a voltage of 100 kV or above, are proposed to be included in the BES.
- Exclusion E1 (Radial Systems):
 - A threshold of 50 kV is proposed as the operating voltage below which loops between radial systems will not preclude the application of Exclusion E1,¹⁵

¹⁵ This ensures that Elements at or above 100 kV in a looped configuration are not excluded from the BES by application of Exclusion E1. *See* Order No. 773-A at P 44.

- In accordance with Order Nos. 773 and 773-A, Exclusion E1 is proposed to be modified so that it does not apply to tie-lines, *i.e.*, generator interconnection facilities, for BES generators.
- Exclusion E3 (Local Networks):
 - In accordance with Order Nos. 773 and 773-A, the 100 kV minimum operating voltage for Exclusion E3 is proposed for removal;
 - In accordance with Order Nos. 773 and 773-A, Exclusion E3 is proposed to be modified so that it does not apply to tie-lines, *i.e.*, generator interconnection facilities, for BES generators;
 - A revision is proposed to Exclusion E3 to include any part of a permanent Flowgate.
- Exclusion E4 (Reactive Power Devices):
 - A revision is proposed to Exclusion E4 to remove ownership implications consistent with the component-based nature of the BES Definition.

III. CONCLUSION

NERC respectfully requests that the NSUARB approve the Reliability Standards and Definitions as specified herein.

Respectfully submitted,

/s/ Stacey Tyrewala

Gerald W. Cauley
President and Chief Executive Officer
North American Electric Reliability Corporation
3353 Peachtree Road, N.E.
Suite 600, North Tower
Atlanta, GA 30326
(404) 446-2560
(404) 446-2595– facsimile

Charles A. Berardesco
Senior Vice President and General Counsel
Holly A. Hawkins
Associate General Counsel
Stacey Tyrewala
Senior Counsel
North American Electric Reliability Corporation
1325 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 400-3000
(202) 644-8099– facsimile
charlie.berardesco@nerc.net
holly.hawkins@nerc.net
stacey.tyrewala@nerc.net

*Counsel for North American Electric Reliability
Corporation*

Exhibit A (1): Reliability Standards Applicable to Nova Scotia, Approved by FERC in First Quarter 2014

EXHIBIT A(1): NERC Reliability Standards Applicable to Nova Scotia, Approved by FERC in First Quarter 2014

Reliability Standard	Effective Date
Resource and Demand Balancing(BAL) Standard	
BAL-003-1*	4/1/2015
Modeling, Data, and Analysis (MOD) Standards	
MOD-025-2*	7/1/2016
MOD-026-1*	7/1/2014
MOD-027-1*	7/1/2014
Protection and Control (PRC) Standards	
PRC-019-1*	7/1/2016
PRC-024-1*	7/1/2016

* At the time of this filing, all standards marked with an asterisk are not yet effective, but have been approved by FERC and have a future mandatory effective date.

Exhibit A (2): PDF Copies of Reliability Standards Being Filed For Approval

A. Introduction

Title: Frequency Response and Frequency Bias Setting

Number: BAL-003-1

Purpose: To require sufficient Frequency Response from the Balancing Authority (BA) to maintain Interconnection Frequency within predefined bounds by arresting frequency deviations and supporting frequency until the frequency is restored to its scheduled value. To provide consistent methods for measuring Frequency Response and determining the Frequency Bias Setting.

Applicability:

1.1. Balancing Authority

1.1.1 The Balancing Authority is the responsible entity unless the Balancing Authority is a member of a Frequency Response Sharing Group, in which case, the Frequency Response Sharing Group becomes the responsible entity.

1.2. Frequency Response Sharing Group

Effective Date:

1.3. In those jurisdictions where regulatory approval is required, Requirements R2, R3 and R4 of this standard shall become effective the first calendar day of the first calendar quarter 12 months after applicable regulatory approval. In those jurisdictions where no regulatory approval is required, Requirements R2, R3 and R4 of this standard shall become effective the first calendar day of the first calendar quarter 12 months after Board of Trustees adoption.

1.4. In those jurisdictions where regulatory approval is required, Requirements R1 of this standard shall become effective the first calendar day of the first calendar quarter 24 months after applicable regulatory approval. In those jurisdictions where no regulatory approval is required, Requirements R1 of this standard shall become effective the first calendar day of the first calendar quarter 24 months after Board of Trustees adoption.

B. Requirements

R1. Each Frequency Response Sharing Group (FRSG) or Balancing Authority that is not a member of a FRSG shall achieve an annual Frequency Response Measure (FRM) (as calculated and reported in accordance with Attachment A) that is equal to or more negative than its Frequency Response Obligation (FRO) to ensure that sufficient Frequency Response is provided by each FRSG or BA that is not a member of a FRSG to maintain Interconnection Frequency Response equal to or more negative than the Interconnection Frequency Response Obligation. [*Risk Factor: Medium*][*Time Horizon: Real-time Operations*]

- R2.** Each Balancing Authority that is a member of a multiple Balancing Authority Interconnection and is not receiving Overlap Regulation Service and uses a fixed Frequency Bias Setting shall implement the Frequency Bias Setting determined in accordance with Attachment A, as validated by the ERO, into its Area Control Error (ACE) calculation during the implementation period specified by the ERO and shall use this Frequency Bias Setting until directed to change by the ERO. *[Risk Factor: Medium][Time Horizon: Operations Planning]*
- R3.** Each Balancing Authority that is a member of a multiple Balancing Authority Interconnection and is not receiving Overlap Regulation Service and is utilizing a variable Frequency Bias Setting shall maintain a Frequency Bias Setting that is: *[Risk Factor: Medium][Time Horizon: Operations Planning]*
- 1.1** Less than zero at all times, and
 - 1.2** Equal to or more negative than its Frequency Response Obligation when Frequency varies from 60 Hz by more than +/- 0.036 Hz.
- R4.** Each Balancing Authority that is performing Overlap Regulation Service shall modify its Frequency Bias Setting in its ACE calculation, in order to represent the Frequency Bias Setting for the combined Balancing Authority Area, to be equivalent to either: *[Risk Factor: Medium][Time Horizon: Operations Planning]*
- The sum of the Frequency Bias Settings as shown on FRS Form 1 and FRS Form 2 for the participating Balancing Authorities as validated by the ERO, or
 - The Frequency Bias Setting shown on FRS Form 1 and FRS Form 2 for the entirety of the participating Balancing Authorities' Areas.

C. Measures

- M1.** Each Frequency Response Sharing Group or Balancing Authority that is not a member of a Frequency Response Sharing Group shall have evidence such as dated data plus documented formula in either hardcopy or electronic format that it achieved an annual FRM (in accordance with the methods specified by the ERO in Attachment A with data from FRS Form 1 reported to the ERO as specified in Attachment A) that is equal to or more negative than its FRO to demonstrate compliance with Requirement R1.
- M2.** The Balancing Authority that is a member of a multiple Balancing Authority Interconnection and is not receiving Overlap Regulation Service shall have evidence such as a dated document in hard copy or electronic format showing the ERO validated Frequency Bias Setting was implemented into its ACE calculation within the implementation period specified or other evidence to demonstrate compliance with Requirement R2.
- M3.** The Balancing Authority that is a member of a multiple Balancing Authority Interconnection, is not receiving Overlap Regulation Service and is utilizing variable Frequency Bias shall have evidence such as a dated report in hard copy or electronic format showing the average clock-minute average Frequency Bias Setting was less than zero and during periods when the clock-minute average frequency was outside of

the range 59.964 Hz to 60.036 Hz was equal to or more negative than its Frequency Response Obligation to demonstrate compliance with Requirement R3.

- M4.** The Balancing Authority shall have evidence such as a dated operating log, database or list in hard copy or electronic format showing that when it performed Overlap Regulation Service, it modified its Frequency Bias Setting in its ACE calculation as specified in Requirement R4 to demonstrate compliance with Requirement R4.

D. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority

The Regional Entity is the Compliance Enforcement Authority except where the responsible entity works for the Regional Entity. Where the responsible entity works for the Regional Entity, the Regional Entity will establish an agreement with the ERO or another entity approved by the ERO and FERC (i.e. another Regional Entity), to be responsible for compliance enforcement.

1.2. Compliance Monitoring and Assessment Processes:

Compliance Audits

Self-Certifications

Spot Checking

Compliance Investigation

Self-Reporting

Complaints

1.3. Data Retention

The following evidence retention periods identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

The Balancing Authority shall retain data or evidence to show compliance with Requirements R1, R2, R3 and R4, Measures M1, M2, M3 and M4 for the current year plus the previous three calendar years unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation.

The Frequency Response Sharing Group shall retain data or evidence to show compliance with Requirement R1 and Measure M1 for the current year plus the previous three calendar years unless directed by its Compliance Enforcement

Authority to retain specific evidence for a longer period of time as part of an investigation.

If a Balancing Authority or Frequency Response Sharing Group is found non-compliant, it shall keep information related to the non-compliance until found compliant or for the time period specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all subsequent requested and submitted records.

1.4. Additional Compliance Information

For Interconnections that are also Balancing Authorities, Tie Line Bias control and flat frequency control are equivalent and either is acceptable.

2.0 Violation Severity Levels

R#	Lower VSL	Medium VSL	High VSL	Severe VSL
R1	The summation of the Balancing Authorities' FRM within an Interconnection was equal to or more negative than the Interconnection's IFRO, and the Balancing Authority's, or Frequency Response Sharing Group's, FRM was less negative than its FRO by more than 1% but by at most 30% or 15 MW/0.1 Hz, whichever one is the greater deviation from its FRO	The summation of the Balancing Authorities' FRM within an Interconnection was equal to or more negative than the Interconnection's IFRO, and the Balancing Authority's, or Frequency Response Sharing Group's, FRM was less negative than its FRO by more than 30% or by more than 15 MW/0.1 Hz, whichever is the greater deviation from its FRO	The summation of the Balancing Authorities' FRM within an Interconnection did not meet its IFRO, and the Balancing Authority's, or Frequency Response Sharing Group's, FRM was less negative than its FRO by more than 1% but by at most 30% or 15 MW/0.1 Hz, whichever one is the greater deviation from its FRO	The summation of the Balancing Authorities' FRM within an Interconnection did not meet its IFRO, and the Balancing Authority's, or Frequency Response Sharing Group's, FRM was less negative than its FRO by more than 30% or by more than 15 MW/0.1 Hz, whichever is the greater deviation from its FRO
R2	The Balancing Authority in a multiple Balancing Authority Interconnection and not receiving Overlap Regulation	The Balancing Authority in a multiple Balancing Authority Interconnection and not receiving Overlap Regulation	The Balancing Authority in a multiple Balancing Authority Interconnection and not receiving Overlap Regulation	The Balancing Authority in a multiple Balancing Authority Interconnection and not receiving Overlap Regulation

Standard BAL-003-1 — Frequency Response and Frequency Bias Setting

	Service and uses a fixed Frequency Bias Setting failed to implement the validated Frequency Bias Setting value into its ACE calculation within the implementation period specified but did so within 5 calendar days from the implementation period specified by the ERO.	Service and uses a fixed Frequency Bias Setting implemented the validated Frequency Bias Setting value into its ACE calculation in more than 5 calendar days but less than or equal to 15 calendar days from the implementation period specified by the ERO.	Service and uses a fixed Frequency Bias Setting implemented the validated Frequency Bias Setting value into its ACE calculation in more than 15 calendar days but less than or equal to 25 calendar days from the implementation period specified by the ERO.	Service and uses a fixed Frequency Bias Setting did not implement the validated Frequency Bias Setting value into its ACE calculation in more than 25 calendar days from the implementation period specified by the ERO.
R3	The Balancing Authority that is a member of a multiple Balancing Authority Interconnection and is not receiving Overlap Regulation Service and uses a variable Frequency Bias Setting average Frequency Bias Setting during periods when the clock-minute average frequency was outside of the range 59.964 Hz to 60.036 Hz was less negative than its Frequency Response Obligation by more than 1% but by at most 10%.	The Balancing Authority that is a member of a multiple Balancing Authority Interconnection and not receiving Overlap Regulation Service and uses a variable Frequency Bias Setting average Frequency Bias Setting during periods when the clock-minute average frequency was outside of the range 59.964 Hz to 60.036 Hz was less negative than its Frequency Response Obligation by more than 10% but by at most 20%.	The Balancing Authority that is a member of a multiple Balancing Authority Interconnection and not receiving Overlap Regulation Service and uses a variable Frequency Bias Setting average Frequency Bias Setting during periods when the clock-minute average frequency was outside of the range 59.964 Hz to 60.036 Hz was less negative than its Frequency Response Obligation by more than 20% but by at most 30%.	The Balancing Authority that is a multiple Balancing Authority Interconnection and not receiving Overlap Regulation Service and uses a variable Frequency Bias Setting average Frequency Bias Setting during periods when the clock-minute average frequency was outside of the range 59.964 Hz to 60.036 Hz was less negative than its Frequency Response obligation by more than 30%..
R4	The Balancing Authority incorrectly changed the Frequency Bias Setting value used in its ACE calculation when providing	The Balancing Authority incorrectly changed the Frequency Bias Setting value used in its ACE calculation when providing	The Balancing Authority incorrectly changed the Frequency Bias Setting value used in its ACE calculation when providing	The Balancing Authority incorrectly changed the Frequency Bias Setting value used in its ACE calculation when providing

Standard BAL-003-1 — Frequency Response and Frequency Bias Setting

	Overlap Regulation Services with combined footprint setting-error less than or equal to 10% of the validated or calculated value.	Overlap Regulation Services with combined footprint setting-error more than 10% but less than or equal to 20% of the validated or calculated value.	Overlap Regulation Services with combined footprint setting-error more than 20% but less than or equal to 30% of the validated or calculated value.	Overlap Regulation Services with combined footprint setting-error more than 30% of the validated or calculated value. OR The Balancing Authority failed to change the Frequency Bias Setting value used in its ACE calculation when providing Overlap Regulation Services.
--	---	---	---	--

E. Regional Variance

None

F. Associated Documents

Procedure for ERO Support of Frequency Response and Frequency Bias Setting Standard

FRS Form 1

FRS Form 2

Frequency Response Standard Background Document

G. Version History

Version	Date	Action	Change Tracking
0	April 1, 2005	Effective Date	New
0	August 8, 2005	Removed "Proposed" from Effective Date	Errata
0	March 16, 2007	FERC Approval — Order 693	New
0a	December 19, 2007	Added Appendix 1 — Interpretation of R3 approved by BOT on October 23, 2007	Addition
0a	July 21, 2008	FERC Approval of Interpretation of R3	Addition

Standard BAL-003-1 — Frequency Response and Frequency Bias Setting

0b	February 12, 2008	Added Appendix 2 — Interpretation of R2, R2.2, R5, and R5.1 approved by BOT on February 12, 2008	Addition
0.1b	January 16, 2008	Section F: added “1.”; changed hyphen to “en dash.” Changed font style for “Appendix 1” to Arial; updated version number to “0.1b”	Errata
0.1b	October 29, 2008	BOT approved errata changes	Errata
0.1a	May 13, 2009	FERC Approved errata changes – version changed to 0.1a (Interpretation of R2, R2.2, R5, and R5.1 not yet approved)	Errata
0.1b	May 21, 2009	FERC Approved Interpretation of R2, R2.2, R5, and R5.1	Addition
1	February 7, 2013	Adopted by NERC Board of Trustees	Complete Revision under Project 2007-12
1	January 16, 2014	FERC Order issued approving BAL-003-1. (Order becomes effective for R2, R3, and R4 April 1, 2015. R1 becomes effective April 1, 2016.)	

Attachment A

BAL-003-1 Frequency Response & Frequency Bias Setting Standard

Supporting Document

Interconnection Frequency Response Obligation (IFRO)

The ERO, in consultation with regional representatives, has established a target contingency protection criterion for each Interconnection called the Interconnection Frequency Response Obligation (IFRO). The default IFRO listed in Table 1 is based on the resource contingency criteria (RCC), which is the largest category C (N-2) event identified except for the Eastern Interconnection, which uses the largest event in the last 10 years. A maximum delta frequency (MDF) is calculated by adjusting a starting frequency for each Interconnection by the following:

- Prevailing UFLS first step
- CC_{Adj} which is the adjustment for the differences between 1-second and sub-second Point C observations for frequency events. A positive value indicates that the sub-second C data is lower than the 1-second data
- CB_R which is the statistically determined ratio of the Point C to Value B
- BC'_{Adj} which is the statistically determined adjustment for the event nadir being below the Value B (Eastern Interconnection only) during primary frequency response withdrawal.

The IFRO for each Interconnection in Table 1 is then calculated by dividing the RCC MWs by 10 times the MDF. In the Eastern Interconnection there is an additional adjustment (BC'_{Adj}) for the event nadir being below the Value B due to primary frequency response withdrawal. This IFRO includes uncertainty adjustments at a 95 % confidence level. Detailed descriptions of the calculations used in Table 1 below are defined in the *Procedure for ERO Support of Frequency Response and Frequency Bias Setting Standard*.

Interconnection	Eastern	Western	ERCOT	HQ	Units
Starting Frequency (F_{Start})	59.974	59.976	59.963	59.972	Hz
Prevailing UFLS First Step	59.5*	59.5	59.3	58.5	Hz
Base Delta Frequency (DF_{Base})	0.474	0.476	0.663	1.472	Hz
CC_{ADJ}	0.007	0.004	0.012	N/A	Hz
Delta Frequency (DF_{CC})	0.467	0.472	0.651	1.472	Hz
CB_R	1.000	1.625	1.377	1.550	
Delta Frequency (DF_{CBR})	0.467	0.291	0.473	0.949	Hz
BC'_{ADJ}	0.018	N/A	N/A	N/A	Hz
Max. Delta Frequency (MDF)	0.449	0.291	0.473	0.949	
Resource Contingency Criteria (RCC)	4,500	2,740	2,750	1,700	MW
Credit for Load Resources (CLR)		300	1,400**		MW
IFRO	-1,002	-840	-286	-179	MW/0.1 Hz

Table 1: Interconnection Frequency Response Obligations

**The Eastern Interconnection UFLS set point listed is a compromise value set midway between the stable frequency minimum established in PRC-006-1 (59.3 Hz) and the local protection UFLS setting of 59.7 Hz used in Florida and Manitoba.*

***In the Base Obligation measure for ERCOT, 1400 MW (Load Resources triggered by Under Frequency Relays at 59.70 Hz) was reduced from its Resource Contingency Criteria level of 2750 MW to get 239 MW/0.1 Hz. This was reduced to accurately account for designed response from Load Resources within 30 cycles.*

An Interconnection may propose alternate IFRO protection criteria to the ERO by submitting a SAR with supporting technical documentation.

Balancing Authority Frequency Response Obligation (FRO) and Frequency Bias Setting

The ERO will manage the administrative procedure for annually assigning an FRO and implementation of the Frequency Bias Setting for each Balancing Authority. The annual timeline for all activities described in this section are shown below.

For a multiple Balancing Authority interconnection, the Interconnection Frequency Response Obligation shown in Table 1 is allocated based on the Balancing Authority annual load and annual generation. The FRO allocation will be based on the following method:

$$FRO_{BA} = IFRO \times \frac{\text{Annual Gen}_{BA} + \text{Annual Load}_{BA}}{\text{Annual Gen}_{Int} + \text{Annual Load}_{Int}}$$

Where:

- Annual Gen_{BA} is the total annual “Output of Generating Plants” within the Balancing Authority Area (BAA), on FERC Form 714, column c of Part II - Schedule 3.
- Annual Load_{BA} is total annual Load within the BAA, on FERC Form 714, column e of Part II - Schedule 3.
- Annual Gen_{Int} is the sum of all Annual Gen_{BA} values reported in that interconnection.
- Annual Load_{Int} is the sum of all Annual Load_{BA} values reported in that interconnection.

The data used for this calculation is from the most recently filed Form 714. As an example, a report to NERC in January 2013 would use the Form 714 data filed in 2012, which utilized data from 2011.

Balancing Authorities that are not FERC jurisdictional should use the Form 714 Instructions to assemble and submit equivalent data to the ERO for use in the FRO Allocation process.

Balancing Authorities that elect to form a FRSG will calculate a FRSG FRO by adding together the individual BA FRO’s.

Balancing Authorities that elect to form a FRSG as a means to jointly meet the FRO will calculate their FRM performance one of two ways:

- Calculate a group NI_A and measure the group response to all events in the reporting year on a single FRS Form 1, or
- Jointly submit the individual BAs’ Form 1s, with a summary spreadsheet that contains the sum of each participant’s individual event performance.

Standard BAL-003-1 — Frequency Response and Frequency Bias Setting

Balancing Authorities that merge or that transfer load or generation are encouraged to notify the ERO of the change in footprint and corresponding changes in allocation such that the net obligation to the Interconnection remains the same and so that CPS limits can be adjusted.

Each Balancing Authority reports its previous year's Frequency Response Measure (FRM), Frequency Bias Setting and Frequency Bias type (fixed or variable) to the ERO each year to allow the ERO to validate the revised Frequency Bias Settings on FRS Form 1. If the ERO posts the official list of events after the date specified in the timeline below, Balancing Authorities will be given 30 days from the date the ERO posts the official list of events to submit their FRS Form 1.

Once the ERO reviews the data submitted in FRS Form 1 and FRS Form 2 for all Balancing Authorities, the ERO will use FRS Form 1 data to post the following information for each Balancing Authority for the upcoming year:

- Frequency Bias Setting
- Frequency Response Obligation (FRO)

Once the data listed above is fully posted, the ERO will announce the three-day implementation period for changing the Frequency Bias Setting if it differs from that shown in the timeline below.

A BA using a fixed Frequency Bias Setting sets its Frequency Bias Setting to the greater of (in absolute value):

- Any number the BA chooses between 100% and 125% of its Frequency Response Measure as calculated on FRS Form 1
- Interconnection Minimum as determined by the ERO

For purposes of calculating the minimum Frequency Bias Setting, a Balancing Authority participating in a Frequency Response Sharing Group will need to calculate its stand-alone Frequency Response Measure using FRS Form 1 and FRS Form 2 to determine its minimum Frequency Bias Setting.

A Balancing Authority providing Overlap Regulation will report the historic peak demand and generation of its combined BAs' areas on FRS Form 1 as described in Requirement R4.

There are occasions when changes are needed to Bias Settings outside of the normal schedule. Examples are footprint changes between Balancing Authorities and major changes in load or generation or the formation of new Balancing Authorities. In such cases the changing Balancing Authorities will work with their Regions, NERC and the Resources Subcommittee to confirm appropriate changes to Bias Settings, FRO, CPS limits and Inadvertent Interchange balances.

If there is no net change to the Interconnection total Bias, the Balancing Authorities involved will agree on a date to implement their respective change in Bias Settings. The Balancing Authorities and ERO will also agree to the allocation of FRO such that the sum remains the same.

If there is a net change to the Interconnection total Bias, this will cause a change in CPS2 limits and FRO for other Balancing Authorities in the Interconnection. In this case, the ERO will notify the impacted Balancing Authorities of their respective changes and provide an implementation window for making the Bias Setting changes.

Frequency Response Measure (FRM)

The Balancing Authority will calculate its FRM from Single Event Frequency Response Data (SEFRD), defined as: "the data from an individual event from a Balancing Authority that is used to calculate its

Standard BAL-003-1 — Frequency Response and Frequency Bias Setting

Frequency Response, expressed in MW/0.1Hz” as calculated on FRS Form 2 for each event shown on FRS Form 1. The events in FRS Form 1 are selected by the ERO using the *Procedure for ERO Support of Frequency Response and Frequency Bias Setting Standard*. The SEFRD for a typical Balancing Authority in an Interconnection with more than one Balancing Authority is basically the change in its Net Actual Interchange on its tie lines with its adjacent Balancing Authorities divided by the change in Interconnection frequency. (Some Balancing Authorities may choose to apply corrections to their Net Actual Interchange (NA_i) values to account for factors such as nonconforming loads. FRS Form 1 and 2 shows the types of adjustments that are allowed. Note that with the exception of the Contingent BA column, any adjustments made must be made for all events in an evaluation year. As an example, if an entity has non-conforming loads and makes an adjustment for one event, all events must show the non-conforming load, even if the non-conforming load does not impact the calculation. This ensures that the reports are not utilizing the adjustments only when they are favorable to the BA.) The ERO will use a standardized sampling interval of approximately 16 seconds before the event up to the time of the event for the pre-event NA_i and frequency (A values) and approximately 20 to 52 seconds after the event for the post-event NA_i (B values) in the computation of SEFRD values, dependent on the data scan rate of the Balancing Authority’s Energy Management System (EMS).

All events listed on FRS Form 1 need to be included in the annual submission of FRS Forms 1 and 2. The only time a Balancing Authority should exclude an event is if its tie-line data or its Frequency data is corrupt or its EMS was unavailable. FRS Form 2 has instructions on how to correct the BA’s data if the given event is internal to the BA or if other authorized adjustments are used.

Assuming data entry is correct FRS Form 1 will automatically calculate the Balancing Authority’s FRM for the past 12 months as the median of the SEFRD values. A Balancing Authority electing to report as an FRSG or a provider of Overlap Regulation Service will provide an FRS Form 1 for the aggregate of its participants.

To allow Balancing authorities to plan its operations, events with a “Point C” that cause the Interconnection Frequency to be lower than that shown in Table 1 above (for example, an event in the Eastern Interconnection that causes the Interconnection Frequency to go to 59.4 Hz) or higher than an equal change in frequency going above 60 Hz may be included in the list of events for that interconnection. However, the calculation of the BA response to such an event will be adjusted to show a frequency change only to the Target Minimum Frequency shown in Table 1 above (in the previous example this adjustment would cause Frequency to be shown as 59.5 Hz rather than 59.4 HZ) or a high frequency amount of an equal quantity. Should such an event happen, the ERO will provide additional guidance.

Timeline for Balancing Authority Frequency Response and Frequency Bias Setting Activities

Described below is the timeline for the exchange of information between the ERO and Balancing Authorities (BA) to:

- Facilitate the assignment of BA Frequency Response Obligations (FRO)
- Calculate BA Frequency Response Measures (FRM)
- Determine BA Frequency Bias Settings (FBS)

Standard BAL-003-1 — Frequency Response and Frequency Bias Setting

Target Date	Activity
April 30	The ERO reviews candidate frequency events and selects frequency events for the first quarter (December to February).
May 10	Form1 is posted with selected events from the first quarter for BA usage by the ERO.
May 15	The BAs receive a request to provide load and generation data as described in Attachment A to support FRO assignments and determining minimum FBS for BAs.
July 15	The BAs provide load and generation data as described in Attachment A to the ERO.
July 30	The ERO reviews candidate frequency events and selects frequency events for the second quarter (March to May).
August 10	Form1 is posted with selected events from the first and second quarters for BA usage by the ERO.
October 30	The ERO reviews candidate frequency events and selects frequency events for the third quarter (June to August)
November 10	Form1 is posted with selected events from the first, second, and third quarters for BA usage by the ERO.
November 20	If necessary, the ERO provides any updates to the necessary Frequency Response.
November 20	The ERO provides the fractional responsibility of each BA for the Interconnection's FRO and Minimum FBS to the BAs.
January 30	The ERO reviews candidate frequency events and selects frequency events for the fourth quarter (September to November).
2 nd business day in February	Form1 is posted with all selected events for the year for BA usage by the ERO.
February 10	The ERO assigns FRO values to the BAs for the upcoming year.
March 7	BAs complete their frequency response sampling for all four quarters and their FBS calculation, returning the results to the ERO.
March 24	The ERO validates FBS values, computes the sum of all FBS values for each Interconnection, and determines L10 values for the CPS 2 criterion for each BA as applicable.
Any time during first 3 business days of April (unless specified otherwise by the ERO)	The BA implements any changes to their FBS and L10 value.

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

A. Introduction

1. **Title:** Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability
2. **Number:** MOD-025-2
3. **Purpose:** To ensure that accurate information on generator gross and net Real and Reactive Power capability and synchronous condenser Reactive Power capability is available for planning models used to assess Bulk Electric System (BES) reliability.
4. **Applicability:**
 - 4.1. Functional entities
 - 4.1.1 Generator Owner
 - 4.1.2 Transmission Owner that owns synchronous condenser(s)
 - 4.2. Facilities:

For the purpose of this standard, the term, “applicable Facility” shall mean any one of the following:

- 4.2.1 Individual generating unit greater than 20 MVA (gross nameplate rating) directly connected to the Bulk Electric System.
 - 4.2.2 Synchronous condenser greater than 20 MVA (gross nameplate rating) directly connected to the Bulk Electric System.
 - 4.2.3 Generating plant/Facility greater than 75 MVA (gross aggregate nameplate rating) directly connected to the Bulk Electric System.
5. **Effective Date:**
 - 5.1. In those jurisdictions where regulatory approval is required¹:
 - 5.1.1 By the first day of the first calendar quarter, two calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified at least 40 percent of its applicable Facilities.
 - 5.1.2 By the first day of the first calendar quarter, three calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified at least 60 percent of its applicable Facilities.
 - 5.1.3 By the first day of the first calendar quarter, four calendar years following applicable regulatory approval, or as otherwise made effective pursuant to

¹ Wind Farm Verification - If an entity has two wind sites, and verification of one site is complete, the entity is 50% complete regardless of the number of turbines at each site. A wind site is a group of wind turbines connected at a common point of interconnection or utilizing a common aggregate control system.

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified at least 80 percent of its applicable Facilities.

5.1.4 By the first day of the first calendar quarter, five calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified 100 percent of its applicable Facilities.

5.2. In those jurisdictions where regulatory approval is not required²:

5.2.1 By the first day of the first calendar quarter, two calendar years following Board of Trustees approval, each Generator Owner and Transmission Owner shall have verified at least 40 percent of its applicable Facilities.

5.2.2 By the first day of the first calendar quarter, three calendar years following Board of Trustees approval, each Generator Owner and Transmission Owner shall have verified at least 60 percent of its applicable Facilities.

5.2.3 By the first day of the first calendar quarter, four calendar years following Board of Trustees approval, each Generator Owner and Transmission Owner shall have verified at least 80 percent of its applicable Facilities.

5.2.4 By the first day of the first calendar quarter, five calendar years following Board of Trustees approval, each Generator Owner and Transmission Owner shall have verified 100 percent of its applicable Facilities.

Note: The verification percentage above is based on the number of applicable units owned.

² Wind farm verification - If an entity has two wind sites, and verification of one site is complete, the entity is 50% complete regardless of the number of turbines at each site. A wind site is a group of wind turbines connected at a common point of interconnection or utilizing a common aggregate control system.

Requirements

- R1.** Each Generator Owner shall provide its Transmission Planner with verification of the Real Power capability of its applicable Facilities as follows: *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- 1.1.** Verify the Real Power capability of its generating units in accordance with Attachment 1.
 - 1.2.** Submit a completed Attachment 2 (or a form containing the same information as identified in Attachment 2) to its Transmission Planner within 90 calendar days of either (i) the date the data is recorded for a staged test; or (ii) the date the data is selected for verification using historical operational data.
- R2.** Each Generator Owner shall provide its Transmission Planner with verification of the Reactive Power capability of its applicable Facilities as follows: *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- 2.1.** Verify, in accordance with Attachment 1, (i) the Reactive Power capability of its generating units and (ii) the Reactive Power capability of its synchronous condenser units.
 - 2.2.** Submit a completed Attachment 2 (or a form containing the same information as identified in Attachment 2) to its Transmission Planner within 90 calendar days of either (i) the date the data is recorded for a staged test; or (ii) the date the data is selected for verification using historical operational data.
- R3.** Each Transmission Owner shall provide its Transmission Planner with verification of the Reactive Power capability of its applicable Facilities as follows: *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- 3.1.** Verify, in accordance with Attachment 1, the Reactive Power capability of its synchronous condenser units.
 - 3.2.** Submit a completed Attachment 2 (or a form containing the same information as identified in Attachment 2) to its Transmission Planner within 90 calendar days of either (i) the date the data is recorded for a staged test; or (ii) the date the data is selected for verification using historical operational data.

B. Measures

- M1.** Each Generator Owner will have evidence that it performed the verification, such as a completed Attachment 2 or the Generator Owner form with the same information or dated information collected and used to complete attachments, and will have evidence that it submitted the information within 90 days to its Transmission Planner; such as dated electronic mail messages or mail receipts in accordance with Requirement R1.
- M2.** Each Generator Owner will have evidence that it performed the verification, such as a completed Attachment 2 or the Generator Owner form with the same information, or dated information collected and used to complete attachments and will have evidence that it submitted the information within 90 days to its Transmission Planner; such as dated electronic mail messages or mail receipts in accordance with Requirement R2.

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

- M3.** Each Transmission Owner will have evidence that it performed the verification, such as a completed Attachment 2 or the Transmission Owner form with equivalent information or dated information collected and used to complete attachments, and will have evidence that it submitted the information within 90 days to its Transmission Planner; such as dated electronic mail messages or mail receipts in accordance with Requirement R3.

C. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority

The Regional Entity shall serve as the Compliance enforcement authority unless the applicable entity is owned, operated, or controlled by the Regional Entity. In such cases the ERO or a Regional entity approved by FERC or other applicable governmental authority shall serve as the CEA.

1.2. Evidence Retention

The following evidence retention periods identify a period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention specified below is shorter than the time since the last compliance audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

The Generator Owner and Transmission Owner shall each keep the data or evidence to show compliance as identified below, unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- The Generator Owner shall retain the latest MOD-025 Attachment 2 and the data behind Attachment 2 or Generator Owner form with equivalent information and submittal evidence for Requirements R1 and R2, Measures M1 and M2 for the time period since the last compliance audit.
- The Transmission Owner shall retain the latest MOD-025 Attachment 2 and the data behind Attachment 2 or Transmission Owner form with equivalent information and submittal evidence for Requirement R3, Measure M3 for the time period since the last compliance audit.

If a Generator Owner or Transmission Owner is found noncompliant, it shall keep information related to the noncompliance until mitigation is complete or for the time specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Assessment Processes

Compliance Audit

Self-Certification

Spot Checking

Compliance Investigation

Self-Reporting

Complaint

1.4. Additional Compliance Information

None

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

2. Violation Severity Levels

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	<p>The Generator Owner verified and recorded the Real Power capability of its applicable generating unit, but submitted the data to its Transmission Planner more than 90 calendar days, but within 120 calendar days, of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Generator Owner verified the Real Power capability, per Attachment 1 and submitted the data but was missing 1 to less than or equal to 33 percent of the data.</p>	<p>The Generator Owner verified and recorded the Real Power capability of its applicable generating unit, but submitted the data to its Transmission Planner more than 120 calendar days, but within 150 calendar days, of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Generator Owner verified the Real Power capability, per Attachment 1 and submitted the data but was missing more than 33 to 66 percent of the data.</p>	<p>The Generator Owner verified and recorded the Real Power capability of its applicable generating unit, but submitted the data to its Transmission Planner more than 150 calendar days, but within 180 calendar days, of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Generator Owner verified the Real Power capability, per Attachment 1 and submitted the data but was missing from 67 to 99 percent of the data.</p> <p>OR</p>	<p>The Generator Owner verified and recorded the Real Power capability of its applicable generating unit, but submitted the data to its Transmission Planner more than 180 calendar days of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Generator Owner failed to verify the Real Power capability, per Attachment 1 of an applicable generating unit.</p> <p>OR</p> <p>The Generator Owner performed the Real Power verification per Attachment 1, “Periodicity for conducting a new verification” item</p>

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

	<p>OR</p> <p>The Generator Owner performed the Real Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 66 calendar months but less than or equal to 69 months.</p> <p>OR</p> <p>The Generator Owner performed the Real Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 12 calendar months but less than or equal to 13 calendar months.</p>	<p>OR</p> <p>The Generator Owner performed the Real Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 69 calendar months but less than or equal to 72 months.</p> <p>OR</p> <p>The Generator Owner performed the Real Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 13 calendar months but less than or equal to 14 calendar months.</p>	<p>The Generator Owner performed the Real Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 72 calendar months but less than or equal to 75 months.</p> <p>OR</p> <p>The Generator Owner performed the Real Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 14 calendar months but less than or equal to 15 calendar months.</p>	<p>1 or item 2 (5 year requirement) but did so in more than 75 calendar months.</p> <p>OR</p> <p>The Generator Owner performed the Real Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 15 calendar months.</p>
R2	The Generator Owner verified and recorded the	The Generator Owner verified and recorded the	The Generator Owner verified and recorded the Reactive	The Generator Owner verified and recorded the Reactive Power

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

<p>Reactive Power capability of its applicable generating unit or applicable synchronous condenser, but submitted the data to its Transmission Planner more than 90 calendar days, but within 120 calendar days, of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Generator Owner verified the Reactive Power capability, per Attachment 1 and submitted the data but was missing 1 to up to and including 33 percent of the data.</p> <p>OR</p> <p>The Generator Owner performed the Reactive Power verification per</p>	<p>Reactive Power capability of its applicable generating unit or applicable synchronous condenser, but submitted the data to its Transmission Planner more than 120 calendar days, but within 150 calendar days, of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Generator Owner verified the Reactive Power capability, per Attachment 1 and submitted the data but was missing 34 to 66 percent of the data.</p> <p>OR</p> <p>The Generator Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2</p>	<p>Power capability of its applicable generating unit or applicable synchronous condenser, but submitted the data to its Transmission Planner more than 150 calendar days, but within 180 calendar days, of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Generator Owner verified the Reactive Power capability, per Attachment 1 and submitted the data but was missing 67 to 99 percent of the data.</p> <p>OR</p> <p>The Generator Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 72</p>	<p>capability of its applicable generating unit or applicable synchronous condenser, but submitted the data to its Transmission Planner more than 180 calendar days of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Generator Owner failed to verify the Reactive Power capability, per Attachment 1 of an applicable generating unit or synchronous condenser unit.</p> <p>OR</p> <p>The Generator Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 75 calendar months.</p> <p>OR</p>
---	--	---	--

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

	<p>Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 66 calendar months but less than or equal to 69 months.</p> <p>OR</p> <p>The Generator Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 12 calendar months but less than or equal to 13 calendar months.</p>	<p>(5 year requirement) but did so in more than 69 calendar months but less than or equal to 72 months.</p> <p>OR</p> <p>The Generator Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 13 calendar months but less than or equal to 14 calendar months.</p>	<p>calendar months but less than or equal to 75 months.</p> <p>OR</p> <p>The Generator Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 14 calendar months but less than or equal to 15 calendar months.</p>	<p>The Generator Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 15 calendar months.</p>
R3	<p>The Transmission Owner verified and recorded the Reactive Power capability of its applicable synchronous condenser, but submitted the data to its Transmission Planner more</p>	<p>The Transmission Owner verified and recorded the Reactive Power capability of its applicable synchronous condenser, but submitted the data to its Transmission Planner more than 120</p>	<p>The Transmission Owner verified and recorded the Reactive Power capability of an applicable synchronous condenser unit, but submitted the data to its Transmission Planner more than 150</p>	<p>The Transmission Owner verified and recorded the Reactive Power capability of its applicable synchronous condenser, but submitted the data to its Transmission Planner more than 180 calendar days of the date the data is</p>

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

<p>than 90 calendar days, but within 120 calendar days, of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Transmission Owner verified the Reactive Power capability, per Attachment 1 and submitted the data but was missing 1 to up to and including 33 percent of the data.</p> <p>OR</p> <p>The Transmission Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 66 calendar months but less</p>	<p>calendar days, but within 150 calendar days, of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Transmission Owner verified the Reactive Power capability, per Attachment 1 and submitted the data but was missing 34 to 66 percent of the data.</p> <p>OR</p> <p>The Transmission Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 69 calendar months but less than or equal to 72 months.</p>	<p>calendar days, but within 180 calendar days, of the date the data is recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Transmission Owner verified the Reactive Power capability, per Attachment 1 and submitted the data but was missing 67 to 99 percent of the data.</p> <p>OR</p> <p>The Transmission Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 72 calendar months but less than or equal to 75 months.</p>	<p>recorded for a staged test or the date the data is selected for verification using historical operational data.</p> <p>OR</p> <p>The Transmission Owner failed to verify the Reactive Power capability, per Attachment 1 of an applicable synchronous condenser unit.</p> <p>OR</p> <p>The Transmission Owner performed the verification per Attachment 1, “Periodicity for conducting a new verification” item 1 or item 2 (5 year requirement) but did so in more than 75 calendar months.</p> <p>OR</p> <p>The Transmission Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 15calendar months.</p>
--	---	---	---

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

	<p>than or equal to 69 months.</p> <p>OR</p> <p>The Transmission Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 12 calendar months but less than or equal to 13 calendar months.</p>	<p>OR</p> <p>The Transmission Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 13 calendar months but less than or equal to 14 calendar months.</p>	<p>OR</p> <p>The Transmission Owner performed the Reactive Power verification per Attachment 1, “Periodicity for conducting a new verification” item 1, 2 or 3 (12 calendar month requirement) but did so in more than 14 calendar months but less than or equal to 15 calendar months.</p>	
--	--	---	---	--

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

D. Regional Variances

None

E. Associated Documents

Version History

Version	Date	Action	Change Tracking
1	12/1/2005	<ol style="list-style-type: none"> 1. Changed tabs in footer. 2. Removed comma after 2004 in “Development Steps Completed,” #1. 3. Changed incorrect use of certain hyphens (-) to “en dash” (–) and “em dash (—).” 4. Added “periods” to items where appropriate. 5. Changed apostrophes to “smart” symbols. 6. Changed “Timeframe” to “Time Frame” in item D, 1.2. 7. Lower cased all instances of “regional” in section D.3. 8. Removed the word “less” after 94% in section 3.4. Level 4. 	01/20/06
2	February 7, 2013	Adopted by NERC Board of Trustees	Revised per SAR for Project 2007-09 and combined with MOD-024-1
2	March 20, 2014	FERC Order issued approving MOD-025-2. (Order becomes effective on 7/1/16.)	

MOD-025 Attachment 1 – Verification of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

Periodicity for conducting a new verification:

The periodicity for performing Real and Reactive Power capability verification is as follows:

1. For staged verification; verify each applicable Facility at least every five years (with no more than 66 calendar months between verifications), or within 12 calendar months of the discovery of a change that affects its Real Power or Reactive Power capability by more than 10 percent of the last reported verified capability and is expected to last more than six months. The first verification for each applicable Facility under this standard must be a staged test.
2. For verification using operational data; verify each applicable Facility at least every five years (with no more than 66 calendar months between verifications), or within 12 calendar months following the discovery that its Real Power or Reactive Power capability has changed by more than 10 percent of the last reported verified capability and is expected to last more than six months. If data for different points is recorded on different days, designate the earliest of those dates as the verification date, and report that date as the verification date on MOD-025, Attachment 2 for periodicity purposes.
3. For either verification method, verify each new applicable Facility within 12 calendar months of its commercial operation date. Existing units that have been in long term shut down and have not been tested for more than five years shall be verified within 12 calendar months.

It is intended that Real Power testing be performed at the same time as full load Reactive Power testing, however separate testing is allowed for this standard. For synchronous condensers, perform only the Reactive Power capability verifications as specified below.

If the Reactive Power capability is verified through test, it is to be scheduled at a time advantageous for the unit being verified to demonstrate its Reactive Power capabilities while the Transmission Operator takes measures to maintain the plant's system bus voltage at the scheduled value or within acceptable tolerance of the scheduled value.

Verification specifications for applicable Facilities:

1. For generating units of 20 MVA or less that are part of a plant greater than 75 MVA in aggregate, record data either on an individual unit basis or as a group. Perform verification individually for every generating unit or synchronous condenser greater than 20 MVA (gross nameplate rating).
2. Verify with all auxiliary equipment needed for expected normal operation in service for both the Real Power and Reactive Power capability verification. Perform verification with the automatic voltage regulator in service for the Reactive Power capability

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

verification. Operational data from within the two years prior to the verification date is acceptable for the verification of either the Real Power or the Reactive Power capability, as long as a) that operational data meets the criteria in 2.1 through 2.4 below and b) the operational data demonstrates at least 90 percent of a previously staged test that demonstrated at least 50 percent of the Reactive capability shown on the associated thermal capability curve (D-curve). If the previously staged test was unduly restricted (so that it did not demonstrate at least 50 percent of the associated thermal capability curve) by unusual generation or equipment limitations (e.g., capacitor or reactor banks out of service), then the next verification will be by another staged test, not operational data:

- 2.1.** Verify Real Power capability and Reactive Power capability over-excited (lagging) of all applicable Facilities at the applicable Facilities' normal (not emergency) expected maximum Real Power output at the time of the verifications.
 - 2.1.1** Verify synchronous generating unit's maximum real power and lagging reactive power for a minimum of one hour.
 - 2.1.2** Verify variable generating units, such as wind, solar, and run of river hydro, at the maximum Real Power output the variable resource can provide at the time of the verification. Perform verification of Reactive Power capability of wind turbines and photovoltaic inverters with at least 90 percent of the wind turbines or photovoltaic inverters at a site on-line. If verification of wind turbines or photovoltaic inverter Facility cannot be accomplished meeting the 90 percent threshold, document the reasons the threshold was not met and test to the full capability at the time of the test. Reschedule the test of the facility within six months of being able to reach the 90 percent threshold. Maintain, as steady as practical, Real and Reactive Power output during verifications.
- 2.2.** Verify Reactive Power capability of all applicable Facilities, other than wind and photovoltaic, for maximum overexcited (lagging) and under-excited (leading) reactive capability for the following conditions:
 - 2.2.1** At the minimum Real Power output at which they are normally expected to operate collect maximum leading and lagging reactive values as soon as a limit is reached.
 - 2.2.2** At maximum Real Power output collect maximum leading reactive values as soon as a limit is reached.
 - 2.2.3** Nuclear Units are not required to perform Reactive Power verification at minimum Real Power output.
- 2.3.** For hydrogen-cooled generators, perform the verification at normal operating hydrogen pressure.
- 2.4.** Calculate the Generator Step-Up (GSU) transformer losses if the verification measurements are taken from the high side of the GSU transformer. GSU

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

transformer real and reactive losses may be estimated, based on the GSU impedance, if necessary.

3. Record the following data for the verifications specified above:
 - 3.1. The value of the gross Real and Reactive Power generating capabilities at the end of the verification period.
 - 3.2. The voltage schedule provided by the Transmission Operator, if applicable.
 - 3.3. The voltage at the high and low side of the GSU and/or system interconnection transformer(s) at the end of the verification period. If only one of these values is metered, the other may be calculated.
 - 3.4. The ambient conditions, if applicable, at the end of the verification period that the Generator Owner requires to perform corrections to Real Power for different ambient conditions such as:
 - Ambient air temperature
 - Relative humidity
 - Cooling water temperature
 - Other data as determined to be applicable by the Generator Owner to perform corrections for ambient conditions.
 - 3.5. The date and time of the verification period, including start and end time in hours and minutes.
 - 3.6. The existing GSU and/or system interconnection transformer(s) voltage ratio and tap setting.
 - 3.7. The GSU transformer losses (real or reactive) if the verification measurements were taken from the high side of the GSU transformer.
 - 3.8. Whether the test data is a result of a staged test or if it is operational data.
4. Develop a simplified key one-line diagram (refer to MOD-025, Attachment 2) showing sources of auxiliary Real and Reactive Power and associated system connections for each unit verified. Include GSU and/or system Interconnection and auxiliary transformers. Show Reactive Power flows, with directional arrows.
 - 4.1. If metering does not exist to measure specific Reactive auxiliary load(s), provide an engineering estimate and associated calculations. Transformer Real and Reactive Power losses will also be estimates or calculations. Only output data are required when using a computer program to calculate losses or loads.
5. If an adjustment is requested by the Transmission Planner, then develop the relationships between test conditions and generator output so that the amount of Real Power that can be expected to be delivered from a generator can be determined at different conditions, such as peak summer conditions. Adjust MW values tested to the ambient conditions specified by the Transmission Planner upon request and submit them to the Transmission Planner within 90 days of the request or the date the data was recorded/selected whichever is later.

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

- Note 1: Under some transmission system conditions, the data points obtained by the Mvar verification required by the standard will not duplicate the manufacturer supplied thermal capability curve (D-curve). However, the verification required by the standard, even when conducted under these transmission system conditions, may uncover applicable Facility limitations; such as rotor thermal instability, improper tap settings or voltage ratios, inaccurate AVR operation, etc., which could be further analyzed for resolution. The Mvar limit level(s) achieved during a staged test or from operational data may not be representative of the unit's reactive capability for extreme system conditions. See Note 2.
- Note 2: While not required by the standard, it is desirable to perform engineering analyses to determine expected applicable Facility capabilities under less restrictive system voltages than those encountered during the verification. Even though this analysis will not verify the complete thermal capability curve (D-curve), it provides a reasonable estimate of applicable Facility capability that the Transmission Planner can use for modeling.
- Note 3: The Reactive Power verification is intended to define the limits of the unit's Reactive Power capabilities. If a unit has no leading capability, then it should be reported with no leading capability; or the minimum lagging capability at which it can operate.
- Note 4: Synchronous Condensers only need to be tested at two points (one over-excited point and one under-excited point) since they have no Real Power output.

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

MOD-025 Attachment 2

One-line Diagram, Table, and Summary for Verification Information Reporting

Note: If the configuration of the applicable Facility does not lend itself to the use of the diagram, tables, or summaries for reporting the required information, changes may be made to this form, provided that all required information (identified in MOD-025, Attachment 1) is reported.

Company:

Reported By (name):

Plant:


Unit No.:

Date of Report:

Check all that apply:

- Over-excited Full Load Reactive Power Verification
- Under-excited Full Load Reactive Power Verification
- Over-excited Minimum Load Reactive Power Verification
- Under-excited Minimum Load Reactive Power Verification
- Real Power Verification
- Staged Test Data
- Operational Data

Simplified one-line diagram showing plant auxiliary Load connections and verification data:

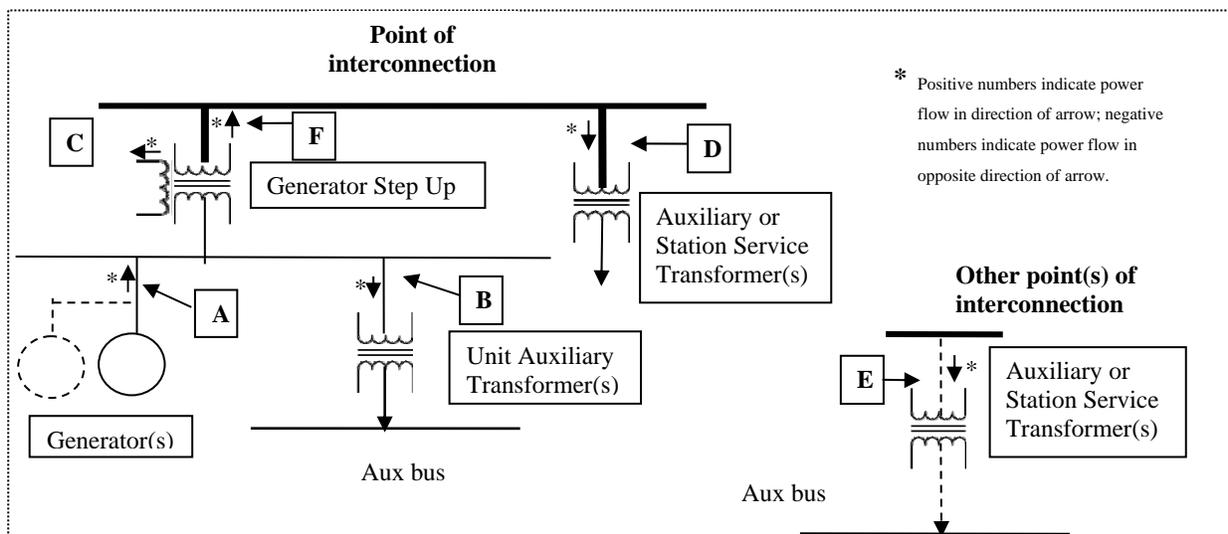

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

Point	Voltage	Real Power	Reactive Power	Comment
A	kV	MW	Mvar	Sum multiple generators that are verified together or are part of the same unit. Report individual unit values separately whenever the verification measurements were taken at the individual unit. Individual values are required for units or synchronous condensers > 20 MVA.
Identify calculated values, if any:				
B	kV	MW	Mvar	Sum multiple unit auxiliary transformers.
Identify calculated values, if any:				
C	kV	MW	Mvar	Sum multiple tertiary Loads, if any.
Identify calculated values, if any:				
D	kV	MW	Mvar	Sum multiple auxiliary and station service transformers.
Identify calculated values, if any:				
E	kV	MW	Mvar	If multiple points of Interconnection, describe these for accurate modeling; report points individually (sum multiple auxiliary transformers).
F	kV	MW	Mvar	Net unit capability
Identify calculated values, if any:				

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

MOD-025 -Attachment 2 (continued)

Verification Data

Provide data by unit or Facility, as appropriate

Data Type	Data Recorded	Last Verification (Previous Data; will be blank for the initial verification)
Gross Reactive Power Capability (*Mvar)		
Aux Reactive Power (*Mvar)		
Net Reactive Power Capability (*Mvar) equals Gross Reactive Power Capability (*Mvar) minus Aux Reactive Power connected at the same bus (*Mvar) minus tertiary Reactive Power connected at the same bus(*Mvar)		
Gross Real Power Capability (*MW)		
Aux Real Power (*MW)		
Net Real Power Capability (*MW) equals Gross Real Power Capability (*MW) minus Aux Real Power connected at the same bus (*MW) minus tertiary Real Power connected at the same bus(*MW)		
* Note: Enter values at the end of the verification period.		
GSU losses (only required if verification measurements are taken on the high side of the GSU - Mvar)		

Summary of Verification

- Date of Verification _____, Verification Start Time _____, Verification End Time _____
- Scheduled Voltage _____
- Transformer Voltage Ratio: GSU _____, Unit Aux _____, Station Aux _____, Other Aux _____
- Transformer Tap Setting: GSU _____, Unit Aux _____, Station Aux _____, Other Aux _____
- Ambient conditions at the end of the verification period:
 - Air temperature: _____
 - Humidity: _____
 - Cooling water temperature: _____
 - Other data as applicable: _____

Standard MOD-025-2 — Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability

- Generator hydrogen pressure at time of test (if applicable) _____

Date that data shown in last verification column in table above was taken _____

Remarks :

Note: If the verification value did not reach the thermal capability curve (D-curve), describe the reason.

A. Introduction

1. **Title:** Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions
2. **Number:** MOD-026-1
3. **Purpose:** To verify that the generator excitation control system or plant volt/var control function¹ model (including the power system stabilizer model and the impedance compensator model) and the model parameters used in dynamic simulations accurately represent the generator excitation control system or plant volt/var control function behavior when assessing Bulk Electric System (BES) reliability.

4. **Applicability:**

4.1. Functional Entities:

- 4.1.1 Generator Owner
- 4.1.2 Transmission Planner

4.2. Facilities:

For the purpose of the requirements contained herein, Facilities that are directly connected to the Bulk Electric System (BES) will be collectively referred as an “applicable unit” that meet the following:

- 4.2.1 Generation in the Eastern or Quebec Interconnections with the following characteristics:
 - 4.2.1.1 Individual generating unit greater than 100 MVA (gross nameplate rating).
 - 4.2.1.2 Individual generating plant consisting of multiple generating units that are directly connected at a common BES bus with total generation greater than 100 MVA (gross aggregate nameplate rating).
- 4.2.2 Generation in the Western Interconnection with the following characteristics:
 - 4.2.2.1 Individual generating unit greater than 75 MVA (gross nameplate rating).
 - 4.2.2.2 Individual generating plant consisting of multiple generating units that are directly connected at a common BES bus with total generation greater than 75 MVA (gross aggregate nameplate rating).

¹ Excitation control system or plant volt/var control function:

- a. For individual synchronous machines, the generator excitation control system includes the generator, exciter, voltage regulator, impedance compensation and power system stabilizer.
- b. For an aggregate generating plant, the volt/var control system includes the voltage regulator & reactive power control system controlling and coordinating plant voltage and associated reactive capable resources.

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

- 4.2.3** Generation in the ERCOT Interconnection with the following characteristics:
- 4.2.3.1** Individual generating unit greater than 50 MVA (gross nameplate rating).
 - 4.2.3.2** Individual generating plant consisting of multiple generating units that are directly connected at a common BES bus with total generation greater than 75 MVA (gross aggregate nameplate rating).
- 4.2.4** For all Interconnections:
- A technically justified² unit that meets NERC registry criteria but is not otherwise included in the above Applicability sections 4.2.1, 4.2.2, or 4.2.3 and is requested by the Transmission Planner.

5. Effective Date:

- 5.1.** For Requirements R1, and R3 through R6, the first day of the first calendar quarter beyond the date that this standard is approved by applicable regulatory authorities or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities. In those jurisdictions where regulatory approval is not required, the standard shall become effective on the first day of the first calendar quarter beyond the date this standard is approved by the NERC Board of Trustees, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities.
- 5.2.** For Requirement R2, 30 percent of the entity's applicable unit gross MVA for each Interconnection on the first day of the first calendar quarter that is four years following applicable regulatory approval or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, or in those jurisdictions where no regulatory approval is required, on the first day of the first calendar quarter that is four years following NERC Board of Trustees adoption or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities.
- 5.3.** For Requirement R2, 50 percent of the entity's applicable unit gross MVA for each Interconnection on first day of the first calendar quarter that is six years following applicable regulatory approval or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, or in those jurisdictions where no regulatory approval is required, on the first day of the first calendar quarter that is six years following NERC Board of Trustees adoption or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities.
- 5.4.** For Requirement R2, 100 percent of the entity's applicable unit gross MVA for each Interconnection on the first day of the first calendar quarter that is 10 years

² Technical justification is achieved by the Transmission Planner demonstrating that the simulated unit or plant response does not match the measured unit or plant response.

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

following applicable regulatory approval or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, or in those jurisdictions where no regulatory approval is required, on the first day of the first calendar quarter that is 10 years following NERC Board of Trustees adoption or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities.

B. Requirements

- R1.** Each Transmission Planner shall provide the following requested information to the Generator Owner within 90 calendar days of receiving a written request : *[Violation Risk Factor: Lower] [Time Horizon: Operations Planning]*
- Instructions on how to obtain the list of excitation control system or plant volt/var control function models that are acceptable to the Transmission Planner for use in dynamic simulation,
 - Instructions on how to obtain the dynamic excitation control system or plant volt/var control function model library block diagrams and/or data sheets for models that are acceptable to the Transmission Planner, or
 - Model data for any of the Generator Owner’s existing applicable unit specific excitation control system or plant volt/var control function contained in the Transmission Planner’s dynamic database from the current (in-use) models, including generator MVA base.
- R2.** Each Generator Owner shall provide for each applicable unit, a verified generator excitation control system or plant volt/var control function model, including documentation and data (as specified in Part 2.1) to its Transmission Planner in accordance with the periodicity specified in MOD-026 Attachment 1. *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- 2.1.** Each applicable unit’s model shall be verified by the Generator Owner using one or more models acceptable to the Transmission Planner. Verification for individual units less than 20 MVA (gross nameplate rating) in a generating plant (per Section 4.2.1.2, 4.2.2.2, or 4.2.3.2) may be performed using either individual unit or aggregate unit model(s), or both. Each verification shall include the following:
- 2.1.1.** Documentation demonstrating the applicable unit’s model response matches the recorded response for a voltage excursion from either a staged test or a measured system disturbance,
 - 2.1.2.** Manufacturer, model number (if available), and type of the excitation control system including, but not limited to static, AC brushless, DC rotating, and/or the plant volt/var control function (if installed),
 - 2.1.3.** Model structure and data including, but not limited to reactance, time constants, saturation factors, total rotational inertia, or equivalent data for the generator,

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

- 2.1.4. Model structure and data for the excitation control system, including the closed loop voltage regulator if a closed loop voltage regulator is installed or the model structure and data for the plant volt/var control function system,
 - 2.1.5. Compensation settings (such as droop, line drop, differential compensation), if used, and
 - 2.1.6. Model structure and data for power system stabilizer, if so equipped.
- R3.** Each Generator Owner shall provide a written response to its Transmission Planner within 90 calendar days of receiving one of the following items for an applicable unit:
- Written notification from its Transmission Planner (in accordance with Requirement R6) that the excitation control system or plant volt/var control function model is not usable,
 - Written comments from its Transmission Planner identifying technical concerns with the verification documentation related to the excitation control system or plant volt/var control function model, or
 - Written comments and supporting evidence from its Transmission Planner indicating that the simulated excitation control system or plant volt/var control function model response did not match the recorded response to a transmission system event.

The written response shall contain either the technical basis for maintaining the current model, the model changes, or a plan to perform model verification³ (in accordance with Requirement R2). [*Violation Risk Factor: Lower*] [*Time Horizon: Operations Planning*]

- R4.** Each Generator Owner shall provide revised model data or plans to perform model verification⁴ (in accordance with Requirement R2) for an applicable unit to its Transmission Planner within 180 calendar days of making changes to the excitation control system or plant volt/var control function that alter the equipment response characteristic.⁵ [*Violation Risk Factor: Lower*] [*Time Horizon: Operations Planning*]

³ If verification is performed, the 10-year period as outlined in MOD-026 Attachment 1 is reset.

⁴ Ibid

⁵ Exciter, voltage regulator, plant volt/var or power system stabilizer control replacement including software alterations that alter excitation control system equipment response, plant digital control system addition or replacement, plant digital control system software alterations that alter excitation control system equipment response, plant volt/var function equipment addition or replacement (such as static var systems, capacitor banks, individual unit excitation systems, etc), a change in the voltage control mode (such as going from power factor control to automatic voltage control, etc), exciter, voltage regulator, impedance compensator, or power system stabilizer settings change. Automatic changes in settings that occur due to changes in operating mode do not apply to Requirement R4.

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

- R5.** Each Generator Owner shall provide a written response to its Transmission Planner, within 90 calendar days following receipt of a technically justified⁶ unit request from the Transmission Planner to perform a model review of a unit or plant that includes one of the following: [*Violation Risk Factor: Lower*] [*Time Horizon: Operations Planning*]
- Details of plans to verify the model (in accordance with Requirement R2), or
 - Corrected model data including the source of revised model data such as discovery of manufacturer test values to replace generic model data or updating of data parameters based on an on-site review of the equipment.
- R6.** Each Transmission Planner shall provide a written response to the Generator Owner within 90 calendar days of receiving the verified excitation control system or plant volt/var control function model information in accordance with Requirement R2 that the model is usable (meets the criteria specified in Parts 6.1 through 6.3) or is not usable.
- 6.1.** The excitation control system or plant volt/var control function model initializes to compute modeling data without error,
- 6.2.** A no-disturbance simulation results in negligible transients, and
- 6.3.** For an otherwise stable simulation, a disturbance simulation results in the excitation control and plant volt/var control function model exhibiting positive damping.

If the model is not usable, the Transmission Planner shall provide a technical description of why the model is not usable. [*Violation Risk Factor: Medium*] [*Time Horizon: Operations Planning*]

C. Measures

- M1.** The Transmission Planner must have and provide the dated request for instructions or data, the transmitted instructions or data, and dated evidence of a written transmittal (e.g., electronic mail message, postal receipt, or confirmation of facsimile) as evidence that it provided the request within 90 calendar days in accordance with Requirement R1.
- M2.** The Generator Owner must have and provide dated evidence it verified each generator excitation control system or plant volt/var control function model according to Part 2.1 for each applicable unit and a dated transmittal (e.g., electronic mail message, postal receipt, or confirmation of facsimile) as evidence it provided the model, documentation, and data to its Transmission Planner, in accordance with Requirement R2.
- M3.** Evidence for Requirement R3 must include the Generator Owner's dated written response containing the information identified in Requirement R3 and dated evidence

⁶ Technical justification is achieved by the Transmission Planner demonstrating that the simulated unit or plant response does not match the measured unit or plant response.

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

of transmittal (e.g., electronic mail message, postal receipt, or confirmation of facsimile) of the response.

- M4.** Evidence for Requirement R4 must include, for each of the Generator Owner's applicable units for which system changes specified in Requirement R4 were made, a dated revised model data or plans to perform a model verification and dated evidence (e.g., electronic mail message, postal receipt, or confirmation of facsimile) it provided the revised model and data or plans within 180 calendar days of making changes.
- M5.** Evidence for Requirement R5 must include the Generator Owner's dated written response containing the information identified in Requirement R5 and dated evidence (e.g., electronic mail message, postal receipt, or confirmation of facsimile) it provided a written response within 90 calendar days following receipt of a technically justified request.
- M6.** Evidence of Requirement R6 must include, for each model received, the dated response indicating the model was usable or not usable according to the criteria specified in Parts 6.1 through 6.3 and for a model that is not usable, a technical description; and dated evidence of transmittal (e.g., electronic mail message, postal receipt, or confirmation of facsimile) that the Generator Owner was notified within 90 calendar days of receipt of model information.

D. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority

The Regional Entity shall serve as the Compliance Enforcement Authority unless the applicable entity is owned, operated, or controlled by the Regional Entity. In such cases the ERO or a Regional entity approved by FERC or other applicable governmental authority shall serve as the CEA.

1.2. Data Retention

The following evidence retention periods identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

The Generator Owner and Transmission Planner shall each keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- The Transmission Planner shall retain the information/data request and provided response evidence of Requirements R1 and R6, Measures M1 and M6 for three calendar years from the date the document was provided.

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

- The Generator Owner shall retain the latest excitation control system or plant volt/var control function model verification evidence of Requirement R2, Measure M2.
- The Generator Owner shall retain the information/data request and provided response evidence of Requirements R3 through R5, and Measures M3 through M5 for three calendar years from the date the document was provided.

If a Generator Owner or Transmission Planner is found non-compliant, it shall keep information related to the non-compliance until mitigation is complete or approved or for the time specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Assessment Processes

Compliance Audit

Self-Certification

Spot Checking

Compliance Investigation

Self-Reporting

Complaints

1.4. Additional Compliance Information

None

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

2. Violation Severity Levels

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	The Transmission Planner provided the instructions and data to the Generator Owner more than 90 calendar days but less than or equal to 120 calendar days of receiving a written request.	The Transmission Planner provided the instructions and data to the Generator Owner more than 120 calendar days but less than or equal to 150 calendar days of receiving a written request.	The Transmission Planner provided the instructions and data to the Generator Owner more than 150 calendar days but less than or equal to 180 calendar days of receiving a written request.	The Transmission Planner failed to provide the instructions and data to the Generator Owner within 180 calendar days of receiving a written request.
R2	<p>The Generator Owner provided its verified model(s), including documentation and data to its Transmission Planner after the timeframe specified in MOD-026 Attachment 1 but less than or equal to 90 calendar days late;</p> <p>OR</p> <p>The Generator Owner provided the Transmission Planner verified models that omitted one of the six Parts identified in Requirement R2, Parts 2.1.1 through 2.1.6.</p>	<p>The Generator Owner provided its verified model(s), including documentation and data to its Transmission Planner more than 90 calendar days but less than or equal to 180 calendar days late as specified by the periodicity timeframe in MOD-026 Attachment 1.</p> <p>OR</p> <p>The Generator Owner provided the Transmission Planner verified models that omitted two of the six Parts identified in Requirement R2, Parts 2.1.1 through 2.1.6.</p>	<p>The Generator Owner provided its verified model(s), including documentation and data to its Transmission Planner more than 180 calendar days but less than or equal to 270 calendar days late as specified by the periodicity timeframe in MOD-026 Attachment 1.</p> <p>OR</p> <p>The Generator Owner provided the Transmission Planner verified models that omitted three of the six Parts identified in Requirement R2, Parts 2.1.1 through 2.1.6.</p>	<p>The Generator Owner provided its verified model(s), including documentation and data more than 270 calendar days late to its Transmission Planner in accordance with the periodicity specified in MOD-026 Attachment 1.</p> <p>OR</p> <p>The Generator Owner failed to use model(s) acceptable to the Transmission Planner as specified in Requirement R2, Part 2.1.</p> <p>OR</p> <p>The Generator Owner provided the Transmission Planner verified model(s) but omitted four or more of the six parts identified in Requirement R2, Subparts 2.1.1 through 2.1.6.</p>

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R3	The Generator Owner provided a written response more than 90 calendar days but less than or equal to 120 calendar days of receiving written notice.	The Generator Owner provided a written response more than 120 calendar days but less than or equal to 150 calendar days of receiving written notice.	The Generator Owner provided a written response more than 150 calendar days but less than or equal to 180 calendar days of receiving written notice.	The Generator Owner failed to provide a written response within 180 calendar days of receiving written notice. OR The Generator Owner's written response failed to contain either the technical basis for maintaining the current model, or a list of future model changes, or a plan to perform another model verification.
R4	The Generator Owner provided revised model data or plans to perform model verification more than 180 calendar days but less than or equal to 210 calendar days of making changes to the excitation control system or plant volt/var control function that altered the equipment response characteristic.	The Generator Owner provided revised model data or plans to perform model verification more than 210 calendar days but less than or equal to 240 calendar days of making changes to the excitation control system or plant volt/var control function that altered the equipment response characteristic.	The Generator Owner provided revised model data or plans to perform model verification more than 240 calendar days but less than or equal to 270 calendar days of making changes to the excitation control system or plant volt/var control function that altered the equipment response characteristic.	The Generator Owner failed to provide revised model data or failed to provide plans to perform model verification within 270 calendar days of making changes to the excitation control system or plant volt/var control function that altered the equipment response characteristic.
R5	The Generator Owner provided a written response more than 90 calendar days but less than or equal to 120 calendar days to the Transmission Planner following receipt of a technically justified request to perform a model review of an applicable unit.	The Generator Owner provided a written response more than 120 calendar days but less than or equal to 150 calendar days to the Transmission Planner following receipt of a technically justified request to perform a model review of an applicable unit.	The Generator Owner provided a written response more than 150 calendar days but less than or equal to 180 calendar days to the Transmission Planner following receipt of a technically justified request to perform a model review of an applicable unit.	The Generator Owner failed to provide a written response to the Transmission Planner within 180 calendar days following receipt of a technically justified request to perform a model review of an applicable unit. OR The Generator Owner's written response failed to include one of the sub bullets of Requirement R5.

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R6	<p>The Transmission Planner provided a written response to the Generator Owner indicating whether the model is usable or not usable; including a technical description if the model is not usable, more than 90 calendar days but less than or equal to 120 calendar days of receiving verified model information.</p>	<p>The Transmission Planner provided a written response to the Generator Owner indicating whether the model is usable or not usable; including a technical description if the model is not usable, more than 120 calendar days but less than or equal to 150 calendar days of receiving the verified model information.</p> <p>OR</p> <p>The Transmission Planner’s written response omitted confirmation for one of the specified model criteria listed in Requirement R6, Parts 6.1 through 6.3.</p>	<p>The Transmission Planner provided a written response to the Generator Owner indicating whether the model is usable or not usable; including a technical description if the model is not usable, more than 150 calendar days but less than or equal to 180 calendar days of receiving the verified model information.</p> <p>OR</p> <p>The Transmission Planner’s written response omitted confirmation for two of the specified model criteria listed in Requirement R6, Parts 6.1 through 6.3.</p>	<p>The Transmission Planner failed to provide a written response to the Generator Owner within 180 calendar days of receiving the verified model information.</p> <p>OR</p> <p>The Transmission Planner’s written response omitted confirmation for all specified model criteria listed in Requirement R6, Parts 6.1 through 6.3.</p>

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

E. Regional Variances

None.

F. Associated Documents

None.

Version History

Version	Date	Action	Change Tracking
1	February 7, 2013	Adopted by NERC Board of Trustees	New
1	March 20, 2014	FERC Order issued approving MOD-026-1. (Order becomes effective for R1, R3, R4, R5, and R6 on 7/1/14. R2 becomes effective on 7/1/18.)	

G. References

The following documents contain technical information beyond the scope of this Standard on excitation control system functionality, modeling, and testing.

1. IEEE 421.1 Definitions for Excitation Systems for Synchronous Machines
2. IEEE 421.2 Guide for Identification, Testing, and Evaluation of the Dynamic Performance of Excitation Control Systems
3. IEEE 421.5 IEEE Recommended Practice for Excitation System Models for Power System Stability Studies
4. K. Clark, R.A. Walling, N.W. Miller, "Solar Photovoltaic (PV) Plant Models in PSLF," IEEE/PES General Meeting, Detroit, MI, July 2011
5. M. Asmine, J. Brochu, J. Fortmann, R. Gagnon, Y. Kazachkov, C.-E. Langlois, C. Larose, E. Muljadi, J. MacDowell, P. Pourbeik, S. A. Seman, and K. Wiens, "Model Validation for Wind Turbine Generator Models", IEEE Transactions on Power System, Volume 26, Issue 3, August 2011
6. A. Ellis, E. Muljadi, J. Sanchez-Gasca, Y. Kazachkov, "Generic Models for Simulation of Wind Power Plants in Bulk System Planning Studies," IEEE PES General Meeting 2011, Detroit, MI, July 24-28
7. N.W. Miller, J. J. Sanchez-Gasca, K. Clark, J.M. MacDowell, "Dynamic Modeling of GE Wind Plants for Stability Simulations," IEEE PES General Meeting 2011, Detroit, MI, July 24-28
8. A. Ellis, Y. Kazachkov, E. Muljadi, P. Pourbeik, J.J. Sanchez-Gasca, Working Group Joint Report – WECC Working Group on Dynamic Performance of Wind Power Generation & IEEE Working Group on Dynamic Performance of Wind Power Generation, "Description and Technical Specifications for Generic WTG Models – A Status Report," Proc. IEEE PES 2011 Power Systems Conference and Exposition (PSCE), March 2011, Phoenix, AZ
9. K. Clark, N.W. Miller, R.A. Walling, "Modeling of GE Solar Photovoltaic (PV) Plants for Grid Studies," version 1.1, April 2010
10. K. Clark, N.W. Miller, J. J. Sanchez-Gasca, "Modeling of GE Wind Turbine-Generators for Grid Studies," version 4.5, April 16, 2010, Available from GE Energy
11. R.J. Piwko, N.W. Miller, J.M. MacDowell, "Field Testing & Model Validation of Wind Plants," in Proc. IEEE PES General Meeting, Pittsburg, PA, July 2008
12. N. Miller, K. Clark, J. MacDowell and W. Barton, "Experience with Field and Factory Testing for Model Validation of GE Wind Plants," in Proc. Eur. Wind Energy Conf. Exhib., Brussels, Belgium, March/April 2008

13. IEEE Task Force on Generator Model Validation Testing of the Power System Stability Subcommittee, “Guidelines for Generator Stability Model Validation Testing,” IEEE PES General Meeting 2007, paper 07GM1307
14. W.W. Price and J. J. Sanchez-Gasca, “Simplified Wind Turbine Generator Aerodynamic Models for Transient Stability Studies,” in PROC IEEE PES 2006 Power Systems Conf. Expo. (PSCE), Atlanta, GA, October 1, 2006, p. 986-992
15. J.J. Sanchez-Gasca, R.J. Piwko, N. W. Miller, W. W. Price, “On the Integration of Wind Power Plants in Large Power Systems,” Proc. X Symposium of Specialists in Electric and Expansion Planning (SEPOPE), Florianopolis, Brazil, May 2006
16. N. W. Miller, J. J. Sanchez-Gasca, W. W. Price, R. W. Delmerico, “Dynamic Modeling of GE 1.5 and 3.6 MW Wind Turbine-Generators for Stability Simulations,” Proc. IEEE Power Engineering Society General Meeting, Toronto, Ontario, July 2003
17. P. Pourbeik, C. Pink and R. Bisbee, “Power Plant Model Validation for Achieving Reliability Standard Requirements Based on Recorded On-Line Disturbance Data”, Proceedings of the IEEE PSCE, March, 2011

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

MOD-026 Attachment 1		
Excitation Control System or Plant Volt/Var Function Model Verification Periodicity		
Row Number	Verification Condition	Required Action
1	Establishing the initial verification date for an applicable unit. (Requirement R2)	Transmit the verified model, documentation and data to the Transmission Planner on or before the Effective Date. Row 4 applies when calculating generation fleet compliance during the 10-year implementation period. See Section A5 for Effective Dates.
2	Subsequent verification for an applicable unit. (Requirement R2)	Transmit the verified model, documentation and data to the Transmission Planner on or before the 10-year anniversary of the last transmittal (per Note 1).
3	Initial verification for a new applicable unit or for an existing applicable unit with new excitation control system or plant volt/var control function equipment installed. (Requirement R2)	Transmit the verified model, documentation and data to the Transmission Planner within 365 calendar days after the commissioning date.

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

MOD-026 Attachment 1 Excitation Control System or Plant Volt/Var Function Model Verification Periodicity		
Row Number	Verification Condition	Required Action
4	Existing applicable unit that is equivalent to another unit(s) at the same physical location. AND Each applicable unit has the same MVA nameplate rating. AND The nameplate rating is ≤ 350 MVA. AND Each applicable unit has the same components and settings. AND The model for one of these equivalent applicable units has been verified. (Requirement R2)	Document circumstance with a written statement and include with the verified model, documentation and data provided to the Transmission Planner for the verified equivalent unit. Verify a different equivalent unit during each 10-year verification period. Applies to Row 1 when calculating generation fleet compliance during the 10-year implementation period.
5	The Generator Owner has submitted a verification plan. (Requirement R3, R4 or R5)	Transmit the verified model, documentation and data to the Transmission Planner within 365 calendar days after the submittal of the verification plan.

Standard MOD-026-1 — Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions

MOD-026 Attachment 1		
Excitation Control System or Plant Volt/Var Function Model Verification Periodicity		
Row Number	Verification Condition	Required Action
6	<p>New or existing applicable unit does not include an active closed loop voltage or reactive power control function.</p> <p>(Requirement R2)</p>	<p>Requirement 2 is met with a written statement to that effect transmitted to the Transmission Planner.</p> <p>Perform verification per the periodicity specified in Row 3 for a “New Generating Unit” (or new equipment) only if active closed loop function is established.</p> <p>See Footnote 1 (see Section A.3) for clarification of what constitutes an active closed loop function for both conventional synchronous machines (reference Footnote 1a) and aggregate generating plants (reference Footnote 1b).</p>
7	<p>Existing applicable unit has a current average net capacity factor over the most recent three calendar years, beginning on January 1 and ending on December 31 of 5% or less.</p> <p>(Requirement R2)</p>	<p>Requirement 2 is met with a written statement to that effect transmitted to the Transmission Planner.</p> <p>At the end of this 10-year timeframe, the current average three year net capacity factor (for years 8, 9, and 10) can be examined to determine if the capacity factor exemption can be declared for the next 10-year period. If not eligible for the capacity factor exemption, then model verification must be completed within 365 calendar days of the date the capacity factor exemption expired.</p> <p>For the definition of net capacity factor, refer to Appendix F of the GADS Data Reporting Instructions on the NERC website.</p>

MOD-026 Attachment 1 Excitation Control System or Plant Volt/Var Function Model Verification Periodicity		
Row Number	Verification Condition	Required Action
<p>NOTES:</p> <p>NOTE 1: Establishing the recurring 10-year unit verification period start date: The start date is the actual date of submittal of a verified model to the Transmission Planner for the most recently performed unit verification.</p> <p>NOTE 2: Consideration for early compliance: Existing generator excitation control system or plant volt/var control function model verification is sufficient for demonstrating compliance for a 10-year period from the actual transmittal date if either of the following applies:</p> <ul style="list-style-type: none"> • The Generator Owner has a verified model that is compliant with the applicable regional policies, guidelines or criteria existing at the time of model verification. • The Generator Owner has an existing verified model that is compliant with the requirements of this standard. 		

A. Introduction

1. **Title:** Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions
2. **Number:** MOD-027-1
3. **Purpose:** To verify that the turbine/governor and load control or active power/frequency control¹ model and the model parameters, used in dynamic simulations that assess Bulk Electric System (BES) reliability, accurately represent generator unit real power response to system frequency variations.

4. Applicability:

4.1. Functional entities

- 4.1.1 Generator Owner
- 4.1.2 Transmission Planner

4.2. Facilities

For the purpose of the requirements contained herein, Facilities that are directly connected to the Bulk Electric System (BES) will be collectively referred to as an “applicable unit” that meet the following:

- 4.2.1 Generation in the Eastern or Quebec Interconnections with the following characteristics:
 - 4.2.1.1 Individual generating unit greater than 100 MVA (gross nameplate rating).
 - 4.2.1.2 Individual generating plant consisting of multiple generating units that are directly connected at a common BES bus with total generation greater than 100 MVA (gross aggregate nameplate rating).
- 4.2.2 Generation in the Western Interconnection with the following characteristics:
 - 4.2.2.1 Individual generating unit greater than 75 MVA (gross nameplate rating).
 - 4.2.2.2 Individual generating plant consisting of multiple generating units that are directly connected at a common BES bus with total generation greater than 75 MVA (gross aggregate nameplate rating).
- 4.2.3 Generation in the ERCOT Interconnection with the following characteristics:

¹ Turbine/governor and load control or active power/frequency control:

- a. Turbine/governor and load control applies to conventional synchronous generation.
- b. Active power/frequency control applies to inverter connected generators (often found at variable energy plants).

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

4.2.3.1 Individual generating unit greater than 50 MVA (gross nameplate rating).

4.2.3.2 Individual generating plant consisting of multiple generating units that are directly connected at a common BES bus with total generation greater than 75 MVA (gross aggregate nameplate rating).

5. Effective Date:

- 5.1.** For Requirements R1, and R3 through R5, the first day of the first calendar quarter beyond the date that this standard is approved by applicable regulatory authorities or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities. In those jurisdictions where regulatory approval is not required, the standard shall become effective on the first day of the first calendar quarter beyond the date this standard is approved by the NERC Board of Trustees, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities.
- 5.2.** For Requirement R2, 30 percent of the entity's applicable unit gross MVA for each Interconnection on the first day of the first calendar quarter that is four years following applicable regulatory approval or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, or in those jurisdictions where no regulatory approval is required, on the first day of the first calendar quarter that is four years following NERC Board of Trustees adoption or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities.
- 5.3.** For Requirement R2, 50 percent of the entity's applicable unit gross MVA for each Interconnection on first day of the first calendar quarter that is six years following applicable regulatory approval or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, or in those jurisdictions where no regulatory approval is required, on the first day of the first calendar quarter that is six years following NERC Board of Trustees adoption or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities.
- 5.4.** For Requirement R2, 100 percent of the entity's applicable unit gross MVA for each Interconnection on the first day of the first calendar quarter that is 10 years following applicable regulatory approval or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, or in those jurisdictions where no regulatory approval is required, on the first day of the first calendar quarter that is 10 years following NERC Board of Trustees adoption or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities.

B. Requirements

- R1.** Each Transmission Planner shall provide the following requested information to the Generator Owner within 90 calendar days of receiving a written request: [*Violation Risk Factor: Lower*] [*Time Horizon: Operations Planning*]
- Instructions on how to obtain the list of turbine/governor and load control or active power/frequency control system models that are acceptable to the Transmission Planner for use in dynamic simulation,
 - Instructions on how to obtain the dynamic turbine/governor and load control or active power/frequency control function model library block diagrams and/or data sheets for models that are acceptable to the Transmission Planner, or
 - Model data for any of the Generator Owner's existing applicable unit specific turbine/governor and load control or active power/frequency control system contained in the Transmission Planner's dynamic database from the current (in-use) models.
- R2.** Each Generator Owner shall provide, for each applicable unit, a verified turbine/governor and load control or active power/frequency control model, including documentation and data (as specified in Part 2.1) to its Transmission Planner in accordance with the periodicity specified in MOD-027 Attachment 1. [*Violation Risk Factor: Medium*] [*Time Horizon: Long-term Planning*]
- 2.1.** Each applicable unit's model shall be verified by the Generator Owner using one or more models acceptable to the Transmission Planner. Verification for individual units rated less than 20 MVA (gross nameplate rating) in a generating plant (per Section 4.2.1.2, 4.2.2.2, or 4.2.3.2) may be performed using either individual unit or aggregate unit model(s) or both. Each verification shall include the following:
- 2.1.1.** Documentation comparing the applicable unit's MW model response to the recorded MW response for either:
- A frequency excursion from a system disturbance that meets MOD-027 Attachment 1 Note 1 with the applicable unit on-line,
 - A speed governor reference change with the applicable unit on-line, or
 - A partial load rejection test,²
- 2.1.2.** Type of governor and load control or active power control/frequency control³ equipment,

² Differences between the control mode tested and the final simulation model must be identified, particularly when analyzing load rejection data. Most controls change gains or have a set point runback which takes effect when the breaker opens. Load or set point controls will also not be in effect once the breaker opens. Some method of accounting for these differences must be presented if the final model is not validated from on-line data under the normal operating conditions under which the model is expected to apply.

³ Turbine/governor and load control or active power/frequency control:

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

- 2.1.3. A description of the turbine (e.g. for hydro turbine - Kaplan, Francis, or Pelton; for steam turbine - boiler type, normal fuel type, and turbine type; for gas turbine - the type and manufacturer; for variable energy plant - type and manufacturer),
 - 2.1.4. Model structure and data for turbine/governor and load control or active power/frequency control, and
 - 2.1.5. Representation of the real power response effects of outer loop controls (such as operator set point controls, and load control but excluding AGC control) that would override the governor response (including blocked or nonfunctioning governors or modes of operation that limit Frequency Response), if applicable.
- R3.** Each Generator Owner shall provide a written response to its Transmission Planner within 90 calendar days of receiving one of the following items for an applicable unit.
- Written notification, from its Transmission Planner (in accordance with Requirement R5) that the turbine/governor and load control or active power/frequency control model is not “usable,”
 - Written comments from its Transmission Planner identifying technical concerns with the verification documentation related to the turbine/governor and load control or active power/frequency control model, or
 - Written comments and supporting evidence from its Transmission Planner indicating that the simulated turbine/governor and load control or active power/frequency control response did not approximate the recorded response for three or more transmission system events.

The written response shall contain either the technical basis for maintaining the current model, the model changes, or a plan to perform model verification⁴ (in accordance with Requirement R2). [*Violation Risk Factor: Lower*] [*Time Horizon: Operations Planning*]

- R4.** Each Generator Owner shall provide revised model data or plans to perform model verification⁵ (in accordance with Requirement R2) for an applicable unit to its Transmission Planner within 180 calendar days of making changes to the turbine/governor and load control or active power/frequency control system that alter the equipment response characteristic⁶. [*Violation Risk Factor: Lower*] [*Time Horizon: Operations Planning*]

-
- a. Turbine/governor and load control applies to conventional synchronous generation.
 - b. Active power/frequency control applies to inverter connected generators (often found at variable energy plants).

⁴ If verification is performed, the 10 year period as outlined in MOD-027 Attachment 1 is reset.

⁵ Ibid.

⁶ Control replacement or alteration including software alterations or plant digital control system addition or replacement, plant digital control system software alterations that alter droop, and/or dead band, and/or frequency response and/or a change in the frequency control mode (such as going from droop control to constant MW control, etc).

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

- R5.** Each Transmission Planner shall provide a written response to the Generator Owner within 90 calendar days of receiving the turbine/governor and load control or active power/frequency control system verified model information in accordance with Requirement R2 that the model is usable (meets the criteria specified in Parts 5.1 through 5.3) or is not usable.
- 5.1.** The turbine/governor and load control or active power/frequency control function model initializes to compute modeling data without error,
- 5.2.** A no-disturbance simulation results in negligible transients, and
- 5.3.** For an otherwise stable simulation, a disturbance simulation results in the turbine/governor and load control or active power/frequency control model exhibiting positive damping.

If the model is not usable, the Transmission Planner shall provide a technical description of why the model is not usable. [*Violation Risk Factor: Medium*] [*Time Horizon: Operations Planning*]

C. Measures

- M1.** The Transmission Planner must have and provide the dated request for instructions or data, the transmitted instruction or data, and dated evidence of a written transmittal (e.g., electronic mail message, postal receipt, or confirmation of facsimile) as evidence that it provided the request within 90 calendar days in accordance with Requirement R1.
- M2.** The Generator Owner must have and provide dated evidence it verified each generator turbine/governor and load control or active power/frequency control model according to Part 2.1 for each applicable unit and a dated transmittal (e.g., electronic mail message, postal receipt, or confirmation of facsimile) as evidence it provided the model, documentation, and data to its Transmission Planner, in accordance with Requirement R2.
- M3.** Evidence for Requirement R3 must include the Generator Owner's dated written response containing the information identified in Requirement R3 and dated evidence of transmittal (e.g., electronic mail message, postal receipt, or confirmation of facsimile) of the response.
- M4.** Evidence for Requirement R4 must include, for each of the Generator Owner's applicable units for which system changes specified in Requirement R4 were made, dated revised model data or dated plans to perform a model verification and dated evidence of transmittal (e.g., electronic mail message, postal receipt, or confirmation of facsimile) within 180 calendar days of making changes.
- M5.** Evidence of Requirement R5 must include, for each model received, the dated response indicating the model was usable or not usable according to the criteria specified in Parts 5.1 through 5.3 and for a model that is not useable, a technical description is the model is not usable, and dated evidence of transmittal (e.g., electronic mail messages, postal receipts, or confirmation of facsimile) that the Generator Owner was notified within 90 calendar days of receipt of model information in accordance with Requirement R5.

D. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority

The Regional Entity shall serve as the Compliance Enforcement Authority unless the applicable entity is owned, operated, or controlled by the Regional Entity. In such cases the ERO or a Regional entity approved by FERC or other applicable governmental authority shall serve as the CEA.

1.2. Data Retention

The following evidence retention periods identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

The Generator Owner and Transmission Planner shall each keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- The Transmission Planner shall retain the information/data request and provided response evidence of Requirements R1 and R5, Measures M1 and M5 for 3 calendar years from the date the document was provided.
- The Generator Owner shall retain the latest turbine/governor and load control or active power/frequency control system model verification evidence of Requirement R2, Measure M2.
- The Generator Owner shall retain the information/data request and provided response evidence of Requirements R3, and R4 Measures M3 and M4 for 3 calendar years from the date the document was provided.

If a Generator Owner or Transmission Planner is found non-compliant, it shall keep information related to the non-compliance until mitigation is complete and approved or for the time specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Assessment Processes

Compliance Audit
Self-Certification
Spot Checking
Compliance Investigation
Self-Reporting
Complaint

1.4. Additional Compliance Information

None

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

2. Violation Severity Levels

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	The Transmission Planner provided the instructions and data to the Generator Owner more than 90 calendar days but less than or equal to 120 calendar days of receiving a written request.	The Transmission Planner provided the instructions and data to the Generator Owner more than 120 calendar days but less than or equal to 150 calendar days of receiving a written request.	The Transmission Planner provided the instructions and data to the Generator Owner more than 150 calendar days but less than or equal to 180 calendar days of receiving a written request.	The Transmission Planner failed to provide the instructions and data to the Generator Owner within 180 calendar days of receiving a written request.
R2	<p>The Generator Owner provided its verified model(s) to its Transmission Planner after the periodicity timeframe specified in MOD-027 Attachment 1 but less than or equal to 90 calendar days late;</p> <p>OR</p> <p>The Generator Owner provided the Transmission Planner a verified model that omitted one of the five Parts identified in Requirement R2, Subparts 2.1.1, through 2.1.5.</p>	<p>The Generator Owner provided its verified model(s) to its Transmission Planner more than 90 calendar days but less than or equal to 180 calendar days late as specified by the periodicity timeframe in MOD-027 Attachment 1;</p> <p>OR</p> <p>The Generator Owner provided the Transmission Planner a verified model that omitted two of the five Parts identified in Requirement R2, Subparts 2.1.1, through 2.1.5.</p>	<p>The Generator Owner provided its verified model(s) to its Transmission Planner more than 180 calendar days but less than or equal to 270 calendar days late as specified by the periodicity timeframe in MOD-027 Attachment 1;</p> <p>OR</p> <p>The Generator Owner provided the Transmission Planner verified models that omitted three of the five Parts identified in Requirement R2, Subparts 2.1.1, through 2.1.5.</p>	<p>The Generator Owner provided its verified model(s) more than 270 calendar days late to its Transmission Planner in accordance with the periodicity specified in MOD-027 Attachment 1;</p> <p>OR</p> <p>The Generator Owner failed to use model(s) acceptable to the Transmission Planner as specified in Requirement R2, Part 2.1;</p> <p>OR</p> <p>The Generator Owner provided the Transmission Planner verified model(s) that omitted four or more of the five Parts identified in Requirement R2, Subparts 2.1.1, through 2.1.5.</p>

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R3	The Generator Owner provided a written response more than 90 calendar days but less than or equal to 120 calendar days of receiving written notice.	The Generator Owner provided a written response more than 120 calendar days but less than or equal to 150 calendar days of receiving written notice.	The Generator Owner provided a written response more than 150 calendar days but less than or equal to 180 calendar days of receiving written notice.	The Generator Owner failed to provide a written response within 180 calendar days of receiving written notice; OR The Generator Owner's written response failed to contain either the technical basis for maintaining the current model, or a list of future model changes, or a plan to perform another model verification.
R4	The Generator Owner provided revised model data or plans to perform model verification more than 180 calendar days but less than or equal to 210 calendar days of making changes to the turbine/governor and load control or active power/frequency control system that alter the equipment response characteristic.	The Generator Owner provided revised model data or plans to perform model verification more than 210 calendar days but less than or equal to 240 calendar days of making changes to the turbine/governor and load control or active power/frequency control system that alter the equipment response characteristic.	The Generator Owner provided revised model data or plans to perform model verification more than 240 calendar days but less than or equal to 270 calendar days of making changes to the turbine/governor and load control or active power/frequency control system that alter the equipment response characteristic.	The Generator Owner failed to provide revised model data or failed to provide plans to perform model verification within 270 calendar days of making changes to the turbine/governor and load control or active power/frequency control system that altered the equipment response characteristic.

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R5	<p>The Transmission Planner provided a written response to the Generator Owner indicating whether the model is usable or not usable, including a technical description if the model is not usable, more than 90 calendar days but less than or equal to 120 calendar days of receiving verified model information;</p>	<p>The Transmission Planner provided a written response to the Generator Owner indicating whether the model is usable or not usable, including a technical description if the model is not usable, more than 120 calendar days but less than or equal to 150 calendar days of receiving the verified model information;</p> <p>OR</p> <p>The Transmission Planner’s written response omitted confirmation for one of the specified model criteria listed in Requirement R5, Parts 5.1 through 5.3.</p>	<p>The Transmission Planner provided a written response to the Generator Owner indicating whether the model is usable or not usable, including a technical description if the model is not usable, more than 150 calendar days but less than or equal to 180 calendar days of receiving the verified model information;</p> <p>OR</p> <p>The Transmission Planner’s written response omitted confirmation for two of the specified model criteria listed in Requirement R5, Parts 5.1 through 5.3.</p>	<p>The Transmission Planner failed to provide a written response to the Generator Owner within 180 calendar days of receiving the verified model information;</p> <p>OR</p> <p>The Transmission Planner provided a written response without including confirmation of all specified model criteria listed in Requirement R5, Parts 5.1 through 5.3.</p>

E. Regional Variances

None.

F. Associated Documents

None.

Version History

Version	Date	Action	Change Tracking
1	February 7, 2013	Adopted by NERC Board of Trustees	New
1	March 20, 2014	FERC Order issued approving MOD-027-1. (Order becomes effective for R1, R3, R4, and R5 on 7/1/14. R2 becomes effective 7/1/18.)	

G. References

The following documents contain technical information beyond the scope of this Standard on turbine/governor and load control or active power/frequency control system functionality, modeling, and testing.

- 1) IEEE Task Force on Generator Model Validation Testing of the Power System Stability Subcommittee, "Guidelines for Generator Stability Model Validation Testing," IEEE PES General Meeting 2007, paper 07GM1307
- 2) L. Pereira "New Thermal Governor Model Development: Its Impact on Operation and Planning Studies on the Western Interconnection" IEEE POWER AND ENERGY MAGAZINE, MAY/JUNE 2005
- 3) D.M. Cabbell, S. Rueckert, B.A. Tuck, and M.C. Willis, "The New Thermal Governor Model Used in Operating and Planning Studies in WECC," in Proc. IEEE PES General Meeting, Denver, CO, 2004
- 4) S. Patterson, "Importance of Hydro Generation Response Resulting from the New Thermal Modeling-and Required Hydro Modeling Improvements," in Proc. IEEE PES General Meeting, Denver, CO, 2004
- 5) L. Pereira, D. Kosterev, D. Davies, and S. Patterson, "New Thermal Governor Model Selection and Validation in the WECC," IEEE Trans. Power Syst., vol. 19, no. 1, pp. 517-523, February 2004
- 6) L. Pereira, J. Undrill, D. Kosterev, D. Davies, and S. Patterson, "A New Thermal Governor Modeling Approach in the WECC," IEEE Trans. Power Syst., vol. 18, no. 2, pp. 819-829, May 2003

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

- 7) P. Pourbeik, C. Pink and R. Bisbee, “Power Plant Model Validation for Achieving Reliability Standard Requirements Based on Recorded On-Line Disturbance Data”, Proceedings of the IEEE PSCE, March, 2011

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

MOD-027 Attachment 1		
Turbine/Governor and Load Control or Active Power/Frequency Control Model Periodicity		
Row Number	Verification Condition	Required Action
1	Establishing the initial verification date for an applicable unit. (Requirement R2)	Transmit the verified model, documentation and data to the Transmission Planner on or before the Effective Date. Row 5 applies when calculating generation fleet compliance during the 10year implementation period. See Section A5 for Effective Dates.
2	Subsequent verification for an applicable unit. (Requirement R2)	Transmit the verified model, documentation and data to the Transmission Planner on or before the 10-year anniversary of the last transmittal (per Note 2).
3	Applicable unit is not subjected to a frequency excursion per Note 1 by the date otherwise required to meet the dates per Rows 1, 2, 4, or 6. (This row is only applicable if a frequency excursion from a systemdisturbance that meets Note 1 is selected for the verification method and the ability to record the applicable unit’s real power response to a frequency excursion is installed and expected to be available). (Requirement R2)	Requirement 2 is met with a written statement to that effect transmitted to the Transmission Planner. Transmit the verified model, documentation and data to the Transmission Planner on or before 365 calendar days after a frequency excursion per Note 1 occurs and the recording equipment captures the applicable unit’s real power response as expected.
4	Initial verification for a new applicable unit or for an existing applicable unit with new turbine/governor and load control or active power/frequency control equipment installed. (Requirement R2)	Transmit the verified model, documentation and data to the Transmission Planner within 365 calendar days after the commissioning date.

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

MOD-027 Attachment 1		
Turbine/Governor and Load Control or Active Power/Frequency Control Model Periodicity		
Row Number	Verification Condition	Required Action
5	<p>Existing applicable unit that is equivalent to another applicable unit(s) at the same physical location;</p> <p>AND</p> <p>Each applicable unit has the same MVA nameplate rating;</p> <p>AND</p> <p>The nameplate rating is ≤ 350 MVA;</p> <p>AND</p> <p>Each applicable unit has the same components and settings;</p> <p>AND</p> <p>The model for one of these equivalent applicable units has been verified.</p> <p>(Requirement R2)</p>	<p>Document circumstance with a written statement and include with the verified model, documentation and data provided to the Transmission Planner for the verified equivalent unit.</p> <p>Verify a different equivalent unit during each 10-year verification period.</p> <p>Applies to Row 1 when calculating generation fleet compliance during the 10-year implementation period.</p>
6	<p>The Generator Owner has submitted a verification plan.</p> <p>(Requirement R3 or R4)</p>	<p>Transmit the verified model, documentation and data to the Transmission Planner within 365 calendar days after the submittal of the verification plan.</p>

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

MOD-027 Attachment 1		
Turbine/Governor and Load Control or Active Power/Frequency Control Model Periodicity		
Row Number	Verification Condition	Required Action
7	<p>Applicable unit is not responsive to both over and under frequency excursion events (The applicable unit does not operate in a frequency control mode, except during normal start up and shut down, that would result in a turbine/governor and load control or active power/frequency control mode response.);</p> <p>OR</p> <p>Applicable unit either does not have an installed frequency control system or has a disabled frequency control system.</p> <p>(Requirement R2)</p>	<p>Requirement 2 is met with a written statement to that effect transmitted to the Transmission Planner.</p> <p>Perform verification per the periodicity specified in Row 4 for a “New Generating Unit” (or new equipment) only if responsive control mode operation for connected operations is established.</p>
8	<p>Existing applicable unit has a current average net capacity factor over the most recent three calendar years, beginning on January 1 and ending on December 31 of 5% or less.</p> <p>(Requirement R2)</p>	<p>Requirement 2 is met with a written statement to that effect transmitted to the Transmission Planner.</p> <p>At the end of this 10 calendar year timeframe, the current average three year net capacity factor (for years 8, 9, and 10) can be examined to determine if the capacity factor exemption can be declared for the next 10 calendar year period. If not eligible for the capacity factor exemption, then model verification must be completed within 365 calendar days of the date the capacity factor exemption expired.</p> <p>For the definition of net capacity factor, refer to Appendix F of the GADS Data Reporting Instructions on the NERC website.</p>

Standard MOD-027-1 — Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions

MOD-027 Attachment 1		
Turbine/Governor and Load Control or Active Power/Frequency Control Model Periodicity		
Row Number	Verification Condition	Required Action
<p>NOTES:</p> <p>NOTE 1: Unit model verification frequency excursion criteria:</p> <ul style="list-style-type: none"> • ≥ 0.05 hertz deviation (nadir point) from scheduled frequency for the Eastern Interconnection with the applicable unit operating in a frequency responsive mode • ≥ 0.10 hertz deviation (nadir point) from scheduled frequency for the ERCOT and Western Interconnections with the applicable unit operating in a frequency responsive mode • ≥ 0.15 hertz deviation (nadir point) from scheduled frequency for the Quebec Interconnection with the applicable unit operating in a frequency responsive mode <p>NOTE 2: Establishing the recurring ten year unit verification period start date:</p> <ul style="list-style-type: none"> • The start date is the actual date of submittal of a verified model to the Transmission Planner for the most recently performed unit verification. <p>NOTE 3: Consideration for early compliance:</p> <p>Existing turbine/governor and load control or active power/frequency control model verification is sufficient for demonstrating compliance for a 10 year period from the actual transmittal date if either of the following applies:</p> <ul style="list-style-type: none"> • The Generator Owner has a verified model that is compliant with the applicable regional policies, guidelines or criteria existing at the time of model verification • The Generator Owner has an existing verified model that is compliant with the requirements of this standard 		

A. Introduction

1. **Title:** Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection
2. **Number:** PRC-019-1
3. **Purpose:** To verify coordination of generating unit Facility or synchronous condenser voltage regulating controls, limit functions, equipment capabilities and Protection System settings.

4. **Applicability:**

4.1. Functional Entities

4.1.1 Generator Owner

4.1.2 Transmission Owner that owns synchronous condenser(s)

4.2. Facilities

For the purpose of this standard, the term, “applicable Facility” shall mean any one of the following:

4.2.1 Individual generating unit greater than 20 MVA (gross nameplate rating) directly connected to the Bulk Electric System.

4.2.2 Individual synchronous condenser greater than 20 MVA (gross nameplate rating) directly connected to the Bulk Electric System.

4.2.3 Generating plant/ Facility consisting of one or more units that are connected to the Bulk Electric System at a common bus with total generation greater than 75 MVA (gross aggregate nameplate rating).

4.2.4 Any generator, regardless of size, that is a blackstart unit material to and designated as part of a Transmission Operator’s restoration plan.

5. **Effective Date:**

5.1. In those jurisdictions where regulatory approval is required:

5.1.1 By the first day of the first calendar quarter, two calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified at least 40 percent of its applicable Facilities.

5.1.2 By the first day of the first calendar quarter, three calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified at least 60 percent of its applicable Facilities.

5.1.3 By the first day of the first calendar quarter, four calendar years following applicable regulatory, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, approval each

Standard PRC-019-1 — Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection

Generator Owner and Transmission Owner shall have verified at least 80 percent of its applicable Facilities.

5.1.4 By the first day of the first calendar quarter, five calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified 100 percent of its applicable Facilities.

5.2. In those jurisdictions where regulatory approval is not required:

5.2.1 By the first day of the first calendar quarter, two calendar years following Board of Trustees approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified at least 40 percent of its applicable Facilities.

5.2.2 By the first day of the first calendar quarter, three calendar years following Board of Trustees approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified at least 60 percent of its applicable Facilities.

5.2.3 By the first day of the first calendar quarter, four calendar years following Board of Trustees approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified at least 80 percent of its applicable Facilities.

5.2.4 By the first day of the first calendar quarter, five calendar years following Board of Trustees approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner and Transmission Owner shall have verified 100 percent of its applicable Facilities.

B. Requirements

R1. At a maximum of every five calendar years, each Generator Owner and Transmission Owner with applicable Facilities shall coordinate the voltage regulating system controls, (including in-service¹ limiters and protection functions) with the applicable equipment capabilities and settings of the applicable Protection System devices and functions. [*Violation Risk Factor: Medium*] [*Time Horizon: Long-term Planning*]

1.1. Assuming the normal automatic voltage regulator control loop and steady-state system operating conditions, verify the following coordination items for each applicable Facility:

¹ Limiters or protection functions that are installed and activated on the generator or synchronous condenser.

Standard PRC-019-1 — Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection

- 1.1.1. The in-service limiters are set to operate before the Protection System of the applicable Facility in order to avoid disconnecting the generator unnecessarily.
 - 1.1.2. The applicable in-service Protection System devices are set to operate to isolate or de-energize equipment in order to limit the extent of damage when operating conditions exceed equipment capabilities or stability limits.
 - R2. Within 90 calendar days following the identification or implementation of systems, equipment or setting changes that will affect the coordination described in Requirement R1, each Generator Owner and Transmission Owner with applicable Facilities shall perform the coordination as described in Requirement R1. These possible systems, equipment or settings changes include, but are not limited to the following [*Violation Risk Factor: Medium*] [*Time Horizon: Long-term Planning*]:
 - Voltage regulating settings or equipment changes;
 - Protection System settings or component changes;
 - Generating or synchronous condenser equipment capability changes; or
 - Generator or synchronous condenser step-up transformer changes.

C. Measures

- M1. Each Generator Owner and Transmission Owner with applicable Facilities will have evidence (such as examples provided in PRC-019 Section G) that it coordinated the voltage regulating system controls, including in-service² limiters and protection functions, with the applicable equipment capabilities and settings of the applicable Protection System devices and functions as specified in Requirement R1. This evidence should include dated documentation that demonstrates the coordination was performed.
- M2. Each Generator Owner and Transmission Owner with applicable Facilities will have evidence of the coordination required by the events listed in Requirement R2. This evidence should include dated documentation that demonstrates the specified intervals in Requirement R2 have been met.

D. Compliance

1. **Compliance Monitoring Process**
 - 1.1. **Compliance Enforcement Authority**

The Regional Entity shall serve as the Compliance enforcement authority unless the applicable entity is owned, operated, or controlled by the Regional Entity. In such cases the ERO or a Regional entity approved by FERC or other applicable governmental authority shall serve as the CEA.

² Limiters or protection functions that are installed and activated on the generator or synchronous condenser.

Standard PRC-019-1 — Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection

1.2. Evidence Retention

The following evidence retention periods identify a period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention specified below is shorter than the time since the last compliance audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

The Generator Owner and Transmission Owner shall retain evidence of compliance with Requirements R1 and R2, Measures M1 and M2 for six years.

If a Generator Owner or Transmission Owner is found non-compliant, the entity shall keep information related to the non-compliance until mitigation is complete and approved or for the time period specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last periodic audit report and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Assessment Processes

- Compliance Audit
- Self-Certification
- Spot Checking
- Compliance Investigation
- Self-Reporting
- Complaint

1.4. Additional Compliance Information

None

2. Violation Severity Levels

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	The Generator Owner or Transmission Owner coordinated equipment capabilities, limiters, and protection specified in Requirement R1 more than 5 calendar	The Generator Owner or Transmission Owner coordinated equipment capabilities, limiters, and protection specified in Requirement R1 more than 5 calendar	The Generator Owner or Transmission Owner coordinated equipment capabilities, limiters, and protection specified in Requirement R1 more than 5 calendar	The Generator Owner or Transmission Owner failed to coordinate equipment capabilities, limiters, and protection specified in Requirement R1 within 5 calendar

Standard PRC-019-1 — Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection

	years but less than or equal to 5 calendar years plus 4 months after the previous coordination.	years plus 4 months but less than or equal to 5 calendar years plus 8 months after the previous coordination.	years plus 8 months but less than or equal to 5 calendar years plus 12 months after the previous coordination.	years plus 12 months after the previous coordination.
R2	The Generator Owner or Transmission Owner coordinated equipment capabilities, limiters, and protection specified in Requirement R1 more than 90 calendar days but less than or equal to 100 calendar days following the identification or implementation of a change in equipment or settings that affected the coordination.	The Generator Owner or Transmission Owner coordinated equipment capabilities, limiters, and protection specified in Requirement R1 more than 100 calendar days but less than or equal to 110 calendar days following the identification or implementation of a change in equipment or settings that affected the coordination.	The Generator Owner or Transmission Owner coordinated equipment capabilities, limiters, and protection specified in Requirement R1 more than 110 calendar days but less than or equal to 120 calendar days following the identification or implementation of a change in equipment or settings that affected the coordination.	The Generator Owner or Transmission Owner failed to coordinate equipment capabilities, limiters, and protection specified in Requirement R1 within 120 calendar days following the identification or implementation of a change in equipment or settings that affected the coordination.

E. Regional Variances

None.

F. Associated Documents

“Underexcited Operation of Turbo Generators”, AIEE Proceedings T Section 881, Volume 67, 1948, Appendix 1, C. G. Adams and J. B. McClure.

,”Protective Relaying For Power Generation Systems”, Boca Raton, FL, Taylor & Francis, 2006, Reimert, Donald

“Coordination of Generator Protection with Generator Excitation Control and Generator Capability”, a report of Working Group J5 of the IEEE PSRC Rotating Machinery Subcommittee

“IEEE C37.102-2006 IEEE Guide for AC Generator Protection”

“IEEE C50.13-2005 IEEE Standard for Cylindrical-Rotor 50 Hz and 60 Hz Synchronous Generators Rated 10 MVA and Above”

Version History

Version	Date	Action	Change Tracking
1	February 7, 2013	Adopted by NERC Board of Trustees	New
1	March 20, 2014	FERC Order issued approving PRC-019-1. (Order becomes effective on 7/1/16.)	

G. Reference

Examples of Coordination

The evidence of coordination associated with Requirement R1 may be in the form of:

- P-Q Diagram (Example in Attachment 1), or
- R-X Diagram (Example in Attachment 2), or
- Inverse Time Diagram (Example in Attachment 3) or,
- Equivalent tables or other evidence

This evidence should include the equipment capabilities and the operating region for the limiters and protection functions

Equipment limits, types of limiters and protection functions which could be coordinated include (but are not limited to):

- Field over-excitation limiter and associated protection functions.
- Inverter over current limit and associated protection functions.
- Field under-excitation limiter and associated protection functions.
- Generator or synchronous condenser reactive capabilities.
- Volts per hertz limiter and associated protection functions.
- Stator over-voltage protection system settings.
- Generator and transformer volts per hertz capability.
- Time vs. field current or time vs. stator current.

Standard PRC-019-1 — Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection

NOTE: This listing is for reference only. This standard does not require the installation or activation of any of the above limiter or protection functions.

For this example, the Steady State Stability Limit (SSSL) is the limit to synchronous stability in the under-excited region with fixed field current.

On a P-Q diagram using X_d as the direct axis saturated synchronous reactance of the generator, X_s as the equivalent reactance between the generator terminals and the “infinite bus” including the reactance of the generator step-up transformer and V_g as the generator terminal voltage (all values in per-unit), the SSSL can be calculated as an arc with the center on the Q axis with the magnitude of the center and radius described by the following equations

$$C = V_g^2/2*(1/X_s-1/X_d)$$

$$R = V_g^2/2*(1/X_s+1/X_d)$$


On an R-X diagram using X_d as the direct axis saturated synchronous reactance of the generator, and X_s as the equivalent reactance between the generator terminals and the “infinite bus” including the reactance of the generator step-up transformer the SSSL is an arc with the center on the X axis with the center and radius described by the following equations:

$$C = (X_d-X_s)/2$$

$$R = (X_d+X_s)/2$$


Standard PRC-019-1 — Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection

Section G Attachment 1 – Example of Capabilities, Limiters and Protection on a P-Q Diagram at nominal voltage and frequency

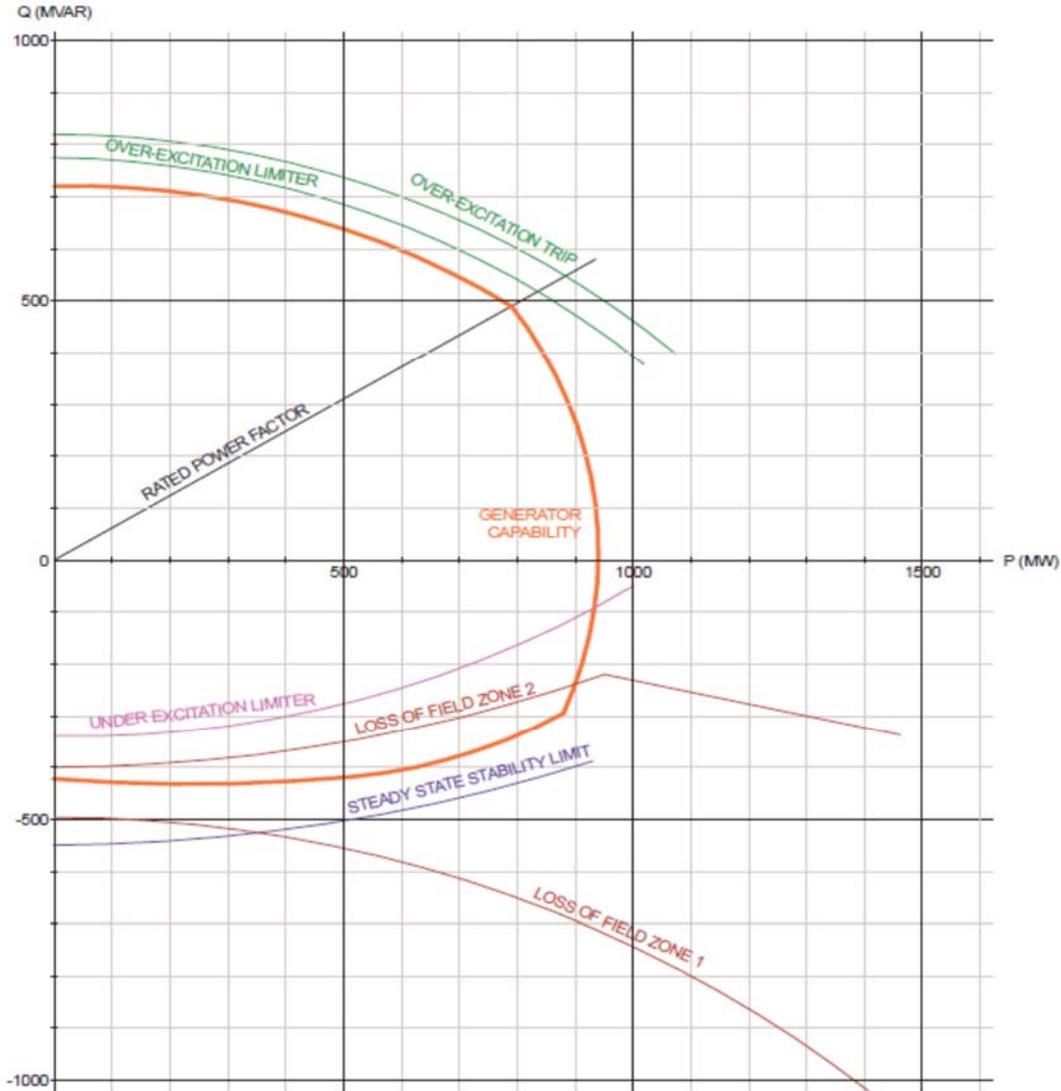


Standard PRC-019-1 — Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection

Section G Attachment 2 – Example of Capabilities, Limiters, and Protection on an R-X Diagram at nominal voltage and frequency

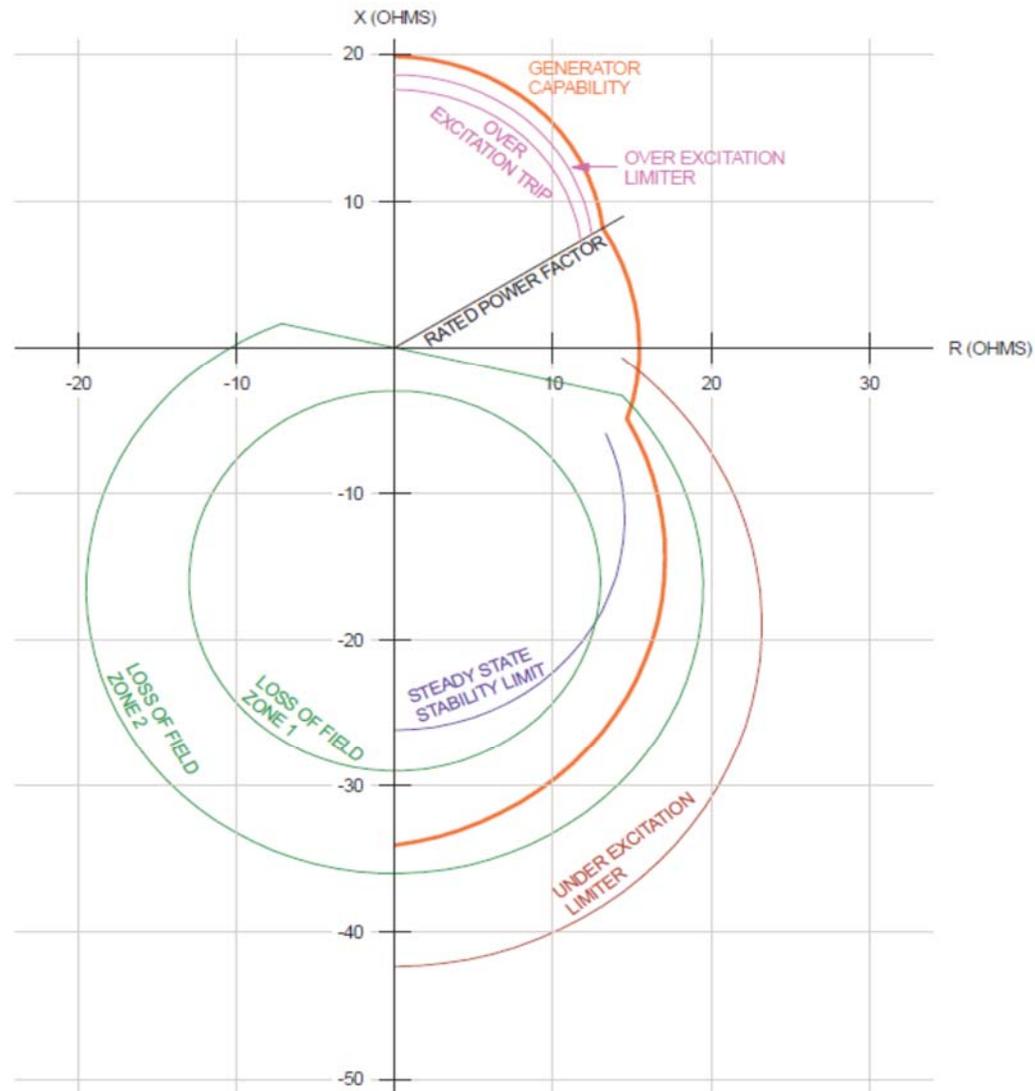

Standard PRC-019-1 — Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection

Section G Attachment 3 - Example of Capabilities, Limiters, and Protection on an Inverse Time Characteristic Plot

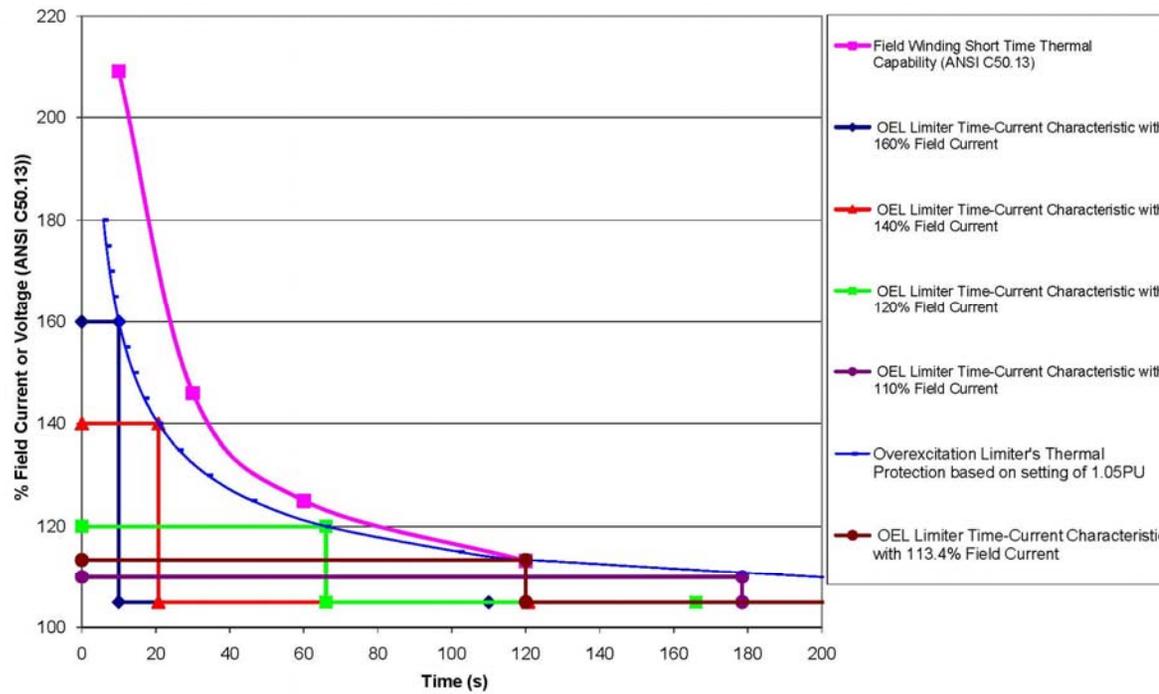

A. Introduction

1. **Title:** Generator Frequency and Voltage Protective Relay Settings
2. **Number:** PRC-024-1
3. **Purpose:** Ensure Generator Owners set their generator protective relays such that generating units remain connected during defined frequency and voltage excursions.
4. **Applicability:**
 - 4.1. Generator Owner
5. **Effective Date:**
 - 5.1. In those jurisdictions where regulatory approval is required:
 - 5.1.1 By the first day of the first calendar quarter, two calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner shall have verified at least 40 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.1.2 By the first day of the first calendar quarter, three calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner shall have verified at least 60 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.1.3 By the first day of the first calendar quarter, four calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner shall have verified at least 80 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.1.4 By the first day of the first calendar quarter, five calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner shall have verified 100 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.2. In those jurisdictions where regulatory approval is not required:
 - 5.2.1 By the first day of the first calendar quarter, two calendar years following Board of Trustees approval, each Generator Owner shall have verified at least 40 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.2.2 By the first day of the first calendar quarter, three calendar years following Board of Trustees approval, each Generator Owner shall have verified at least 60 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.

- 5.2.3** By the first day of the first calendar quarter, four calendar years following Board of Trustees approval, each Generator Owner shall have verified at least 80 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
- 5.2.4** By the first day of the first calendar quarter, five calendar years following Board of Trustees approval, each Generator Owner shall have verified 100 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.

B. Requirements

- R1.** Each Generator Owner that has generator frequency protective relaying¹ activated to trip its applicable generating unit(s) shall set its protective relaying such that the generator frequency protective relaying does not trip the applicable generating unit(s) within the “no trip zone” of PRC-024 Attachment 1, subject to the following exceptions: *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- Generating unit(s) may trip if the protective functions (such as out-of-step functions or loss-of-field functions) operate due to an impending or actual loss of synchronism or, for asynchronous generating units, due to instability in power conversion control equipment.
 - Generating unit(s) may trip if clearing a system fault necessitates disconnecting (a) generating unit(s).
 - Generating unit(s) may trip within a portion of the “no trip zone” of PRC-024 Attachment 1 for documented and communicated regulatory or equipment limitations in accordance with Requirement R3.
- R2.** Each Generator Owner that has generator voltage protective relaying¹ activated to trip its applicable generating unit(s) shall set its protective relaying such that the generator voltage protective relaying does not trip the applicable generating unit(s) as a result of a voltage excursion (at the point of interconnection²) caused by an event on the transmission system external to the generating plant that remains within the “no trip zone” of PRC-024 Attachment 2. If the Transmission Planner allows less stringent voltage relay settings than those required to meet PRC-024 Attachment 2, then the Generator Owner shall set its protective relaying within the voltage recovery characteristics of a location-specific Transmission Planner’s study. Requirement R2 is subject to the following exceptions: *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- Generating unit(s) may trip in accordance with a Special Protection System (SPS) or Remedial Action Scheme (RAS).
 - Generating unit(s) may trip if clearing a system fault necessitates disconnecting (a) generating unit(s).
 - Generating unit(s) may trip by action of protective functions (such as out-of-step functions or loss-of-field functions) that operate due to an impending or actual loss of synchronism or, for asynchronous generating units, due to instability in power conversion control equipment.

¹ Each Generator Owner is not required to have frequency or voltage protective relaying (including but not limited to frequency and voltage protective functions for discrete relays, volts per hertz relays evaluated at nominal frequency, multi-function protective devices or protective functions within control systems that directly trip or provide tripping signals to the generator based on frequency or voltage inputs) installed or activated on its unit.

² For the purposes of this standard, point of interconnection means the transmission (high voltage) side of the generator step-up or collector transformer.

- Generating unit(s) may trip within a portion of the “no trip zone” of PRC-024 Attachment 2 for documented and communicated regulatory or equipment limitations in accordance with Requirement R3.
- R3.** Each Generator Owner shall document each known regulatory or equipment limitation³ that prevents an applicable generating unit with generator frequency or voltage protective relays from meeting the relay setting criteria in Requirements R1 or R2 including (but not limited to) study results, experience from an actual event, or manufacturer’s advice.
[Violation Risk Factor: Lower] [Time Horizon: Long-term Planning]
- 3.1.** The Generator Owner shall communicate the documented regulatory or equipment limitation, or the removal of a previously documented regulatory or equipment limitation, to its Planning Coordinator and Transmission Planner within 30 calendar days of any of the following:
- Identification of a regulatory or equipment limitation.
 - Repair of the equipment causing the limitation that removes the limitation.
 - Replacement of the equipment causing the limitation with equipment that removes the limitation.
 - Creation or adjustment of an equipment limitation caused by consumption of the cumulative turbine life-time frequency excursion allowance.
- R4.** Each Generator Owner shall provide its applicable generator protection trip settings associated with Requirements R1 and R2 to the Planning Coordinator or Transmission Planner that models the associated unit within 60 calendar days of receipt of a written request for the data and within 60 calendar days of any change to those previously requested trip settings unless directed by the requesting Planning Coordinator or Transmission Planner that the reporting of relay setting changes is not required.
[Violation Risk Factor: Lower] [Time Horizon: Operations Planning]

C. Measures

- M1.** Each Generator Owner shall have evidence that generator frequency protective relays have been set in accordance with Requirement R1 such as dated setting sheets, calibration sheets or other documentation.
- M2.** Each Generator Owner shall have evidence that generator voltage protective relays have been set in accordance with Requirement R2 such as dated setting sheets, voltage-time curves, calibration sheets, coordination plots, dynamic simulation studies or other documentation.
- M3.** Each Generator Owner shall have evidence that it has documented and communicated any known regulatory or equipment limitations (excluding limitations noted in footnote 3) that resulted in an exception to Requirements R1 or R2 in accordance with Requirement

³ Excludes limitations that are caused by the setting capability of the generator frequency and voltage protective relays themselves but does not exclude limitations originating in the equipment that they protect.

R3 such as a dated email or letter that contains such documentation as study results, experience from an actual event, or manufacturer’s advice.

- M4.** Each Generator Owner shall have evidence that it communicated applicable generator protective relay trip settings in accordance with Requirement R4, such as dated e-mails, correspondence or other evidence and copies of any requests it has received for that information.

D. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority

The Regional Entity shall serve as the Compliance Enforcement Authority (CEA) unless the applicable entity is owned, operated, or controlled by the Regional Entity. In such cases, the ERO or a Regional Entity approved by FERC or other applicable governmental authority shall serve as the CEA.

1.2. Data Retention

The following evidence retention periods identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

The Generator Owner shall retain evidence of compliance with Requirement R1 through R4; for 3 years or until the next audit, whichever is longer.

If a Generator Owner is found non-compliant, the Generator Owner shall keep information related to the non-compliance until mitigation is complete and approved for the time period specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Assessment Processes

Compliance Audit

Self-Certification

Spot Checking

Compliance Investigation

Self-Reporting

Complaint

1.4. Additional Compliance Information

None

Standard PRC-024-1 — Generator Frequency and Voltage Protective Relay Settings

2. Violation Severity Levels

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	N/A	N/A	N/A	The Generator Owner that has frequency protection activated to trip a generating unit, failed to set its generator frequency protective relaying so that it does not trip within the criteria listed in Requirement R1 unless there is a documented and communicated regulatory or equipment limitation per Requirement R3.
R2	N/A	N/A	N/A	The Generator Owner with voltage protective relaying activated to trip a generating unit, failed to set its voltage protective relaying so that it does not trip as a result of a voltage excursion at the point of interconnection, caused by an event external to the plant per the criteria specified in Requirement R2 unless there is a documented and communicated regulatory or equipment limitation per Requirement R3.
R3	The Generator Owner documented the known non-protection system equipment limitation that prevented it from meeting the criteria in Requirement R1 or R2 and communicated the documented limitation to its Planning Coordinator and Transmission Planner	The Generator Owner documented the known non-protection system equipment limitation that prevented it from meeting the criteria in Requirement R1 or R2 and communicated the documented limitation to its Planning Coordinator and Transmission Planner	The Generator Owner documented the known non-protection system equipment limitation that prevented it from meeting the criteria in Requirement R1 or R2 and communicated the documented limitation to its Planning Coordinator and Transmission Planner	The Generator Owner failed to document any known non-protection system equipment limitation that prevented it from meeting the criteria in Requirement R1 or R2. OR The Generator Owner failed to communicate

Standard PRC-024-1 — Generator Frequency and Voltage Protective Relay Settings

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
	more than 30 calendar days but less than or equal to 60 calendar days of identifying the limitation.	more than 60 calendar days but less than or equal to 90 calendar days of identifying the limitation.	more than 90 calendar days but less than or equal to 120 calendar days of identifying the limitation.	the documented limitation to its Planning Coordinator and Transmission Planner within 120 calendar days of identifying the limitation.
R4	<p>The Generator Owner provided its generator protection trip settings more than 60 calendar days but less than or equal to 90 calendar days of any change to those trip settings.</p> <p>OR</p> <p>The Generator Owner provided trip settings more than 60 calendar days but less than or equal to 90 calendar days of a written request.</p>	<p>The Generator Owner provided its generator protection trip settings more than 90 calendar days but less than or equal to 120 calendar days of any change to those trip settings.</p> <p>OR</p> <p>The Generator Owner provided trip settings more than 90 calendar days but less than or equal to 120 calendar days of a written request.</p>	<p>The Generator Owner provided its generator protection trip settings more than 120 calendar days but less than or equal to 150 calendar days of any change to those trip settings.</p> <p>OR</p> <p>The Generator Owner provided trip settings more than 120 calendar days but less than or equal to 150 calendar days of a written request.</p>	<p>The Generator Owner failed to provide its generator protection trip settings within 150 calendar days of any change to those trip settings.</p> <p>OR</p> <p>The Generator Owner failed to provide trip settings within 150 calendar days of a written request.</p>

E. Regional Variances

None

F. Associated Documents

None

Version History


Version	Date	Action	Change Tracking
1	May 9, 2013	Adopted by the NERC Board of Trustees	
1	March 20, 2014	FERC Order issued approving PRC-024-1. (Order becomes effective on 7/1/16.)	

G. References

1. “The Technical Justification for the New WECC Voltage Ride-Through (VRT) Standard, A White Paper Developed by the Wind Generation Task Force (WGTF),” dated June 13, 2007, a guideline approved by WECC Technical Studies Subcommittee.

PRC-024 — Attachment 1

OFF NOMINAL FREQUENCY CAPABILITY CURVE

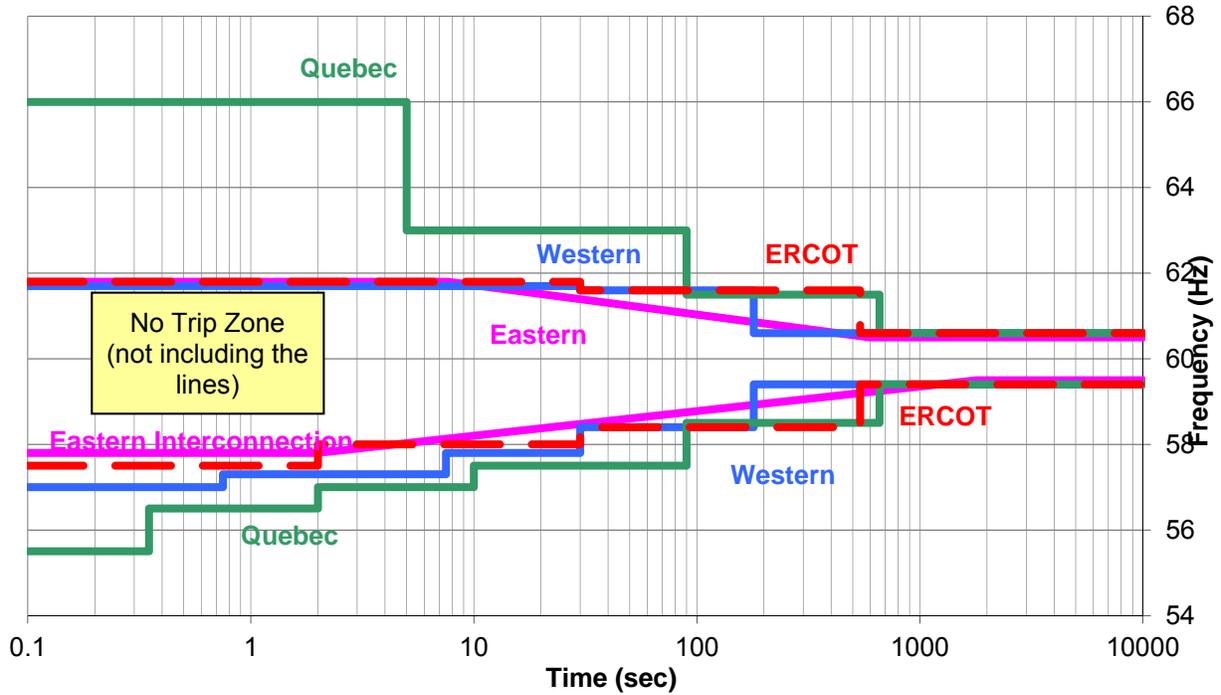

Curve Data Points:

Eastern Interconnection

High Frequency Duration		Low Frequency Duration	
Frequency (Hz)	Time (Sec)	Frequency (Hz)	Time (sec)
≥61.8	Instantaneous trip	≤57.8	Instantaneous trip
≥60.5	$10^{(90.935-1.45713*f)}$	≤59.5	$10^{(1.7373*f-100.116)}$
<60.5	Continuous operation	> 59.5	Continuous operation

Standard PRC-024-1 — Generator Frequency and Voltage Protective Relay Settings

Western Interconnection

High Frequency Duration		Low Frequency Duration	
Frequency (Hz)	Time (Sec)	Frequency (Hz)	Time (sec)
≥61.7	Instantaneous trip	≤57.0	Instantaneous trip
≥61.6	30	≤57.3	0.75
≥60.6	180	≤57.8	7.5
<60.6	Continuous operation	≤58.4	30
		≤59.4	180
		>59.4	Continuous operation


Quebec Interconnection

High Frequency Duration		Low Frequency Duration	
Frequency (Hz)	Time (Sec)	Frequency (Hz)	Time (Sec)
>66.0	Instantaneous trip	<55.5	Instantaneous trip
≥63.0	5	≤56.5	0.35
≥61.5	90	≤57.0	2
≥60.6	660	≤57.5	10
<60.6	Continuous operation	≤58.5	90
		≤59.4	660
		>59.4	Continuous operation

ERCOT Interconnection

High Frequency Duration		Low Frequency Duration	
Frequency (Hz)	Time (Sec)	Frequency (Hz)	Time (sec)
≥61.8	Instantaneous trip	≤57.5	Instantaneous trip
≥61.6	30	≤58.0	2
≥60.6	540	≤58.4	30
<60.6	Continuous operation	≤59.4	540
		>59.4	Continuous operation

PRC-024— Attachment 2

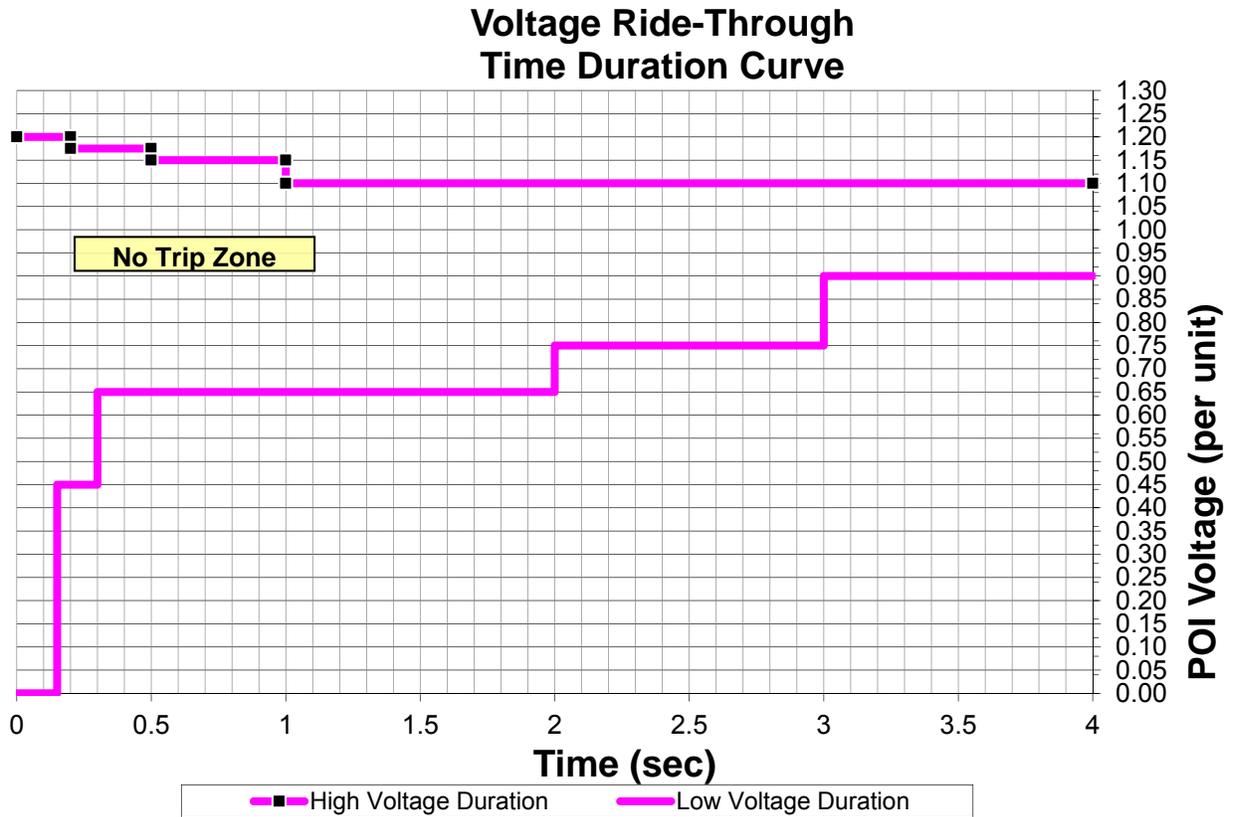

Ride Through Duration:

High Voltage Ride Through Duration		Low Voltage Ride Through Duration	
Voltage (pu)	Time (sec)	Voltage (pu)	Time (sec)
≥1.200	Instantaneous trip	<0.45	0.15
≥1.175	0.20	<0.65	0.30
≥1.15	0.50	<0.75	2.00
≥1.10	1.00	<0.90	3.00

Voltage Ride-Through Curve Clarifications

Curve Details:

1. The per unit voltage base for these curves is the nominal operating voltage specified by the Transmission Planner in the analysis of the reliability of the Interconnected Transmission Systems at the point of interconnection to the Bulk Electric System (BES).
2. The curves depicted were derived based on three-phase transmission system zone 1 faults with Normal Clearing not exceeding 9 cycles. The curves apply to voltage excursions regardless of the type of initiating event.
3. The envelope within the curves represents the cumulative voltage duration at the point of interconnection with the BES. For example, if the voltage first exceeds 1.15 pu at 0.3 seconds after a fault, does not exceed 1.2 pu voltage, and returns below 1.15 pu at 0.4 seconds, then the cumulative time the voltage is above 1.15 pu voltage is 0.1 seconds and is within the no trip zone of the curve.
4. The curves depicted assume system frequency is 60 Hertz. When evaluating Volts/Hertz protection, you may adjust the magnitude of the high voltage curve in proportion to deviations of frequency below 60 Hz.
5. Voltages in the curve assume minimum fundamental frequency phase-to-ground or phase-to-phase voltage for the low voltage duration curve and the greater of maximum RMS or crest phase-to-phase voltage for the high voltage duration curve.

Evaluating Protective Relay Settings:

1. Use either the following assumptions or loading conditions that are believed to be the most probable for the unit under study to evaluate voltage protection relay setting calculations on the static case for steady state initial conditions:
 - a. All of the units connected to the same transformer are online and operating.
 - b. All of the units are at full nameplate real-power output.
 - c. Power factor is 0.95 lagging (i.e. supplying reactive power to the system) as measured at the generator terminals.
 - d. The automatic voltage regulator is in automatic voltage control mode.
2. Evaluate voltage protection relay settings assuming that additional installed generating plant reactive support equipment (such as static VAr compensators, synchronous condensers, or capacitors) is available and operating normally.
3. Evaluate voltage protection relay settings accounting for the actual tap settings of transformers between the generator terminals and the point of interconnection.

Exhibit A (3): Updated NERC Glossary of Terms

Glossary of Terms Used in NERC Reliability Standards

Updated May 8, 2014

Introduction:

This Glossary lists each term that was defined for use in one or more of NERC's continent-wide or Regional Reliability Standards and adopted by the NERC Board of Trustees from February 8, 2005 through May 8, 2014.

This reference is divided into two sections, and each section is organized in alphabetical order. The first section identifies all terms that have been adopted by the NERC Board of Trustees for use in continent-wide standards; the second section identifies all terms that have been adopted by the NERC Board of Trustees for use in regional standards. (WECC, NPCC and ReliabilityFirst are the only Regions that have definitions approved by the NERC Board of Trustees. If other Regions develop definitions for approved Regional Standards using a NERC-approved standards development process, those definitions will be added to the Regional Definitions section of this glossary.)

Most of the terms identified in this glossary were adopted as part of the development of NERC's initial set of reliability standards, called the "Version 0" standards. Subsequent to the development of Version 0 standards, new definitions have been developed and approved following NERC's Reliability Standards Development Process, and added to this glossary following board adoption, with the "FERC approved" date added following a final Order approving the definition.

Immediately under each term is a link to the archive for the development of that term.

Definitions that have been adopted by the NERC Board of Trustees but have not been approved by FERC, or FERC has not approved but has directed be modified, are shaded in blue. Definitions that have been remanded or retired are shaded in orange.

Any comments regarding this glossary should be reported to the following:
sarcomm@nerc.com with "Glossary Comment" in the subject line.

Continent-wide Definitions:

A..... 5

B..... 10

C..... 22

D..... 27

E..... 30

F..... 33

G..... 37

H..... 38

I..... 39

J..... 43

L..... 44

M..... 44

N..... 46

O..... 49

P..... 53

R..... 59

S..... 71

T..... 78

V..... 78

W..... 83

Y 79

Regional Definitions:

ERCOT Regional Definitions 80

NPCC Regional Definitions 82

Reliability*First* Regional Definitions 83

WECC Regional Definitions 84

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
Adequacy [Archive]		2/8/2005	3/16/2007	The ability of the electric system to supply the aggregate electrical demand and energy requirements of the end-use customers at all times, taking into account scheduled and reasonably expected unscheduled outages of system elements.
Adjacent Balancing Authority [Archive]		2/8/2005	3/16/2007	A Balancing Authority Area that is interconnected another Balancing Authority Area either directly or via a multi-party agreement or transmission tariff.
Adjacent Balancing Authority [Archive]		2/6/2014		A Balancing Authority whose Balancing Authority Area is interconnected with another Balancing Authority Area either directly or via a multi-party agreement or transmission tariff.
Adverse Reliability Impact [Archive]		2/7/2006	3/16/2007	The impact of an event that results in frequency-related instability; unplanned tripping of load or generation; or uncontrolled separation or cascading outages that affects a widespread area of the Interconnection.
Adverse Reliability Impact [Archive]		8/4/2011		The impact of an event that results in Bulk Electric System instability or Cascading.
After the Fact [Archive]	ATF	10/29/2008	12/17/2009	A time classification assigned to an RFI when the submittal time is greater than one hour after the start time of the RFI.
Agreement [Archive]		2/8/2005	3/16/2007	A contract or arrangement, either written or verbal and sometimes enforceable by law.

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
Alternative Interpersonal Communication [Archive]		11/7/2012		Any Interpersonal Communication that is able to serve as a substitute for, and does not utilize the same infrastructure (medium) as, Interpersonal Communication used for day-to-day operation.
Altitude Correction Factor [Archive]		2/7/2006	3/16/2007	A multiplier applied to specify distances, which adjusts the distances to account for the change in relative air density (RAD) due to altitude from the RAD used to determine the specified distance. Altitude correction factors apply to both minimum worker approach distances and to minimum vegetation clearance distances.
Ancillary Service [Archive]		2/8/2005	3/16/2007	Those services that are necessary to support the transmission of capacity and energy from resources to loads while maintaining reliable operation of the Transmission Service Provider's transmission system in accordance with good utility practice. (<i>From FERC order 888-A.</i>)
Anti-Aliasing Filter [Archive]		2/8/2005	3/16/2007	An analog filter installed at a metering point to remove the high frequency components of the signal over the AGC sample period.
Area Control Error [Archive]	ACE	2/8/2005	3/16/2007 (Becomes inactive 3/31/14)	The instantaneous difference between a Balancing Authority's net actual and scheduled interchange, taking into account the effects of Frequency Bias and correction for meter error.

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
Area Control Error [Archive]	ACE	12/19/2012	10/16/2013 (Becomes effective 4/1/2014)	The instantaneous difference between a Balancing Authority's net actual and scheduled interchange, taking into account the effects of Frequency Bias, correction for meter error, and Automatic Time Error Correction (ATEC), if operating in the ATEC mode. ATEC is only applicable to Balancing Authorities in the Western Interconnection.
Area Interchange Methodology [Archive]		08/22/2008	11/24/2009	The Area Interchange methodology is characterized by determination of incremental transfer capability via simulation, from which Total Transfer Capability (TTC) can be mathematically derived. Capacity Benefit Margin, Transmission Reliability Margin, and Existing Transmission Commitments are subtracted from the TTC, and Postbacks and counterflows are added, to derive Available Transfer Capability. Under the Area Interchange Methodology, TTC results are generally reported on an area to area basis.
Arranged Interchange [Archive]		5/2/2006	3/16/2007	The state where the Interchange Authority has received the Interchange information (initial or revised).
Arranged Interchange [Archive]		2/6/2014		The state where a Request for Interchange (initial or revised) has been submitted for approval.
Attaining Balancing Authority [Archive]		2/6/2014		A Balancing Authority bringing generation or load into its effective control boundaries through a Dynamic Transfer from the Native Balancing Authority.
Automatic Generation Control [Archive]	AGC	2/8/2005	3/16/2007	Equipment that automatically adjusts generation in a Balancing Authority Area from a central location to maintain the Balancing Authority's interchange schedule plus Frequency Bias. AGC may also accommodate automatic inadvertent payback and time error correction.

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
Available Flowgate Capability [Archive]	AFC	08/22/2008	11/24/2009	A measure of the flow capability remaining on a Flowgate for further commercial activity over and above already committed uses. It is defined as TFC less Existing Transmission Commitments (ETC), less a Capacity Benefit Margin, less a Transmission Reliability Margin, plus Postbacks, and plus counterflows.
Available Transfer Capability [Archive]	ATC	2/8/2005	3/16/2007	A measure of the transfer capability remaining in the physical transmission network for further commercial activity over and above already committed uses. It is defined as Total Transfer Capability less existing transmission commitments (including retail customer service), less a Capacity Benefit Margin, less a Transmission Reliability Margin.
Available Transfer Capability [Archive]	ATC	08/22/2008	11/24/2009	A measure of the transfer capability remaining in the physical transmission network for further commercial activity over and above already committed uses. It is defined as Total Transfer Capability less Existing Transmission Commitments (including retail customer service), less a Capacity Benefit Margin, less a Transmission Reliability Margin, plus Postbacks, plus counterflows.
Available Transfer Capability Implementation Document [Archive]	ATCID	08/22/2008	11/24/2009	A document that describes the implementation of a methodology for calculating ATC or AFC, and provides information related to a Transmission Service Provider's calculation of ATC or AFC.

Continent-wide Term	Acronym	BOT Approval Date	FERC Approval Date	Definition
ATC Path [Archive]		08/22/2008	Not approved; Modification directed 11/24/09	Any combination of Point of Receipt and Point of Delivery for which ATC is calculated; and any Posted Path ¹ .

¹ See 18 CFR 37.6(b)(1)

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Balancing Authority [Archive]	BA	2/8/2005	3/16/2007	The responsible entity that integrates resource plans ahead of time, maintains load-interchange-generation balance within a Balancing Authority Area, and supports Interconnection frequency in real time.
Balancing Authority Area [Archive]		2/8/2005	3/16/2007	The collection of generation, transmission, and loads within the metered boundaries of the Balancing Authority. The Balancing Authority maintains load-resource balance within this area.
Base Load [Archive]		2/8/2005	3/16/2007	The minimum amount of electric power delivered or required over a given period at a constant rate.
BES Cyber Asset [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/16)	A Cyber Asset that if rendered unavailable, degraded, or misused would, within 15 minutes of its required operation, misoperation, or non-operation, adversely impact one or more Facilities, systems, or equipment, which, if destroyed, degraded, or otherwise rendered unavailable when needed, would affect the reliable operation of the Bulk Electric System. Redundancy of affected Facilities, systems, and equipment shall not be considered when determining adverse impact. Each BES Cyber Asset is included in one or more BES Cyber Systems. (A Cyber Asset is not a BES Cyber Asset if, for 30 consecutive calendar days or less, it is directly connected to a network within an ESP, a Cyber Asset within an ESP, or to a BES Cyber Asset, and it is used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.)

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
BES Cyber System [Archive]		11/26/12	11/22/13 (Becomes effective 4/1/16)	One or more BES Cyber Assets logically grouped by a responsible entity to perform one or more reliability tasks for a functional entity.
BES Cyber System Information [Archive]		11/26/12	11/22/13 (Becomes effective 4/1/16)	Information about the BES Cyber System that could be used to gain unauthorized access or pose a security threat to the BES Cyber System. BES Cyber System Information does not include individual pieces of information that by themselves do not pose a threat or could not be used to allow unauthorized access to BES Cyber Systems, such as, but not limited to, device names, individual IP addresses without context, ESP names, or policy statements. Examples of BES Cyber System Information may include, but are not limited to, security procedures or security information about BES Cyber Systems, Physical Access Control Systems, and Electronic Access Control or Monitoring Systems that is not publicly available and could be used to allow unauthorized access or unauthorized distribution; collections of network addresses; and network topology of the BES Cyber System.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Blackstart Capability Plan [Archive]		2/8/2005 Will be retired when EOP-005-2 becomes enforceable on (7/1/13)	3/16/2007	A documented procedure for a generating unit or station to go from a shutdown condition to an operating condition delivering electric power without assistance from the electric system. This procedure is only a portion of an overall system restoration plan.
Blackstart Resource [Archive]		8/5/2009	3/17/11	A generating unit(s) and its associated set of equipment which has the ability to be started without support from the System or is designed to remain energized without connection to the remainder of the System, with the ability to energize a bus, meeting the Transmission Operator’s restoration plan needs for real and reactive power capability, frequency and voltage control, and that has been included in the Transmission Operator’s restoration plan.
Block Dispatch [Archive]		08/22/2008	11/24/2009	A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, the capacity of a given generator is segmented into loadable “blocks,” each of which is grouped and ordered relative to other blocks (based on characteristics including, but not limited to, efficiency, run of river or fuel supply considerations, and/or “must-run” status).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System [Archive]	BES	2/8/2005	3/16/2007 (Becomes inactive on 6/30/14)	As defined by the Regional Reliability Organization, the electrical generation resources, transmission lines, interconnections with neighboring systems, and associated equipment, generally operated at voltages of 100 kV or higher. Radial transmission facilities serving only load with one transmission source are generally not included in this definition.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System ² [Archive]	BES	01/18/2012	6/14/13 (Replaced by BES definition FERC approved 3/20/14)	<p>Unless modified by the lists shown below, all Transmission Elements operated at 100 kV or higher and Real Power and Reactive Power resources connected at 100 kV or higher. This does not include facilities used in the local distribution of electric energy.</p> <p>Inclusions:</p> <ul style="list-style-type: none"> • I1 - Transformers with the primary terminal and at least one secondary terminal operated at 100 kV or higher unless excluded under Exclusion E1 or E3. • I2 - Generating resource(s) with gross individual nameplate rating greater than 20 MVA or gross plant/facility aggregate nameplate rating greater than 75 MVA including the generator terminals through the high-side of the step-up transformer(s) connected at a voltage of 100 kV or above. • I3 - Blackstart Resources identified in the Transmission Operator’s restoration plan. • I4 - Dispersed power producing resources with aggregate capacity greater than 75 MVA (gross aggregate nameplate rating) utilizing a system designed primarily for aggregating capacity, connected at a common point at a voltage of 100 kV or above.

² FERC issued an order on April 18, 2013 approving the revised definition with an effective date of July 1, 2013. On June 14, 2013, FERC granted NERC’s request to extend the effective date of the revised definition of the Bulk Electric System to July 1, 2014.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<p>I5 –Static or dynamic devices (excluding generators) dedicated to supplying or absorbing Reactive Power that are connected at 100 kV or higher, or through a dedicated transformer with a high-side voltage of 100 kV or higher, or through a transformer that is designated in Inclusion I1.</p> <p>Exclusions:</p> <ul style="list-style-type: none"> • E1 - Radial systems: A group of contiguous transmission Elements that emanates from a single point of connection of 100 kV or higher and: <ul style="list-style-type: none"> a) Only serves Load. Or, b) Only includes generation resources, not identified in Inclusion I3, with an aggregate capacity less than or equal to 75 MVA (gross nameplate rating). Or, c) Where the radial system serves Load and includes generation resources, not identified in Inclusion I3, with an aggregate capacity of non-retail generation less than or equal to 75 MVA (gross nameplate rating). <p>Note – A normally open switching device between radial systems, as depicted on prints or one-line diagrams for example, does not affect this exclusion.</p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<ul style="list-style-type: none"> • E2 - A generating unit or multiple generating units on the customer’s side of the retail meter that serve all or part of the retail Load with electric energy if: (i) the net capacity provided to the BES does not exceed 75 MVA, and (ii) standby, back-up, and maintenance power services are provided to the generating unit or multiple generating units or to the retail Load by a Balancing Authority, or provided pursuant to a binding obligation with a Generator Owner or Generator Operator, or under terms approved by the applicable regulatory authority. • E3 - Local networks (LN): A group of contiguous transmission Elements operated at or above 100 kV but less than 300 kV that distribute power to Load rather than transfer bulk power across the interconnected system. LN’s emanate from multiple points of connection at 100 kV or higher to improve the level of service to retail customer Load and not to accommodate bulk power transfer across the interconnected system. The LN is characterized by all of the following:

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<p>a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusion I3 and do not have an aggregate capacity of non-retail generation greater than 75 MVA (gross nameplate rating);</p> <p>b) Power flows only into the LN and the LN does not transfer energy originating outside the LN for delivery through the LN; and</p> <p>c) Not part of a Flowgate or transfer path: The LN does not contain a monitored Facility of a permanent Flowgate in the Eastern Interconnection, a major transfer path within the Western Interconnection, or a comparable monitored Facility in the ERCOT or Quebec Interconnections, and is not a monitored Facility included in an Interconnection Reliability Operating Limit (IROL).</p> <ul style="list-style-type: none"> • E4 – Reactive Power devices owned and operated by the retail customer solely for its own use. Note - Elements may be included or excluded on a case-by-case basis through the Rules of Procedure exception process.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System [Archive]	BES	11/21/2013	3/20/14 (Becomes effective 7/1/2014) (Please see the Implementation Plan for Phase 2 Compliance obligations.)	Unless modified by the lists shown below, all Transmission Elements operated at 100 kV or higher and Real Power and Reactive Power resources connected at 100 kV or higher. This does not include facilities used in the local distribution of electric energy. Inclusions: <ul style="list-style-type: none"> • I1 - Transformers with the primary terminal and at least one secondary terminal operated at 100 kV or higher unless excluded by application of Exclusion E1 or E3. • I2 - Generating resource(s) including the generator terminals through the high-side of the step-up transformer(s) connected at a voltage of 100 kV or above with: <ul style="list-style-type: none"> a) Gross individual nameplate rating greater than 20 MVA. Or, b) Gross plant/facility aggregate nameplate rating greater than 75 MVA. • I3 - Blackstart Resources identified in the Transmission Operator’s restoration plan. • I4 - Dispersed power producing resources that aggregate to a total capacity greater than 75 MVA (gross nameplate rating), and that are connected through a system designed primarily for delivering such capacity to a common point of connection at a voltage of 100 kV or above. Thus, the facilities designated as BES are:

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<ul style="list-style-type: none"> a) The individual resources, and b) The system designed primarily for delivering capacity from the point where those resources aggregate to greater than 75 MVA to a common point of connection at a voltage of 100 kV or above. <ul style="list-style-type: none"> • I5 –Static or dynamic devices (excluding generators) dedicated to supplying or absorbing Reactive Power that are connected at 100 kV or higher, or through a dedicated transformer with a high-side voltage of 100 kV or higher, or through a transformer that is designated in Inclusion I1 unless excluded by application of Exclusion E4. <p>Exclusions:</p> <ul style="list-style-type: none"> • E1 - Radial systems: A group of contiguous transmission Elements that emanates from a single point of connection of 100 kV or higher and: <ul style="list-style-type: none"> a) Only serves Load. Or, b) Only includes generation resources, not identified in Inclusions I2, I3, or I4, with an aggregate capacity less than or equal to 75 MVA (gross nameplate rating). Or, c) Where the radial system serves Load and includes generation resources, not identified in Inclusions I2, I3 or I4, with an aggregate capacity of non-retail generation less than or equal to 75 MVA (gross nameplate rating).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<p>Note 1 – A normally open switching device between radial systems, as depicted on prints or one-line diagrams for example, does not affect this exclusion.</p> <p>Note 2 – The presence of a contiguous loop, operated at a voltage level of 50 kV or less, between configurations being considered as radial systems, does not affect this exclusion.</p> <ul style="list-style-type: none"> • E2 - A generating unit or multiple generating units on the customer’s side of the retail meter that serve all or part of the retail Load with electric energy if: (i) the net capacity provided to the BES does not exceed 75 MVA, and (ii) standby, back-up, and maintenance power services are provided to the generating unit or multiple generating units or to the retail Load by a Balancing Authority, or provided pursuant to a binding obligation with a Generator Owner or Generator Operator, or under terms approved by the applicable regulatory authority. • E3 - Local networks (LN): A group of contiguous transmission Elements operated at less than 300 kV that distribute power to Load rather than transfer bulk power across the interconnected system. LN’s emanate from multiple points of connection at 100 kV or higher to improve the level of service to retail customers and not to accommodate bulk power transfer across the interconnected system. The LN is characterized by all of the following: <ul style="list-style-type: none"> a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusions I2, I3, or I4 and do not have an aggregate capacity of non-retail

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Bulk Electric System (Continued)	BES			<p>generation greater than 75 MVA (gross nameplate rating);</p> <p>b) Real Power flows only into the LN and the LN does not transfer energy originating outside the LN for delivery through the LN; and</p> <p>c) Not part of a Flowgate or transfer path: The LN does not contain any part of a permanent Flowgate in the Eastern Interconnection, a major transfer path within the Western Interconnection, or a comparable monitored Facility in the ERCOT or Quebec Interconnections, and is not a monitored Facility included in an Interconnection Reliability Operating Limit (IROL).</p> <ul style="list-style-type: none"> • E4 – Reactive Power devices installed for the sole benefit of a retail customer(s). <p>Note - Elements may be included or excluded on a case-by-case basis through the Rules of Procedure exception process.</p>
Bulk-Power System [Archive]		5/9/2013	7/9/2013	<p>A) facilities and control systems necessary for operating an interconnected electric energy transmission network (or any portion thereof); and (B) electric energy from generation facilities needed to maintain transmission system reliability. The term does not include facilities used in the local distribution of electric energy.</p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Burden [Archive]		2/8/2005	3/16/2007	Operation of the Bulk Electric System that violates or is expected to violate a System Operating Limit or Interconnection Reliability Operating Limit in the Interconnection, or that violates any other NERC, Regional Reliability Organization, or local operating reliability standards or criteria.
Business Practices [Archive]		8/22/2008	Not approved; Modification directed 11/24/09	Those business rules contained in the Transmission Service Provider’s applicable tariff, rules, or procedures; associated Regional Reliability Organization or regional entity business practices; or NAESB Business Practices.
Bus-tie Breaker [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/15)	A circuit breaker that is positioned to connect two individual substation bus configurations.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Capacity Benefit Margin [Archive]	CBM	2/8/2005	3/16/2007	The amount of firm transmission transfer capability preserved by the transmission provider for Load-Serving Entities (LSEs), whose loads are located on that Transmission Service Provider’s system, to enable access by the LSEs to generation from interconnected systems to meet generation reliability requirements. Preservation of CBM for an LSE allows that entity to reduce its installed generating capacity below that which may otherwise have been necessary without interconnections to meet its generation reliability requirements. The transmission transfer capability preserved as CBM is intended to be used by the LSE only in times of emergency generation deficiencies.
Capacity Benefit Margin Implementation Document [Archive]	CBMID	11/13/2008	11/24/2009	A document that describes the implementation of a Capacity Benefit Margin methodology.
Capacity Emergency [Archive]		2/8/2005	3/16/2007	A capacity emergency exists when a Balancing Authority Area’s operating capacity, plus firm purchases from other systems, to the extent available or limited by transfer capability, is inadequate to meet its demand plus its regulating requirements.
Cascading [Archive]		2/8/2005	3/16/2007	The uncontrolled successive loss of system elements triggered by an incident at any location. Cascading results in widespread electric service interruption that cannot be restrained from sequentially spreading beyond an area predetermined by studies.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Cascading Outages [Archive]		11/1/2006 Withdrawn 2/12/2008	FERC Remanded 12/27/2007	The uncontrolled successive loss of Bulk Electric System Facilities triggered by an incident (or condition) at any location resulting in the interruption of electric service that cannot be restrained from spreading beyond a pre-determined area.
CIP Exceptional Circumstance [Archive]		11/26/12	11/22/13 (Becomes effective 4/1/16)	A situation that involves or threatens to involve one or more of the following, or similar, conditions that impact safety or BES reliability: a risk of injury or death; a natural disaster; civil unrest; an imminent or existing hardware, software, or equipment failure; a Cyber Security Incident requiring emergency assistance; a response by emergency services; the enactment of a mutual assistance agreement; or an impediment of large scale workforce availability.
CIP Senior Manager [Archive]		11/26/12	11/22/13 (Becomes effective 4/1/16)	A single senior management official with overall authority and responsibility for leading and managing implementation of and continuing adherence to the requirements within the NERC CIP Standards, CIP-002 through CIP-011.
Clock Hour [Archive]		2/8/2005	3/16/2007	The 60-minute period ending at :00. All surveys, measurements, and reports are based on Clock Hour periods unless specifically noted.
Cogeneration [Archive]		2/8/2005	3/16/2007	Production of electricity from steam, heat, or other forms of energy produced as a by-product of another process.
Compliance Monitor [Archive]		2/8/2005	3/16/2007	The entity that monitors, reviews, and ensures compliance of responsible entities with reliability standards.
Composite Confirmed Interchange [Archive]		2/6/2014		The energy profile (including non-default ramp) throughout a given time period, based on the aggregate of all Confirmed Interchange occurring in that time period.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Confirmed Interchange [Archive]		5/2/2006	3/16/2007	The state where the Interchange Authority has verified the Arranged Interchange.
Confirmed Interchange [Archive]		2/6/2014		The state where no party has denied and all required parties have approved the Arranged Interchange.
Congestion Management Report [Archive]		2/8/2005	3/16/2007	A report that the Interchange Distribution Calculator issues when a Reliability Coordinator initiates the Transmission Loading Relief procedure. This report identifies the transactions and native and network load curtailments that must be initiated to achieve the loading relief requested by the initiating Reliability Coordinator.
Consequential Load Loss [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/15)	All Load that is no longer served by the Transmission system as a result of Transmission Facilities being removed from service by a Protection System operation designed to isolate the fault.
Constrained Facility [Archive]		2/8/2005	3/16/2007	A transmission facility (line, transformer, breaker, etc.) that is approaching, is at, or is beyond its System Operating Limit or Interconnection Reliability Operating Limit.
Contingency [Archive]		2/8/2005	3/16/2007	The unexpected failure or outage of a system component, such as a generator, transmission line, circuit breaker, switch or other electrical element.
Contingency Reserve [Archive]		2/8/2005	3/16/2007	The provision of capacity deployed by the Balancing Authority to meet the Disturbance Control Standard (DCS) and other NERC and Regional Reliability Organization contingency requirements.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Contract Path [Archive]		2/8/2005	3/16/2007	An agreed upon electrical path for the continuous flow of electrical power between the parties of an Interchange Transaction.
Control Center [Archive]		11/26/12	11/22/13 (Becomes effective 4/1/16)	One or more facilities hosting operating personnel that monitor and control the Bulk Electric System (BES) in real-time to perform the reliability tasks, including their associated data centers, of: 1) a Reliability Coordinator, 2) a Balancing Authority, 3) a Transmission Operator for transmission Facilities at two or more locations, or 4) a Generator Operator for generation Facilities at two or more locations.
Control Performance Standard [Archive]	CPS	2/8/2005	3/16/2007	The reliability standard that sets the limits of a Balancing Authority's Area Control Error over a specified time period.
Corrective Action Plan [Archive]		2/7/2006	3/16/2007	A list of actions and an associated timetable for implementation to remedy a specific problem.
Cranking Path [Archive]		5/2/2006	3/16/2007	A portion of the electric system that can be isolated and then energized to deliver electric power from a generation source to enable the startup of one or more other generating units.
Critical Assets [Archive]		5/2/2006	1/18/2008 (Becomes inactive 3/31/16)	Facilities, systems, and equipment which, if destroyed, degraded, or otherwise rendered unavailable, would affect the reliability or operability of the Bulk Electric System.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Critical Cyber Assets [Archive]		5/2/2006	1/18/2008 (Becomes inactive 3/31/16)	Cyber Assets essential to the reliable operation of Critical Assets.
Curtailment [Archive]		2/8/2005	3/16/2007	A reduction in the scheduled capacity or energy delivery of an Interchange Transaction.
Curtailment Threshold [Archive]		2/8/2005	3/16/2007	The minimum Transfer Distribution Factor which, if exceeded, will subject an Interchange Transaction to curtailment to relieve a transmission facility constraint.
Cyber Assets [Archive]		5/2/2006	1/18/2008 (Becomes inactive 3/31/16)	Programmable electronic devices and communication networks including hardware, software, and data.
Cyber Assets [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/16)	Programmable electronic devices, including the hardware, software, and data in those devices.
Cyber Security Incident [Archive]		5/2/2006	1/18/2008 (Becomes inactive 3/31/16)	Any malicious act or suspicious event that: <ul style="list-style-type: none"> • Compromises, or was an attempt to compromise, the Electronic Security Perimeter or Physical Security Perimeter of a Critical Cyber Asset, or, • Disrupts, or was an attempt to disrupt, the operation of a Critical Cyber Asset.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Cyber Security Incident [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/16)	A malicious act or suspicious event that: <ul style="list-style-type: none"> • Compromises, or was an attempt to compromise, the Electronic Security Perimeter or Physical Security Perimeter or, • Disrupts, or was an attempt to disrupt, the operation of a BES Cyber System.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Delayed Fault Clearing [Archive]		11/1/2006	12/27/2007	Fault clearing consistent with correct operation of a breaker failure protection system and its associated breakers, or of a backup protection system with an intentional time delay.
Demand [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. The rate at which electric energy is delivered to or by a system or part of a system, generally expressed in kilowatts or megawatts, at a given instant or averaged over any designated interval of time. 2. The rate at which energy is being used by the customer.
Demand-Side Management [Archive]	DSM	2/8/2005	3/16/2007	The term for all activities or programs undertaken by Load-Serving Entity or its customers to influence the amount or timing of electricity they use.
Demand-Side Management [Archive]	DSM	5/6/2014		All activities or programs undertaken by any applicable entity to achieve a reduction in Demand.
Dial-up Connectivity [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/16)	A data communication link that is established when the communication equipment dials a phone number and negotiates a connection with the equipment on the other end of the link.
Direct Control Load Management [Archive]	DCLM	2/8/2005	3/16/2007	Demand-Side Management that is under the direct control of the system operator. DCLM may control the electric supply to individual appliances or equipment on customer premises. DCLM as defined here does not include Interruptible Demand.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Dispatch Order [Archive]		08/22/2008	11/24/2009	A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, each generator is ranked by priority.
Dispersed Load by Substations [Archive]		2/8/2005	3/16/2007	Substation load information configured to represent a system for power flow or system dynamics modeling purposes, or both.
Distribution Factor [Archive]	DF	2/8/2005	3/16/2007	The portion of an Interchange Transaction, typically expressed in per unit that flows across a transmission facility (Flowgate).
Distribution Provider [Archive]	DP	2/8/2005	3/16/2007	Provides and operates the “wires” between the transmission system and the end-use customer. For those end-use customers who are served at transmission voltages, the Transmission Owner also serves as the Distribution Provider. Thus, the Distribution Provider is not defined by a specific voltage, but rather as performing the Distribution function at any voltage.
Disturbance [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. An unplanned event that produces an abnormal system condition. 2. Any perturbation to the electric system. 3. The unexpected change in ACE that is caused by the sudden failure of generation or interruption of load.
Disturbance Control Standard [Archive]	DCS	2/8/2005	3/16/2007	The reliability standard that sets the time limit following a Disturbance within which a Balancing Authority must return its Area Control Error to within a specified range.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Disturbance Monitoring Equipment [Archive]	DME	8/2/2006	3/16/2007	<p>Devices capable of monitoring and recording system data pertaining to a Disturbance. Such devices include the following categories of recorders³:</p> <ul style="list-style-type: none"> • Sequence of event recorders which record equipment response to the event • Fault recorders, which record actual waveform data replicating the system primary voltages and currents. This may include protective relays. • Dynamic Disturbance Recorders (DDRs), which record incidents that portray power system behavior during dynamic events such as low-frequency (0.1 Hz – 3 Hz) oscillations and abnormal frequency or voltage excursions
Dynamic Interchange Schedule or Dynamic Schedule [Archive]		2/8/2005	3/16/2007	A telemetered reading or value that is updated in real time and used as a schedule in the AGC/ACE equation and the integrated value of which is treated as a schedule for interchange accounting purposes. Commonly used for scheduling jointly owned generation to or from another Balancing Authority Area.
Dynamic Interchange Schedule or Dynamic Schedule [Archive]		2/6/2014		A time-varying energy transfer that is updated in Real-time and included in the Scheduled Net Interchange (NIS) term in the same manner as an Interchange Schedule in the affected Balancing Authorities’ control ACE equations (or alternate control processes).

³ Phasor Measurement Units and any other equipment that meets the functional requirements of DMEs may qualify as DMEs.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Dynamic Transfer [Archive]		2/8/2005	3/16/2007	The provision of the real-time monitoring, telemetering, computer software, hardware, communications, engineering, energy accounting (including inadvertent interchange), and administration required to electronically move all or a portion of the real energy services associated with a generator or load out of one Balancing Authority Area into another.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Economic Dispatch [Archive]		2/8/2005	3/16/2007	The allocation of demand to individual generating units on line to effect the most economical production of electricity.
Electronic Access Control or Monitoring Systems [Archive]	EACMS	11/26/12	11/22/2013 (Becomes effective 4/1/16)	Cyber Assets that perform electronic access control or electronic access monitoring of the Electronic Security Perimeter(s) or BES Cyber Systems. This includes Intermediate Systems.
Electronic Access Point [Archive]	EAP	11/26/12	11/22/2013 (Becomes effective 4/1/16)	A Cyber Asset interface on an Electronic Security Perimeter that allows routable communication between Cyber Assets outside an Electronic Security Perimeter and Cyber Assets inside an Electronic Security Perimeter.
Electrical Energy [Archive]		2/8/2005	3/16/2007	The generation or use of electric power by a device over a period of time, expressed in kilowatthours (kWh), megawatthours (MWh), or gigawatthours (GWh).
Electronic Security Perimeter [Archive]	ESP	5/2/2006	1/18/2008 (Becomes inactive 3/31/16)	The logical border surrounding a network to which Critical Cyber Assets are connected and for which access is controlled.
Electronic Security Perimeter [Archive]	ESP	11/26/12	11/22/2013 (Becomes effective 4/1/16)	The logical border surrounding a network to which BES Cyber Systems are connected using a routable protocol.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Element [Archive]		2/8/2005	3/16/2007	Any electrical device with terminals that may be connected to other electrical devices such as a generator, transformer, circuit breaker, bus section, or transmission line. An element may be comprised of one or more components.
Emergency or BES Emergency [Archive]		2/8/2005	3/16/2007	Any abnormal system condition that requires automatic or immediate manual action to prevent or limit the failure of transmission facilities or generation supply that could adversely affect the reliability of the Bulk Electric System.
Emergency Rating [Archive]		2/8/2005	3/16/2007	The rating as defined by the equipment owner that specifies the level of electrical loading or output, usually expressed in megawatts (MW) or Mvar or other appropriate units, that a system, facility, or element can support, produce, or withstand for a finite period. The rating assumes acceptable loss of equipment life or other physical or safety limitations for the equipment involved.
Emergency Request for Interchange [Archive]	Emergency RFI	10/29/2008	12/17/2009	Request for Interchange to be initiated for Emergency or Energy Emergency conditions.
Energy Emergency [Archive]		2/8/2005	3/16/2007	A condition when a Load-Serving Entity has exhausted all other options and can no longer provide its customers' expected energy requirements.
Equipment Rating [Archive]		2/7/2006	3/16/2007	The maximum and minimum voltage, current, frequency, real and reactive power flows on individual equipment under steady state, short-circuit and transient conditions, as permitted or assigned by the equipment owner.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
External Routable Connectivity [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/16)	The ability to access a BES Cyber System from a Cyber Asset that is outside of its associated Electronic Security Perimeter via a bi-directional routable protocol connection.
Existing Transmission Commitments [Archive]	ETC	08/22/2008	11/24/2009	Committed uses of a Transmission Service Provider's Transmission system considered when determining ATC or AFC.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Facility [Archive]		2/7/2006	3/16/2007	A set of electrical equipment that operates as a single Bulk Electric System Element (e.g., a line, a generator, a shunt compensator, transformer, etc.)
Facility Rating [Archive]		2/8/2005	3/16/2007	The maximum or minimum voltage, current, frequency, or real or reactive power flow through a facility that does not violate the applicable equipment rating of any equipment comprising the facility.
Fault [Archive]		2/8/2005	3/16/2007	An event occurring on an electric system such as a short circuit, a broken wire, or an intermittent connection.
Fire Risk [Archive]		2/7/2006	3/16/2007	The likelihood that a fire will ignite or spread in a particular geographic area.
Firm Demand [Archive]		2/8/2005	3/16/2007	That portion of the Demand that a power supplier is obligated to provide except when system reliability is threatened or during emergency conditions.
Firm Transmission Service [Archive]		2/8/2005	3/16/2007	The highest quality (priority) service offered to customers under a filed rate schedule that anticipates no planned interruption.
Flashover [Archive]		2/7/2006	3/16/2007	An electrical discharge through air around or over the surface of insulation, between objects of different potential, caused by placing a voltage across the air space that results in the ionization of the air space.
Flowgate [Archive]		2/8/2005	3/16/2007	A designated point on the transmission system through which the Interchange Distribution Calculator calculates the power flow from Interchange Transactions.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Flowgate [Archive]		08/22/2008	11/24/2009	<p>1.) A portion of the Transmission system through which the Interchange Distribution Calculator calculates the power flow from Interchange Transactions.</p> <p>2.) A mathematical construct, comprised of one or more monitored transmission Facilities and optionally one or more contingency Facilities, used to analyze the impact of power flows upon the Bulk Electric System.</p>
Flowgate Methodology [Archive]		08/22/2008	11/24/2009	The Flowgate methodology is characterized by identification of key Facilities as Flowgates. Total Flowgate Capabilities are determined based on Facility Ratings and voltage and stability limits. The impacts of Existing Transmission Commitments (ETCs) are determined by simulation. The impacts of ETC, Capacity Benefit Margin (CBM) and Transmission Reliability Margin (TRM) are subtracted from the Total Flowgate Capability, and Postbacks and counterflows are added, to determine the Available Flowgate Capability (AFC) value for that Flowgate. AFCs can be used to determine Available Transfer Capability (ATC).
Forced Outage [Archive]		2/8/2005	3/16/2007	<p>1. The removal from service availability of a generating unit, transmission line, or other facility for emergency reasons.</p> <p>2. The condition in which the equipment is unavailable due to unanticipated failure.</p>
Frequency Bias [Archive]		2/8/2005	3/16/2007	A value, usually expressed in megawatts per 0.1 Hertz (MW/0.1 Hz), associated with a Balancing Authority Area that approximates the Balancing Authority Area's response to Interconnection frequency error.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Frequency Bias Setting [Archive]		2/8/2005	3/16/2007 (Becomes inactive 3/31/15)	A value, usually expressed in MW/0.1 Hz, set into a Balancing Authority ACE algorithm that allows the Balancing Authority to contribute its frequency response to the Interconnection.
Frequency Bias Setting [Archive]		2/7/2013	1/16/2014 (Becomes effective 4/1/15)	A number, either fixed or variable, usually expressed in MW/0.1 Hz, included in a Balancing Authority's Area Control Error equation to account for the Balancing Authority's inverse Frequency Response contribution to the Interconnection, and discourage response withdrawal through secondary control systems.
Frequency Deviation [Archive]		2/8/2005	3/16/2007	A change in Interconnection frequency.
Frequency Error [Archive]		2/8/2005	3/16/2007	The difference between the actual and scheduled frequency. ($F_A - F_S$)
Frequency Regulation [Archive]		2/8/2005	3/16/2007	The ability of a Balancing Authority to help the Interconnection maintain Scheduled Frequency. This assistance can include both turbine governor response and Automatic Generation Control.
Frequency Response [Archive]		2/8/2005	3/16/2007	(Equipment) The ability of a system or elements of the system to react or respond to a change in system frequency. (System) The sum of the change in demand, plus the change in generation, divided by the change in frequency, expressed in megawatts per 0.1 Hertz (MW/0.1 Hz).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Frequency Response Measure [Archive]	FRM	2/7/2013	1/16/2014 (Becomes effective 4/1/15)	The median of all the Frequency Response observations reported annually by Balancing Authorities or Frequency Response Sharing Groups for frequency events specified by the ERO. This will be calculated as MW/0.1Hz.
Frequency Response Obligation [Archive]	FRO	2/7/2013	1/16/2014 (Becomes effective 4/1/15)	The Balancing Authority's share of the required Frequency Response needed for the reliable operation of an Interconnection. This will be calculated as MW/0.1Hz.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Frequency Response Sharing Group [Archive]	FRSG	2/7/2013	1/16/2014 (Becomes effective 4/1/15)	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating resources required to jointly meet the sum of the Frequency Response Obligations of its members.
Generator Operator [Archive]	GOP	2/8/2005	3/16/2007	The entity that operates generating unit(s) and performs the functions of supplying energy and Interconnected Operations Services.
Generator Owner [Archive]	GO	2/8/2005	3/16/2007	Entity that owns and maintains generating units.
Generator Shift Factor [Archive]	GSF	2/8/2005	3/16/2007	A factor to be applied to a generator’s expected change in output to determine the amount of flow contribution that change in output will impose on an identified transmission facility or Flowgate.
Generator-to-Load Distribution Factor [Archive]	GLDF	2/8/2005	3/16/2007	The algebraic sum of a Generator Shift Factor and a Load Shift Factor to determine the total impact of an Interchange Transaction on an identified transmission facility or Flowgate.
Generation Capability Import Requirement [Archive]	GCIR	11/13/2008	11/24/2009	The amount of generation capability from external sources identified by a Load-Serving Entity (LSE) or Resource Planner (RP) to meet its generation reliability or resource adequacy requirements as an alternative to internal resources.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Host Balancing Authority [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. A Balancing Authority that confirms and implements Interchange Transactions for a Purchasing Selling Entity that operates generation or serves customers directly within the Balancing Authority’s metered boundaries. 2. The Balancing Authority within whose metered boundaries a jointly owned unit is physically located.
Hourly Value [Archive]		2/8/2005	3/16/2007	Data measured on a Clock Hour basis.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Implemented Interchange [Archive]		5/2/2006	3/16/2007	The state where the Balancing Authority enters the Confirmed Interchange into its Area Control Error equation.
Inadvertent Interchange [Archive]		2/8/2005	3/16/2007	The difference between the Balancing Authority's Net Actual Interchange and Net Scheduled Interchange. (I _A - I _S)
Independent Power Producer [Archive]	IPP	2/8/2005	3/16/2007	Any entity that owns or operates an electricity generating facility that is not included in an electric utility's rate base. This term includes, but is not limited to, cogenerators and small power producers and all other nonutility electricity producers, such as exempt wholesale generators, who sell electricity.
Institute of Electrical and Electronics Engineers, Inc. [Archive]	IEEE	2/7/2006	3/16/2007	

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Interactive Remote Access [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/16)	User-initiated access by a person employing a remote access client or other remote access technology using a routable protocol. Remote access originates from a Cyber Asset that is not an Intermediate System and not located within any of the Responsible Entity’s Electronic Security Perimeter(s) or at a defined Electronic Access Point (EAP). Remote access may be initiated from: 1) Cyber Assets used or owned by the Responsible Entity, 2) Cyber Assets used or owned by employees, and 3) Cyber Assets used or owned by vendors, contractors, or consultants. Interactive remote access does not include system-to-system process communications.
Interchange [Archive]		5/2/2006	3/16/2007	Energy transfers that cross Balancing Authority boundaries.
Interchange Authority [Archive]	IA	5/2/2006	3/16/2007	The responsible entity that authorizes implementation of valid and balanced Interchange Schedules between Balancing Authority Areas, and ensures communication of Interchange information for reliability assessment purposes.
Interchange Distribution Calculator [Archive]	IDC	2/8/2005	3/16/2007	The mechanism used by Reliability Coordinators in the Eastern Interconnection to calculate the distribution of Interchange Transactions over specific Flowgates. It includes a database of all Interchange Transactions and a matrix of the Distribution Factors for the Eastern Interconnection.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Interchange Schedule [Archive]		2/8/2005	3/16/2007	An agreed-upon Interchange Transaction size (megawatts), start and end time, beginning and ending ramp times and rate, and type required for delivery and receipt of power and energy between the Source and Sink Balancing Authorities involved in the transaction.
Interchange Transaction [Archive]		2/8/2005	3/16/2007	An agreement to transfer energy from a seller to a buyer that crosses one or more Balancing Authority Area boundaries.
Interchange Transaction Tag or Tag [Archive]		2/8/2005	3/16/2007	The details of an Interchange Transaction required for its physical implementation.
Interconnected Operations Service [Archive]		2/8/2005	3/16/2007	A service (exclusive of basic energy and transmission services) that is required to support the reliable operation of interconnected Bulk Electric Systems.
Interconnection [Archive]		2/8/2005	3/16/2007	When capitalized, any one of the three major electric system networks in North America: Eastern, Western, and ERCOT.
Interconnection [Archive]		8/15/2013		When capitalized, any one of the four major electric system networks in North America: Eastern, Western, ERCOT and Quebec.
Interconnection Reliability Operating Limit [Archive]	IROL	2/8/2005	3/16/2007 Retired 12/27/2007	The value (such as MW, MVar, Amperes, Frequency or Volts) derived from, or a subset of the System Operating Limits, which if exceeded, could expose a widespread area of the Bulk Electric System to instability, uncontrolled separation(s) or cascading outages.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Interconnection Reliability Operating Limit [Archive]	IROL	11/1/2006	12/27/2007	A System Operating Limit that, if violated, could lead to instability, uncontrolled separation, or Cascading outages ⁴ that adversely impact the reliability of the Bulk Electric System.
Interconnection Reliability Operating Limit T _v [Archive]	IROL T _v	11/1/2006	12/27/2007	The maximum time that an Interconnection Reliability Operating Limit can be violated before the risk to the interconnection or other Reliability Coordinator Area(s) becomes greater than acceptable. Each Interconnection Reliability Operating Limit's T _v shall be less than or equal to 30 minutes.
Intermediate Balancing Authority [Archive]		2/8/2005	3/16/2007	A Balancing Authority Area that has connecting facilities in the Scheduling Path between the Sending Balancing Authority Area and Receiving Balancing Authority Area and operating agreements that establish the conditions for the use of such facilities.
Intermediate Balancing Authority [Archive]		2/6/2014		A Balancing Authority on the scheduling path of an Interchange Transaction other than the Source Balancing Authority and Sink Balancing Authority.
Intermediate System [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/16)	A Cyber Asset or collection of Cyber Assets performing access control to restrict Interactive Remote Access to only authorized users. The Intermediate System must not be located inside the Electronic Security Perimeter.

⁴ On September 13, 2012, FERC issued an Order approving NERC's request to modify the reference to "Cascading Outages" to "Cascading outages" within the definition of IROL due to the fact that the definition of "Cascading Outages" was previously remanded by FERC.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Interpersonal Communication [Archive]		11/7/2012		Any medium that allows two or more individuals to interact, consult, or exchange information.
Interruptible Load or Interruptible Demand [Archive]		11/1/2006	3/16/2007	Demand that the end-use customer makes available to its Load-Serving Entity via contract or agreement for curtailment.
Joint Control [Archive]		2/8/2005	3/16/2007	Automatic Generation Control of jointly owned units by two or more Balancing Authorities.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Limiting Element [Archive]		2/8/2005	3/16/2007	The element that is 1.) Either operating at its appropriate rating, or 2,) Would be following the limiting contingency. Thus, the Limiting Element establishes a system limit.
Load [Archive]		2/8/2005	3/16/2007	An end-use device or customer that receives power from the electric system.
Load Shift Factor [Archive]	LSF	2/8/2005	3/16/2007	A factor to be applied to a load’s expected change in demand to determine the amount of flow contribution that change in demand will impose on an identified transmission facility or monitored Flowgate.
Load-Serving Entity [Archive]	LSE	2/8/2005	3/16/2007	Secures energy and transmission service (and related Interconnected Operations Services) to serve the electrical demand and energy requirements of its end-use customers.
Long-Term Transmission Planning Horizon [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/15)	Transmission planning period that covers years six through ten or beyond when required to accommodate any known longer lead time projects that may take longer than ten years to complete.
Market Flow [Archive]		11/4/2010	4/21/2011	The total amount of power flowing across a specified Facility or set of Facilities due to a market dispatch of generation internal to the market to serve load internal to the market.
Minimum Vegetation Clearance Distance [Archive]	MVCD	11/3/2011	3/21/2013 (Becomes effective 7/1/14)	The calculated minimum distance stated in feet (meters) to prevent flash-over between conductors and vegetation, for various altitudes and operating voltages.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Misoperation [Archive]		2/7/2006	3/16/2007	<ul style="list-style-type: none"> Any failure of a Protection System element to operate within the specified time when a fault or abnormal condition occurs within a zone of protection. Any operation for a fault not within a zone of protection (other than operation as backup protection for a fault in an adjacent zone that is not cleared within a specified time for the protection for that zone). Any unintentional Protection System operation when no fault or other abnormal condition has occurred unrelated to on-site maintenance and testing activity.
Native Balancing Area [Archive]		2/6/2014		A Balancing Authority from which a portion of its physically interconnected generation and/or load is transferred from its effective control boundaries to the Attaining Balancing Authority through a Dynamic Transfer.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Native Load [Archive]		2/8/2005	3/16/2007	The end-use customers that the Load-Serving Entity is obligated to serve.
Near-Term Transmission Planning Horizon [Archive]		1/24/2011	11/17/2011	The transmission planning period that covers Year One through five.
Net Actual Interchange [Archive]		2/8/2005	3/16/2007	The algebraic sum of all metered interchange over all interconnections between two physically Adjacent Balancing Authority Areas.
Net Energy for Load [Archive]		2/8/2005	3/16/2007	Net Balancing Authority Area generation, plus energy received from other Balancing Authority Areas, less energy delivered to Balancing Authority Areas through interchange. It includes Balancing Authority Area losses but excludes energy required for storage at energy storage facilities.
Net Interchange Schedule [Archive]		2/8/2005	3/16/2007	The algebraic sum of all Interchange Schedules with each Adjacent Balancing Authority.
Net Scheduled Interchange [Archive]		2/8/2005	3/16/2007	The algebraic sum of all Interchange Schedules across a given path or between Balancing Authorities for a given period or instant in time.
Network Integration Transmission Service [Archive]		2/8/2005	3/16/2007	Service that allows an electric transmission customer to integrate, plan, economically dispatch and regulate its network reserves in a manner comparable to that in which the Transmission Owner serves Native Load customers.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Non-Consequential Load Loss [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/15)	Non-Interruptible Load loss that does not include: (1) Consequential Load Loss, (2) the response of voltage sensitive Load, or (3) Load that is disconnected from the System by end-user equipment.
Non-Firm Transmission Service [Archive]		2/8/2005	3/16/2007	Transmission service that is reserved on an as-available basis and is subject to curtailment or interruption.
Non-Spinning Reserve [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. That generating reserve not connected to the system but capable of serving demand within a specified time. 2. Interruptible load that can be removed from the system in a specified time.
Normal Clearing [Archive]		11/1/2006	12/27/2007	A protection system operates as designed and the fault is cleared in the time normally expected with proper functioning of the installed protection systems.
Normal Rating [Archive]		2/8/2005	3/16/2007	The rating as defined by the equipment owner that specifies the level of electrical loading, usually expressed in megawatts (MW) or other appropriate units that a system, facility, or element can support or withstand through the daily demand cycles without loss of equipment life.
Nuclear Plant Generator Operator [Archive]		5/2/2007	10/16/2008	Any Generator Operator or Generator Owner that is a Nuclear Plant Licensee responsible for operation of a nuclear facility licensed to produce commercial power.
Nuclear Plant Off-site Power Supply (Off-site Power) [Archive]		5/2/2007	10/16/2008	The electric power supply provided from the electric system to the nuclear power plant distribution system as required per the nuclear power plant license.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Nuclear Plant Licensing Requirements [Archive]	NPLRs	5/2/2007	10/16/2008	Requirements included in the design basis of the nuclear plant and statutorily mandated for the operation of the plant, including nuclear power plant licensing requirements for: 1) Off-site power supply to enable safe shutdown of the plant during an electric system or plant event; and 2) Avoiding preventable challenges to nuclear safety as a result of an electric system disturbance, transient, or condition.
Nuclear Plant Interface Requirements [Archive]	NPIRs	5/2/2007	10/16/2008	The requirements based on NPLRs and Bulk Electric System requirements that have been mutually agreed to by the Nuclear Plant Generator Operator and the applicable Transmission Entities.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Off-Peak [Archive]		2/8/2005	3/16/2007	Those hours or other periods defined by NAESB business practices, contract, agreements, or guides as periods of lower electrical demand.
On-Peak [Archive]		2/8/2005	3/16/2007	Those hours or other periods defined by NAESB business practices, contract, agreements, or guides as periods of higher electrical demand.
Open Access Same Time Information Service [Archive]	OASIS	2/8/2005	3/16/2007	An electronic posting system that the Transmission Service Provider maintains for transmission access data and that allows all transmission customers to view the data simultaneously.
Open Access Transmission Tariff [Archive]	OATT	2/8/2005	3/16/2007	Electronic transmission tariff accepted by the U.S. Federal Energy Regulatory Commission requiring the Transmission Service Provider to furnish to all shippers with non-discriminating service comparable to that provided by Transmission Owners to themselves.
Operating Instruction [Archive]		5/6/2014		A command by operating personnel responsible for the Real-time operation of the interconnected Bulk Electric System to change or preserve the state, status, output, or input of an Element of the Bulk Electric System or Facility of the Bulk Electric System. (A discussion of general information and of potential options or alternatives to resolve Bulk Electric System operating concerns is not a command and is not considered an Operating Instruction.)

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Operating Plan [Archive]		2/7/2006	3/16/2007	A document that identifies a group of activities that may be used to achieve some goal. An Operating Plan may contain Operating Procedures and Operating Processes. A company-specific system restoration plan that includes an Operating Procedure for black-starting units, Operating Processes for communicating restoration progress with other entities, etc., is an example of an Operating Plan.
Operating Procedure [Archive]		2/7/2006	3/16/2007	A document that identifies specific steps or tasks that should be taken by one or more specific operating positions to achieve specific operating goal(s). The steps in an Operating Procedure should be followed in the order in which they are presented, and should be performed by the position(s) identified. A document that lists the specific steps for a system operator to take in removing a specific transmission line from service is an example of an Operating Procedure.
Operating Process [Archive]		2/7/2006	3/16/2007	A document that identifies general steps for achieving a generic operating goal. An Operating Process includes steps with options that may be selected depending upon Real-time conditions. A guideline for controlling high voltage is an example of an Operating Process.
Operating Reserve [Archive]		2/8/2005	3/16/2007	That capability above firm system demand required to provide for regulation, load forecasting error, equipment forced and scheduled outages and local area protection. It consists of spinning and non-spinning reserve.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Operating Reserve – Spinning [Archive]		2/8/2005	3/16/2007	The portion of Operating Reserve consisting of: <ul style="list-style-type: none"> • Generation synchronized to the system and fully available to serve load within the Disturbance Recovery Period following the contingency event; or • Load fully removable from the system within the Disturbance Recovery Period following the contingency event.
Operating Reserve – Supplemental [Archive]		2/8/2005	3/16/2007	The portion of Operating Reserve consisting of: <ul style="list-style-type: none"> • Generation (synchronized or capable of being synchronized to the system) that is fully available to serve load within the Disturbance Recovery Period following the contingency event; or • Load fully removable from the system within the Disturbance Recovery Period following the contingency event.
Operating Voltage [Archive]		2/7/2006	3/16/2007	The voltage level by which an electrical system is designated and to which certain operating characteristics of the system are related; also, the effective (root-mean-square) potential difference between any two conductors or between a conductor and the ground. The actual voltage of the circuit may vary somewhat above or below this value.
Operational Planning Analysis [Archive]		10/17/2008	3/17/2011	An analysis of the expected system conditions for the next day’s operation. (That analysis may be performed either a day ahead or as much as 12 months ahead.) Expected system conditions include things such as load forecast(s), generation output levels, and known system constraints (transmission facility outages, generator outages, equipment limitations, etc.).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Operational Planning Analysis [Archive]		2/6/2014		An analysis of the expected system conditions for the next day's operation. (That analysis may be performed either a day ahead or as much as 12 months ahead.) Expected system conditions include things such as load forecast(s), generation output levels, Interchange, and known system constraints (transmission facility outages, generator outages, equipment limitations, etc.).
Operations Support Personnel [Archive]		2/6/2014		Individuals who perform current day or next day outage coordination or assessments, or who determine SOLs, IROLs, or operating nomograms, ¹ in direct support of Real-time operations of the Bulk Electric System.
Outage Transfer Distribution Factor [Archive]	OTDF	8/22/2008	11/24/2009	In the post-contingency configuration of a system under study, the electric Power Transfer Distribution Factor (PTDF) with one or more system Facilities removed from service (outaged).
Overlap Regulation Service [Archive]		2/8/2005	3/16/2007	A method of providing regulation service in which the Balancing Authority providing the regulation service incorporates another Balancing Authority's actual interchange, frequency response, and schedules into providing Balancing Authority's AGC/ACE equation.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Participation Factors [Archive]		8/22/2008	11/24/2009	A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, generators are assigned a percentage that they will contribute to serve load.
Peak Demand [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. The highest hourly integrated Net Energy For Load within a Balancing Authority Area occurring within a given period (e.g., day, month, season, or year). 2. The highest instantaneous demand within the Balancing Authority Area.
Performance-Reset Period [Archive]		2/7/2006	3/16/2007	The time period that the entity being assessed must operate without any violations to reset the level of non compliance to zero.
Physical Access Control Systems [Archive]	PACS	11/26/12	11/22/2013 (Becomes effective 4/1/16)	Cyber Assets that control, alert, or log access to the Physical Security Perimeter(s), exclusive of locally mounted hardware or devices at the Physical Security Perimeter such as motion sensors, electronic lock control mechanisms, and badge readers.
Physical Security Perimeter [Archive]	PSP	5/2/2006	1/18/2008 (Becomes inactive 3/31/16)	The physical, completely enclosed (“six-wall”) border surrounding computer rooms, telecommunications rooms, operations centers, and other locations in which Critical Cyber Assets are housed and for which access is controlled.
Physical Security Perimeter [Archive]	PSP	11/26/12	11/22/2013 (Becomes effective 4/1/16)	The physical border surrounding locations in which BES Cyber Assets, BES Cyber Systems, or Electronic Access Control or Monitoring Systems reside, and for which access is controlled.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Planning Assessment [Archive]		8/4/2011	10/17/2013 (Becomes effective 1/1/15)	Documented evaluation of future Transmission System performance and Corrective Action Plans to remedy identified deficiencies.
Planning Authority [Archive]	PA	2/8/2005	3/16/2007	The responsible entity that coordinates and integrates transmission facility and service plans, resource plans, and protection systems.
Planning Coordinator [Archive]	PC	8/22/2008	11/24/2009	See Planning Authority.
Point of Delivery [Archive]	POD	2/8/2005	3/16/2007	A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction leaves or a Load-Serving Entity receives its energy.
Point of Receipt [Archive]	POR	2/8/2005	3/16/2007	A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction enters or a Generator delivers its output.
Point to Point Transmission Service [Archive]	PTP	2/8/2005	3/16/2007	The reservation and transmission of capacity and energy on either a firm or non-firm basis from the Point(s) of Receipt to the Point(s) of Delivery.
Postback [Archive]		08/22/2008	Not approved; Modification directed 11/24/09	Positive adjustments to ATC or AFC as defined in Business Practices. Such Business Practices may include processing of redirects and unscheduled service.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Power Transfer Distribution Factor [Archive]	PTDF	08/22/2008	11/24/2009	In the pre-contingency configuration of a system under study, a measure of the responsiveness or change in electrical loadings on transmission system Facilities due to a change in electric power transfer from one area to another, expressed in percent (up to 100%) of the change in power transfer
Pro Forma Tariff [Archive]		2/8/2005	3/16/2007	Usually refers to the standard OATT and/or associated transmission rights mandated by the U.S. Federal Energy Regulatory Commission Order No. 888.
Protected Cyber Assets [Archive]	PCA	11/26/12	11/22/2013 (Becomes effective 4/1/16)	One or more Cyber Assets connected using a routable protocol within or on an Electronic Security Perimeter that is not part of the highest impact BES Cyber System within the same Electronic Security Perimeter. The impact rating of Protected Cyber Assets is equal to the highest rated BES Cyber System in the same ESP. A Cyber Asset is not a Protected Cyber Asset if, for 30 consecutive calendar days or less, it is connected either to a Cyber Asset within the ESP or to the network within the ESP, and it is used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.
Protection System [Archive]		2/7/2006	3/17/2007 retired 4/1/2013	Protective relays, associated communication systems, voltage and current sensing devices, station batteries and DC control circuitry.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Protection System [Archive] [Implementation Plan]		11/19/2010	2/3/2012 (Became effective on 4/1/13)	Protection System – <ul style="list-style-type: none"> • Protective relays which respond to electrical quantities, • Communications systems necessary for correct operation of protective functions • Voltage and current sensing devices providing inputs to protective relays, • Station dc supply associated with protective functions (including batteries, battery chargers, and non-battery-based dc supply), and • Control circuitry associated with protective functions through the trip coil(s) of the circuit breakers or other interrupting devices.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Protection System Maintenance Program [Archive]	PSMP	11/7/2012	12/19/2013 (Becomes effective 4/1/2015)	An ongoing program by which Protection System components are kept in working order and proper operation of malfunctioning components is restored. A maintenance program for a specific component includes one or more of the following activities: Verify — Determine that the component is functioning correctly. Monitor — Observe the routine in-service operation of the component. Test — Apply signals to a component to observe functional performance or output behavior, or to diagnose problems. Inspect — Examine for signs of component failure, reduced performance or degradation. Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Protection System Maintenance Program [Archive]	PSMP	11/7/2013		An ongoing program by which Protection System and automatic reclosing components are kept in working order and proper operation of malfunctioning components is restored. A maintenance program for a specific component includes one or more of the following activities: Verify — Determine that the component is functioning correctly. Monitor — Observe the routine in-service operation of the component. Test — Apply signals to a component to observe functional performance or output behavior, or to diagnose problems. Inspect — Examine for signs of component failure, reduced performance or degradation. Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.
Pseudo-Tie [Archive]		2/8/2005	3/16/2007	A telemetered reading or value that is updated in real time and used as a “virtual” tie line flow in the AGC/ACE equation but for which no physical tie or energy metering actually exists. The integrated value is used as a metered MWh value for interchange accounting purposes.
Pseudo-Tie [Archive]		2/6/2014		A time-varying energy transfer that is updated in Real-time and included in the Actual Net Interchange term (NIA) in the same manner as a Tie Line in the affected Balancing Authorities’ control ACE equations (or alternate control processes).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Purchasing-Selling Entity [Archive]	PSE	2/8/2005	3/16/2007	The entity that purchases or sells, and takes title to, energy, capacity, and Interconnected Operations Services. Purchasing-Selling Entities may be affiliated or unaffiliated merchants and may or may not own generating facilities.
Ramp Rate or Ramp [Archive]		2/8/2005	3/16/2007	(Schedule) The rate, expressed in megawatts per minute, at which the interchange schedule is attained during the ramp period. (Generator) The rate, expressed in megawatts per minute, that a generator changes its output.
Rated Electrical Operating Conditions [Archive]		2/7/2006	3/16/2007	The specified or reasonably anticipated conditions under which the electrical system or an individual electrical circuit is intend/designed to operate
Rating [Archive]		2/8/2005	3/16/2007	The operational limits of a transmission system element under a set of specified conditions.
Rated System Path Methodology [Archive]		08/22/2008	11/24/2009	The Rated System Path Methodology is characterized by an initial Total Transfer Capability (TTC), determined via simulation. Capacity Benefit Margin, Transmission Reliability Margin, and Existing Transmission Commitments are subtracted from TTC, and Postbacks and counterflows are added as applicable, to derive Available Transfer Capability. Under the Rated System Path Methodology, TTC results are generally reported as specific transmission path capabilities.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reactive Power [Archive]		2/8/2005	3/16/2007	The portion of electricity that establishes and sustains the electric and magnetic fields of alternating-current equipment. Reactive power must be supplied to most types of magnetic equipment, such as motors and transformers. It also must supply the reactive losses on transmission facilities. Reactive power is provided by generators, synchronous condensers, or electrostatic equipment such as capacitors and directly influences electric system voltage. It is usually expressed in kilovars (kvar) or megavars (Mvar).
Real Power [Archive]		2/8/2005	3/16/2007	The portion of electricity that supplies energy to the load.
Reallocation [Archive]		2/8/2005	3/16/2007	The total or partial curtailment of Transactions during TLR Level 3a or 5a to allow Transactions using higher priority to be implemented.
Real-time [Archive]		2/7/2006	3/16/2007	Present time as opposed to future time. (From Interconnection Reliability Operating Limits standard.)
Real-time Assessment [Archive]		10/17/2008	3/17/2011	An examination of existing and expected system conditions, conducted by collecting and reviewing immediately available data
Receiving Balancing Authority [Archive]		2/8/2005	3/16/2007	The Balancing Authority importing the Interchange.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Regional Reliability Organization [Archive]	RRO	2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. An entity that ensures that a defined area of the Bulk Electric System is reliable, adequate and secure. 2. A member of the North American Electric Reliability Council. The Regional Reliability Organization can serve as the Compliance Monitor.
Regional Reliability Plan [Archive]		2/8/2005	3/16/2007	The plan that specifies the Reliability Coordinators and Balancing Authorities within the Regional Reliability Organization, and explains how reliability coordination will be accomplished.
Regulating Reserve [Archive]		2/8/2005	3/16/2007	An amount of reserve responsive to Automatic Generation Control, which is sufficient to provide normal regulating margin.
Regulation Reserve Sharing Group [Archive]		8/15/2013		A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply the Regulating Reserve required for all member Balancing Authorities to use in meeting applicable regulating standards.
Regulation Service [Archive]		2/8/2005	3/16/2007	The process whereby one Balancing Authority contracts to provide corrective response to all or a portion of the ACE of another Balancing Authority. The Balancing Authority providing the response assumes the obligation of meeting all applicable control criteria as specified by NERC for itself and the Balancing Authority for which it is providing the Regulation Service.
Reliability Adjustment Arranged Interchange [Archive]		2/6/2014		A request to modify a Confirmed Interchange or Implemented Interchange for reliability purposes.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reliability Adjustment RFI [Archive]		10/29/2008	12/17/2009	Request to modify an Implemented Interchange Schedule for reliability purposes.
Reliability Coordinator [Archive]	RC	2/8/2005	3/16/2007	The entity that is the highest level of authority who is responsible for the reliable operation of the Bulk Electric System, has the Wide Area view of the Bulk Electric System, and has the operating tools, processes and procedures, including the authority to prevent or mitigate emergency operating situations in both next-day analysis and real-time operations. The Reliability Coordinator has the purview that is broad enough to enable the calculation of Interconnection Reliability Operating Limits, which may be based on the operating parameters of transmission systems beyond any Transmission Operator’s vision.
Reliability Coordinator Area [Archive]		2/8/2005	3/16/2007	The collection of generation, transmission, and loads within the boundaries of the Reliability Coordinator. Its boundary coincides with one or more Balancing Authority Areas.
Reliability Coordinator Information System [Archive]	RCIS	2/8/2005	3/16/2007	The system that Reliability Coordinators use to post messages and share operating information in real time.
Reliability Directive [Archive]		8/16/2012		A communication initiated by a Reliability Coordinator, Transmission Operator, or Balancing Authority where action by the recipient is necessary to address an Emergency or Adverse Reliability Impact.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reliability Standard [Archive]		5/9/2013	7/9/2013	A requirement, approved by the United States Federal Energy Regulatory Commission under this Section 215 of the Federal Power Act, or approved or recognized by an applicable governmental authority in other jurisdictions, to provide for reliable operation [Reliable Operation] of the bulk-power system [Bulk-Power System]. The term includes requirements for the operation of existing bulk-power system [Bulk-Power System] facilities, including cybersecurity protection, and the design of planned additions or modifications to such facilities to the extent necessary to provide for reliable operation [Reliable Operation] of the bulk-power system [Bulk-Power System], but the term does not include any requirement to enlarge such facilities or to construct new transmission capacity or generation capacity.
Reliable Operation [Archive]		5/9/2013	7/9/2013	Operating the elements of the bulk-power system [Bulk-Power System] within equipment and electric system thermal, voltage, and stability limits so that instability, uncontrolled separation, or cascading failures of such system will not occur as a result of a sudden disturbance, including a cybersecurity incident, or unanticipated failure of system elements.
Remedial Action Scheme [Archive]	RAS	2/8/2005	3/16/2007	See "Special Protection System"

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reportable Cyber Security Incident [Archive]		11/26/12	11/22/2013 (Becomes effective 4/1/16)	A Cyber Security Incident that has compromised or disrupted one or more reliability tasks of a functional entity.
Reportable Disturbance [Archive]		2/8/2005	3/16/2007	Any event that causes an ACE change greater than or equal to 80% of a Balancing Authority's or reserve sharing group's most severe contingency. The definition of a reportable disturbance is specified by each Regional Reliability Organization. This definition may not be retroactively adjusted in response to observed performance.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reporting ACE [Archive]		8/15/2013		<p>The scan rate values of a Balancing Authority’s Area Control Error (ACE) measured in MW, which includes the difference between the Balancing Authority’s Net Actual Interchange and its Net Scheduled Interchange, plus its Frequency Bias obligation, plus any known meter error. In the Western Interconnection, Reporting ACE includes Automatic Time Error Correction (ATEC).</p> <p>Reporting ACE is calculated as follows:</p> $\text{Reporting ACE} = (\text{NI}_A - \text{NI}_S) - 10B (F_A - F_S) - I_{ME}$ <p>Reporting ACE is calculated in the Western Interconnection as follows:</p> $\text{Reporting ACE} = (\text{NI}_A - \text{NI}_S) - 10B (F_A - F_S) - I_{ME} + I_{ATEC}$ <p>Where:</p> <p>NI_A (Actual Net Interchange) is the algebraic sum of actual megawatt transfers across all Tie Lines and includes Pseudo-Ties. Balancing Authorities directly connected via asynchronous ties to another Interconnection may include or exclude megawatt transfers on those Tie lines in their actual interchange, provided they are implemented in the same manner for Net Interchange Schedule.</p> <p>NI_S (Scheduled Net Interchange) is the algebraic sum of all scheduled megawatt transfers, including Dynamic Schedules, with adjacent Balancing Authorities, and taking into account the effects of schedule ramps. Balancing Authorities directly connected via asynchronous ties to another Interconnection may include or exclude megawatt transfers on those Tie Lines in their scheduled Interchange, provided they are implemented in the same manner for Net</p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reporting ACE (Continued)				<p>Interchange Actual.</p> <p>B (Frequency Bias Setting) is the Frequency Bias Setting (in negative MW/0.1 Hz) for the Balancing Authority.</p> <p>10 is the constant factor that converts the frequency bias setting units to MW/Hz.</p> <p>F_A (Actual Frequency) is the measured frequency in Hz.</p> <p>F_S (Scheduled Frequency) is 60.0 Hz, except during a time correction.</p> <p>I_{ME} (Interchange Meter Error) is the meter error correction factor and represents the difference between the integrated hourly average of the net interchange actual (NIA) and the cumulative hourly net Interchange energy measurement (in megawatt-hours).</p> <p>I_{ATEC} (Automatic Time Error Correction) is the addition of a component to the ACE equation for the Western Interconnection that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error. Automatic Time Error Correction is only applicable in the Western Interconnection.</p> $I_{ATEC} = \frac{PII_{accum}^{on/off\ peak}}{(1-Y)^*H}$ <p>when operating in Automatic Time Error Correction control mode.</p> <p>I_{ATEC} shall be zero when operating in any other AGC mode.</p> <ul style="list-style-type: none"> • Y = B / BS. • H = Number of hours used to payback Primary Inadvertent Interchange energy. The value of H is set to 3. • BS = Frequency Bias for the Interconnection (MW / 0.1 Hz).

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reporting ACE (Continued)				<ul style="list-style-type: none"> • Primary Inadvertent Interchange (PII_{hourly}) is $(1-Y) * (II_{actual} - B * \Delta TE/6)$ • II_{actual} is the hourly Inadvertent Interchange for the last hour. • ΔTE is the hourly change in system Time Error as distributed by the Interconnection Time Monitor. Where: $\Delta TE = TE_{end\ hour} - TE_{begin\ hour} - TD_{adj} - (t) * (TE_{offset})$ • TD_{adj} is the Reliability Coordinator adjustment for differences with Interconnection Time Monitor control center clocks. • t is the number of minutes of Manual Time Error Correction that occurred during the hour. • TE_{offset} is 0.000 or +0.020 or -0.020. • PII_{accum} is the Balancing Authority's accumulated PII_{hourly} in MWh. An On-Peak and Off-Peak accumulation accounting is required. <p>Where:</p> $PII_{accum}^{on/off\ peak} = \text{last period's } PII_{accum}^{on/off\ peak} + PII_{hourly}$ <p>All NERC Interconnections with multiple Balancing Authorities operate using the principles of Tie-line Bias (TLB) Control and require the use of an ACE equation similar to the Reporting ACE defined above. Any modification(s) to this specified Reporting ACE equation that is(are) implemented for all BAs on an Interconnection and is(are) consistent with the following four principles will provide a valid alternative Reporting ACE equation</p>

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reporting ACE (Continued)				consistent with the measures included in this standard. <ol style="list-style-type: none"> 1. All portions of the Interconnection are included in one area or another so that the sum of all area generation, loads and losses is the same as total system generation, load and losses. 2. The algebraic sum of all area Net Interchange Schedules and all Net Interchange actual values is equal to zero at all times. 3. The use of a common Scheduled Frequency FS for all areas at all times. 4. The absence of metering or computational errors. (The inclusion and use of the IME term to account for known metering or computational errors.)
Request for Interchange [Archive]	RFI	5/2/2006	3/16/2007	A collection of data as defined in the NAESB RFI Datasheet, to be submitted to the Interchange Authority for the purpose of implementing bilateral Interchange between a Source and Sink Balancing Authority.
Request for Interchange [Archive]	RFI	2/6/2014		A collection of data as defined in the NAESB Business Practice Standards submitted for the purpose of implementing bilateral Interchange between Balancing Authorities or an energy transfer within a single Balancing Authority.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Reserve Sharing Group [Archive]	RSG	2/8/2005	3/16/2007	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating reserves required for each Balancing Authority's use in recovering from contingencies within the group. Scheduling energy from an Adjacent Balancing Authority to aid recovery need not constitute reserve sharing provided the transaction is ramped in over a period the supplying party could reasonably be expected to load generation in (e.g., ten minutes). If the transaction is ramped in quicker (e.g., between zero and ten minutes) then, for the purposes of Disturbance Control Performance, the Areas become a Reserve Sharing Group.
Reserve Sharing Group Reporting ACE [Archive]		8/15/2013		At any given time of measurement for the applicable Reserve Sharing Group, the algebraic sum of the Reporting ACEs (or equivalent as calculated at such time of measurement) of the Balancing Authorities participating in the Reserve Sharing Group at the time of measurement.
Resource Planner [Archive]	RP	2/8/2005	3/16/2007	The entity that develops a long-term (generally one year and beyond) plan for the resource adequacy of specific loads (customer demand and energy requirements) within a Planning Authority Area.
Response Rate [Archive]		2/8/2005	3/16/2007	The Ramp Rate that a generating unit can achieve under normal operating conditions expressed in megawatts per minute (MW/Min).
Right-of-Way [Archive]	ROW	2/7/2006	3/16/2007	A corridor of land on which electric lines may be located. The Transmission Owner may own the land in fee, own an easement, or have certain franchise, prescription, or license rights to construct and maintain lines.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Right-of-Way [Archive]	ROW	11/3/2011	3/21/2013 (Becomes inactive 6/30/14)	The corridor of land under a transmission line(s) needed to operate the line(s). The width of the corridor is established by engineering or construction standards as documented in either construction documents, pre-2007 vegetation maintenance records, or by the blowout standard in effect when the line was built. The ROW width in no case exceeds the Transmission Owner’s legal rights but may be less based on the aforementioned criteria.
Right-of-Way [Archive]	ROW	5/9/12	(Becomes effective 7/1/14)	The corridor of land under a transmission line(s) needed to operate the line(s). The width of the corridor is established by engineering or construction standards as documented in either construction documents, pre-2007 vegetation maintenance records, or by the blowout standard in effect when the line was built. The ROW width in no case exceeds the applicable Transmission Owner’s or applicable Generator Owner’s legal rights but may be less based on the aforementioned criteria.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Scenario [Archive]		2/7/2006	3/16/2007	Possible event.
Schedule [Archive]		2/8/2005	3/16/2007	(Verb) To set up a plan or arrangement for an Interchange Transaction. (Noun) An Interchange Schedule.
Scheduled Frequency [Archive]		2/8/2005	3/16/2007	60.0 Hertz, except during a time correction.
Scheduling Entity [Archive]		2/8/2005	3/16/2007	An entity responsible for approving and implementing Interchange Schedules.
Scheduling Path [Archive]		2/8/2005	3/16/2007	The Transmission Service arrangements reserved by the Purchasing-Selling Entity for a Transaction.
Sending Balancing Authority [Archive]		2/8/2005	3/16/2007	The Balancing Authority exporting the Interchange.
Sink Balancing Authority [Archive]		2/8/2005	3/16/2007	The Balancing Authority in which the load (sink) is located for an Interchange Transaction. (This will also be a Receiving Balancing Authority for the resulting Interchange Schedule.)
Sink Balancing Authority [Archive]		2/6/2014		The Balancing Authority in which the load (sink) is located for an Interchange Transaction and any resulting Interchange Schedule.
Source Balancing Authority [Archive]		2/8/2005	3/16/2007	The Balancing Authority in which the generation (source) is located for an Interchange Transaction. (This will also be a Sending Balancing Authority for the resulting Interchange Schedule.)

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Source Balancing Authority [Archive]		2/6/2014		The Balancing Authority in which the generation (source) is located for an Interchange Transaction and for any resulting Interchange Schedule.
Special Protection System (Remedial Action Scheme) [Archive]	SPS	2/8/2005	3/16/2007	An automatic protection system designed to detect abnormal or predetermined system conditions, and take corrective actions other than and/or in addition to the isolation of faulted components to maintain system reliability. Such action may include changes in demand, generation (MW and Mvar), or system configuration to maintain system stability, acceptable voltage, or power flows. An SPS does not include (a) underfrequency or undervoltage load shedding or (b) fault conditions that must be isolated or (c) out-of-step relaying (not designed as an integral part of an SPS). Also called Remedial Action Scheme.
Spinning Reserve [Archive]		2/8/2005	3/16/2007	Unloaded generation that is synchronized and ready to serve additional demand.
Stability [Archive]		2/8/2005	3/16/2007	The ability of an electric system to maintain a state of equilibrium during normal and abnormal conditions or disturbances.
Stability Limit [Archive]		2/8/2005	3/16/2007	The maximum power flow possible through some particular point in the system while maintaining stability in the entire system or the part of the system to which the stability limit refers.
Supervisory Control and Data Acquisition [Archive]	SCADA	2/8/2005	3/16/2007	A system of remote control and telemetry used to monitor and control the transmission system.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Supplemental Regulation Service [Archive]		2/8/2005	3/16/2007	A method of providing regulation service in which the Balancing Authority providing the regulation service receives a signal representing all or a portion of the other Balancing Authority's ACE.
Surge [Archive]		2/8/2005	3/16/2007	A transient variation of current, voltage, or power flow in an electric circuit or across an electric system.
Sustained Outage [Archive]		2/7/2006	3/16/2007	The deenergized condition of a transmission line resulting from a fault or disturbance following an unsuccessful automatic reclosing sequence and/or unsuccessful manual reclosing procedure.
System [Archive]		2/8/2005	3/16/2007	A combination of generation, transmission, and distribution components.
System Operating Limit [Archive]	SOL	2/8/2005	3/16/2007	The value (such as MW, MVar, Amperes, Frequency or Volts) that satisfies the most limiting of the prescribed operating criteria for a specified system configuration to ensure operation within acceptable reliability criteria. System Operating Limits are based upon certain operating criteria. These include, but are not limited to: <ul style="list-style-type: none"> • Facility Ratings (Applicable pre- and post-Contingency equipment or facility ratings) • Transient Stability Ratings (Applicable pre- and post-Contingency Stability Limits) • Voltage Stability Ratings (Applicable pre- and post-Contingency Voltage Stability) • System Voltage Limits (Applicable pre- and post-Contingency Voltage Limits)

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
System Operator [Archive]		2/8/2005	3/16/2007	An individual at a control center (Balancing Authority, Transmission Operator, Generator Operator, Reliability Coordinator) whose responsibility it is to monitor and control that electric system in real time.
System Operator [Archive]		2/6/2014		An individual at a control center of a Balancing Authority, Transmission Operator, or Reliability Coordinator, who operates or directs the operation of the Bulk Electric System (BES) in Real-time.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
System Operator [Archive]		2/6/2014		An individual at a Control Center of a Balancing Authority, Transmission Operator, or Reliability Coordinator, who operates or directs the operation of the Bulk Electric System (BES) in Real-time.
Telemetry [Archive]		2/8/2005	3/16/2007	The process by which measurable electrical quantities from substations and generating stations are instantaneously transmitted to the control center, and by which operating commands from the control center are transmitted to the substations and generating stations.
Thermal Rating [Archive]		2/8/2005	3/16/2007	The maximum amount of electrical current that a transmission line or electrical facility can conduct over a specified time period before it sustains permanent damage by overheating or before it sags to the point that it violates public safety requirements.
Tie Line [Archive]		2/8/2005	3/16/2007	A circuit connecting two Balancing Authority Areas.
Tie Line Bias [Archive]		2/8/2005	3/16/2007	A mode of Automatic Generation Control that allows the Balancing Authority to 1.) maintain its Interchange Schedule and 2.) respond to Interconnection frequency error.
Time Error [Archive]		2/8/2005	3/16/2007	The difference between the Interconnection time measured at the Balancing Authority(ies) and the time specified by the National Institute of Standards and Technology. Time error is caused by the accumulation of Frequency Error over a given period.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Time Error Correction [Archive]		2/8/2005	3/16/2007	An offset to the Interconnection’s scheduled frequency to return the Interconnection’s Time Error to a predetermined value.
TLR (Transmission Loading Relief) ⁵ Log [Archive]		2/8/2005	3/16/2007	Report required to be filed after every TLR Level 2 or higher in a specified format. The NERC IDC prepares the report for review by the issuing Reliability Coordinator. After approval by the issuing Reliability Coordinator, the report is electronically filed in a public area of the NERC Web site.
Total Flowgate Capability [Archive]	TFC	08/22/2008	11/24/2009	The maximum flow capability on a Flowgate, is not to exceed its thermal rating, or in the case of a flowgate used to represent a specific operating constraint (such as a voltage or stability limit), is not to exceed the associated System Operating Limit.
Total Internal Demand [Archive]		5/6/2014		The Demand of a metered system, which includes the Firm Demand, plus any controllable and dispatchable DSM Load and the Load due to the energy losses incurred within the boundary of the metered system.
Total Transfer Capability [Archive]	TTC	2/8/2005	3/16/2007	The amount of electric power that can be moved or transferred reliably from one area to another area of the interconnected transmission systems by way of all transmission lines (or paths) between those areas under specified system conditions.
Transaction [Archive]		2/8/2005	3/16/2007	See Interchange Transaction.

⁵ NERC added the spelled out term for TLR Log for clarification purposes.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Transfer Capability [Archive]		2/8/2005	3/16/2007	The measure of the ability of interconnected electric systems to move or transfer power <i>in a reliable manner</i> from one area to another over all transmission lines (or paths) between those areas under specified system conditions. The units of transfer capability are in terms of electric power, generally expressed in megawatts (MW). The transfer capability from "Area A" to "Area B" is <i>not</i> generally equal to the transfer capability from "Area B" to "Area A."
Transfer Distribution Factor [Archive]		2/8/2005	3/16/2007	See Distribution Factor.
Transmission [Archive]		2/8/2005	3/16/2007	An interconnected group of lines and associated equipment for the movement or transfer of electric energy between points of supply and points at which it is transformed for delivery to customers or is delivered to other electric systems.
Transmission Constraint [Archive]		2/8/2005	3/16/2007	A limitation on one or more transmission elements that may be reached during normal or contingency system operations.
Transmission Customer [Archive]		2/8/2005	3/16/2007	<ol style="list-style-type: none"> 1. Any eligible customer (or its designated agent) that can or does execute a transmission service agreement or can or does receive transmission service. 2. Any of the following responsible entities: Generator Owner, Load-Serving Entity, or Purchasing-Selling Entity.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Transmission Line [Archive]		2/7/2006	3/16/2007	A system of structures, wires, insulators and associated hardware that carry electric energy from one point to another in an electric power system. Lines are operated at relatively high voltages varying from 69 kV up to 765 kV, and are capable of transmitting large quantities of electricity over long distances.
Transmission Operator [Archive]	TOP	2/8/2005	3/16/2007	The entity responsible for the reliability of its "local" transmission system, and that operates or directs the operations of the transmission facilities.
Transmission Operator Area [Archive]		08/22/2008	11/24/2009	The collection of Transmission assets over which the Transmission Operator is responsible for operating.
Transmission Owner [Archive]	TO	2/8/2005	3/16/2007	The entity that owns and maintains transmission facilities.
Transmission Planner [Archive]	TP	2/8/2005	3/16/2007	The entity that develops a long-term (generally one year and beyond) plan for the reliability (adequacy) of the interconnected bulk electric transmission systems within its portion of the Planning Authority Area.
Transmission Reliability Margin [Archive]	TRM	2/8/2005	3/16/2007	The amount of transmission transfer capability necessary to provide reasonable assurance that the interconnected transmission network will be secure. TRM accounts for the inherent uncertainty in system conditions and the need for operating flexibility to ensure reliable system operation as system conditions change.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Transmission Reliability Margin Implementation Document [Archive]	TRMID	08/22/2008	11/24/2009	A document that describes the implementation of a Transmission Reliability Margin methodology, and provides information related to a Transmission Operator’s calculation of TRM.
Transmission Service [Archive]		2/8/2005	3/16/2007	Services provided to the Transmission Customer by the Transmission Service Provider to move energy from a Point of Receipt to a Point of Delivery.
Transmission Service Provider [Archive]	TSP	2/8/2005	3/16/2007	The entity that administers the transmission tariff and provides Transmission Service to Transmission Customers under applicable transmission service agreements.
Vegetation [Archive]		2/7/2006	3/16/2007	All plant material, growing or not, living or dead.
Vegetation Inspection [Archive]		2/7/2006	3/16/2007	The systematic examination of a transmission corridor to document vegetation conditions.
Vegetation Inspection [Archive]		11/3/2011	3/21/2013 (Becomes inactive 6/30/14)	The systematic examination of vegetation conditions on a Right-of-Way and those vegetation conditions under the Transmission Owner’s control that are likely to pose a hazard to the line(s) prior to the next planned maintenance or inspection. This may be combined with a general line inspection.
Vegetation Inspection [Archive]		5/9/12	(Becomes effective 7/1/14)	The systematic examination of vegetation conditions on a Right-of-Way and those vegetation conditions under the applicable Transmission Owner’s or applicable Generator Owner’s control that are likely to pose a hazard to the line(s) prior to the next planned maintenance or inspection. This may be combined with a general line inspection.

Continent-wide Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Wide Area [Archive]		2/8/2005	3/16/2007	The entire Reliability Coordinator Area as well as the critical flow and status information from adjacent Reliability Coordinator Areas as determined by detailed system studies to allow the calculation of Interconnected Reliability Operating Limits.
Year One [Archive]		1/24/2011	11/17/2011	The first twelve month period that a Planning Coordinator or a Transmission Planner is responsible for assessing. For an assessment started in a given calendar year, Year One includes the forecasted peak Load period for one of the following two calendar years. For example, if a Planning Assessment was started in 2011, then Year One includes the forecasted peak Load period for either 2012 or 2013.

ERCOT Regional Definitions

The following terms were developed as regional definitions for the ERCOT region:

ERCOT Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Frequency Measurable Event [Archive]	FME	8/15/2013	1/16/2014 (Becomes effective 4/1/14)	An event that results in a Frequency Deviation, identified at the BA's sole discretion, and meeting one of the following conditions: i) a Frequency Deviation that has a pre-perturbation [the 16-second period of time before t(0)] average frequency to post-perturbation [the 32-second period of time starting 20 seconds after t(0)] average frequency absolute deviation greater than 100 mHz (the 100 mHz value may be adjusted by the BA to capture 30 to 40 events per year). Or ii) a cumulative change in generating unit/generating facility, DC tie and/or firm load pre-perturbation megawatt value to post-perturbation megawatt value absolute deviation greater than 550 MW (the 550 MW value may be adjusted by the BA to capture 30 to 40 events per year).
Governor [Archive]		8/15/2013	1/16/2014 (Becomes effective	The electronic, digital or mechanical device that implements Primary Frequency Response of generating units/generating facilities or other system elements.

ERCOT Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
			4/1/14)	
Primary Frequency Response [Archive]	PFR	8/15/2013	1/16/2014 (Becomes effective 4/1/14)	The immediate proportional increase or decrease in real power output provided by generating units/generating facilities and the natural real power dampening response provided by Load in response to system Frequency Deviations. This response is in the direction that stabilizes frequency.

NPCC Regional Definitions

The following definitions were developed for use in NPCC Regional Standards.

NPCC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Current Zero Time [Archive]		11/04/2010	10/20/2011	The time of the final current zero on the last phase to interrupt.
Generating Plant [Archive]		11/04/2010	10/20/2011	One or more generators at a single physical location whereby any single contingency can affect all the generators at that location.

ReliabilityFirst Regional Definitions

The following definitions were developed for use in ReliabilityFirst Regional Standards.

RFC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Resource Adequacy [Archive]		08/05/2009	03/17/2011	The ability of supply-side and demand-side resources to meet the aggregate electrical demand (including losses)
Net Internal Demand [Archive]		08/05/2009	03/17/2011	Total of all end-use customer demand and electric system losses within specified metered boundaries, less Direct Control Management and Interruptible Demand
Peak Period [Archive]		08/05/2009	03/17/2011	A period consisting of two (2) or more calendar months but less than seven (7) calendar months, which includes the period during which the responsible entity's annual peak demand is expected to occur
Wind Generating Station [Archive]		11/03/2011		A collection of wind turbines electrically connected together and injecting energy into the grid at one point, sometimes known as a "Wind Farm."
Year One [Archive]		08/05/2009	03/17/2011	The planning year that begins with the upcoming annual Peak Period

WECC Regional Definitions

The following definitions were developed for use in WECC Regional Standards.

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Area Control Error [†] [Archive]	ACE	3/12/2007	6/8/2007 (Becomes inactive 3/31/14)	Means the instantaneous difference between net actual and scheduled interchange, taking into account the effects of Frequency Bias including correction for meter error.
Automatic Generation Control [‡] [Archive]	AGC	3/12/2007	6/8/2007	Means equipment that automatically adjusts a Control Area's generation from a central location to maintain its interchange schedule plus Frequency Bias.
Automatic Time Error Correction [Archive]		3/26/2008	5/21/2009 (Becomes inactive 3/31/14)	A frequency control automatic action that a Balancing Authority uses to offset its frequency contribution to support the Interconnection's scheduled frequency.
Automatic Time Error Correction [Archive]		12/19/2012	10/16/2013 (Becomes effective 4/1/2014)	The addition of a component to the ACE equation that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error.
Average Generation [‡] [Archive]		3/12/2007	6/8/2007	Means the total MWh generated within the Balancing Authority Operator's Balancing Authority Area during the prior year divided by 8760 hours (8784 hours if the prior year had 366 days).
Business Day [‡] [Archive]		3/12/2007	6/8/2007	Means any day other than Saturday, Sunday, or a legal public holiday as designated in section 6103 of title 5, U.S. Code.

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Commercial Operation [Archive]		10/29/2008	4/21/2011	Achievement of this designation indicates that the Generator Operator or Transmission Operator of the synchronous generator or synchronous condenser has received all approvals necessary for operation after completion of initial start-up testing.
Contributing Schedule [Archive]		2/10/2009	3/17/2011	A Schedule not on the Qualified Transfer Path between a Source Balancing Authority and a Sink Balancing Authority that contributes unscheduled flow across the Qualified Transfer Path.
Dependability-Based Misoperation [Archive]		10/29/2008	4/21/2011	Is the absence of a Protection System or RAS operation when intended. Dependability is a component of reliability and is the measure of a device's certainty to operate when required.
Disturbance [±] [Archive]		3/12/2007	6/8/2007	Means (i) any perturbation to the electric system, or (ii) the unexpected change in ACE that is caused by the sudden loss of generation or interruption of load.

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Extraordinary Contingency [‡] [Archive]		3/12/2007	6/8/2007	Shall have the meaning set out in Excuse of Performance, section B.4.c. language in section B.4.c: <i>means any act of God, actions by a non-affiliated third party, labor disturbance, act of the public enemy, war, insurrection, riot, fire, storm or flood, earthquake, explosion, accident to or breakage, failure or malfunction of machinery or equipment, or any other cause beyond the Reliability Entity's reasonable control; provided that prudent industry standards (e.g. maintenance, design, operation) have been employed; and provided further that no act or cause shall be considered an Extraordinary Contingency if such act or cause results in any contingency contemplated in any WECC Reliability Standard (e.g., the "Most Severe Single Contingency" as defined in the WECC Reliability Criteria or any lesser contingency).</i>
Frequency Bias [‡] [Archive]		3/12/2007	6/8/2007	Means a value, usually given in megawatts per 0.1 Hertz, associated with a Control Area that relates the difference between scheduled and actual frequency to the amount of generation required to correct the difference.
Functionally Equivalent Protection System [Archive]	FEPS	10/29/2008	4/21/2011	A Protection System that provides performance as follows: <ul style="list-style-type: none"> • Each Protection System can detect the same faults within the zone of protection and provide the clearing times and coordination needed to comply with all Reliability Standards. • Each Protection System may have different components and operating characteristics.
Functionally Equivalent RAS [Archive]	FERAS	10/29/2008	4/21/2011	A Remedial Action Scheme ("RAS") that provides the same performance as follows: <ul style="list-style-type: none"> • Each RAS can detect the same conditions and provide

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
				mitigation to comply with all Reliability Standards. <ul style="list-style-type: none"> • Each RAS may have different components and operating characteristics.
Generating Unit Capability [±] [Archive]		3/12/2007	6/8/2007	Means the MVA nameplate rating of a generator.
Non-spinning Reserve [±] [Archive]		3/12/2007	6/8/2007	Means that Operating Reserve not connected to the system but capable of serving demand within a specified time, or interruptible load that can be removed from the system in a specified time.
Normal Path Rating [±] [Archive]		3/12/2007	6/8/2007	Is the maximum path rating in MW that has been demonstrated to WECC through study results or actual operation, whichever is greater. For a path with transfer capability limits that vary seasonally, it is the maximum of all the seasonal values.
Operating Reserve [±] [Archive]		3/12/2007	6/8/2007	Means that capability above firm system demand required to provide for regulation, load-forecasting error, equipment forced and scheduled outages and local area protection. Operating Reserve consists of Spinning Reserve and Nonspinning Reserve.
Operating Transfer Capability Limit [±] [Archive]	OTC	3/12/2007	6/8/2007	Means the maximum value of the most critical system operating parameter(s) which meets: (a) precontingency criteria as determined by equipment loading capability and acceptable voltage conditions, (b) transient criteria as determined by equipment loading capability and acceptable voltage conditions, (c) transient performance criteria, and (d) post-contingency loading and voltage criteria.

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
Primary Inadvertent Interchange [Archive]		3/26/2008	5/21/2009	The component of area (n) inadvertent interchange caused by the regulating deficiencies of the area (n).
Qualified Controllable Device [Archive]		2/10/2009	3/17/2011	A controllable device installed in the Interconnection for controlling energy flow and the WECC Operating Committee has approved using the device for controlling the USF on the Qualified Transfer Paths.
Qualified Transfer Path [Archive]		2/10/2009	3/17/2011	A transfer path designated by the WECC Operating Committee as being qualified for WECC unscheduled flow mitigation.
Qualified Transfer Path Curtailment Event [Archive]		2/10/2009	3/17/2011	Each hour that a Transmission Operator calls for Step 4 or higher for one or more consecutive hours (See Attachment 1 IRO-006-WECC-1) during which the curtailment tool is functional.
Relief Requirement [Archive]		2/10/2009	3/17/2011	The expected amount of the unscheduled flow reduction on the Qualified Transfer Path that would result by curtailing each Sink Balancing Authority's Contributing Schedules by the percentages listed in the columns of WECC Unscheduled Flow Mitigation Summary of Actions Table in Attachment 1 WECC IRO-006-WECC-1.
Secondary Inadvertent Interchange [Archive]		3/26/2008	5/21/2009	The component of area (n) inadvertent interchange caused by the regulating deficiencies of area (i).
Security-Based Misoperation		10/29/2008	4/21/2011	A Misoperation caused by the incorrect operation of a Protection System or RAS. Security is a component of

WECC Regional Term	Acronym	BOT Approved Date	FERC Approved Date	Definition
[Archive]				reliability and is the measure of a device’s certainty not to operate falsely.
Spinning Reserve [†] [Archive]		3/12/2007	6/8/2007	Means unloaded generation which is synchronized and ready to serve additional demand. It consists of Regulating reserve and Contingency reserve (as each are described in Sections B.a.i and ii).
Transfer Distribution Factor [Archive]	TDF	2/10/2009	3/17/2011	The percentage of USF that flows across a Qualified Transfer Path when an Interchange Transaction (Contributing Schedule) is implemented. [See the WECC Unscheduled Flow Mitigation Summary of Actions Table (Attachment 1 WECC IRO-006-WECC-1).]
WECC Table 2 [†] [Archive]		3/12/2007	6/8/2007	Means the table maintained by the WECC identifying those transfer paths monitored by the WECC regional Reliability coordinators. As of the date set out therein, the transmission paths identified in Table 2 are as listed in Attachment A to this Standard.

Endnotes

[†] FERC approved the WECC Tier One Reliability Standards in the Order Approving Regional Reliability Standards for the Western Interconnection and Directing Modifications, 119 FERC ¶ 61,260 (June 8, 2007). In that Order, FERC directed WECC to address the inconsistencies between the regional definitions and the NERC Glossary in developing permanent replacement standards. The replacement standards designed to address the shortcomings were filed with FERC in 2009.

**Exhibit B: Informational Summary of Each Reliability Standard Applicable to Nova Scotia, Approved by
FERC in First Quarter 2014**

**EXHIBIT B: Informational Summary of Reliability Standard Applicable to
Nova Scotia, Approved by FERC in First Quarter 2014**

BAL-003-1- To require sufficient Frequency Response from the Balancing Authority (BA) to maintain Interconnection Frequency within predefined bounds by arresting frequency deviations and supporting frequency until the frequency is restored to its scheduled value. To provide consistent methods for measuring Frequency Response and determining the Frequency Bias Setting.

Applicability:

- Balancing Authorities
- Frequency Response Sharing Groups

Reliability Standard BAL-003-1 includes four requirements and the recirculation ballot achieved a quorum of 86.19% and an approval of 76.53%

On March 29, 2013 NERC submitted a petition for approval of BAL-003-1 to the Federal Energy Regulatory Commission (“FERC”) and on January 16, 2014, FERC approved the standard.

**EXHIBIT B: Informational Summary of Reliability Standard Applicable to
Nova Scotia, Approved by FERC in First Quarter 2014**

MOD-025-2 To ensure that accurate information on generator gross and net Real and Reactive Power capability and synchronous condenser Reactive Power capability is available for planning models used to assess Bulk Electric System (BES) reliability.

Applicability:

- Generator Owners
- Transmission Owners that own synchronous condenser(s)

Reliability Standard MOD-025-2 includes three requirements one diagram and one table. MOD-025-2 received a quorum of 86.89% and an approval rating of 73.06%.

On May 30, 2013, NERC submitted a petition for approval of MOD-025-2 to the Federal Energy Regulatory Commission (“FERC”) and on March 20, 2014, FERC approved the standard.

**EXHIBIT B: Informational Summary of Reliability Standard Applicable to
Nova Scotia, Approved by FERC in First Quarter 2014**

MOD-026-1- To verify that the generator excitation control system or plant volt/var control function model (including the power system stabilizer model and the impedance compensator model) and the model parameters used in dynamic simulations accurately represent the generator excitation control system or plant volt/var control function behavior when assessing Bulk Electric System (BES) reliability.

Applicability:

- Generator Owners
- Transmission Planners

Reliability Standard MOD-026-1 includes six requirements and several tables. MOD-026-1 received a quorum of 79% and an approval rating of 79.36%.

On May 30, 2013, NERC submitted a petition for approval of MOD-026-1 to the Federal Energy Regulatory Commission (“FERC”) and on March 20, 2014, FERC approved the standard.

**EXHIBIT B: Informational Summary of Reliability Standard Applicable to
Nova Scotia, Approved by FERC in First Quarter 2014**

MOD-027-1 To verify that the turbine/governor and load control or active power/frequency control model and the model parameters, used in dynamic simulations that assess Bulk Electric System (BES) reliability, accurately represent generator unit real power response to system frequency variations.

Applicability:

- Generator Owners
- Transmission Planners

Reliability Standard MOD-027-1 includes five requirements and several tables. MOD-027-1 received a quorum of 86.68% and an approval rating of 74.27%.

On May 30, 2013, NERC submitted a petition for approval of MOD-027-1 to the Federal Energy Regulatory Commission (“FERC”) and on March 20, 2014, FERC approved the standard.

**EXHIBIT B: Informational Summary of Reliability Standard Applicable to
Nova Scotia, Approved by FERC in First Quarter 2014**

PRC-019-1 To verify coordination of generating unit Facility or synchronous condenser voltage regulating controls, limit functions, equipment capabilities and Protection System settings.

Applicability:

- Generator Owners
- Transmission Owners that own synchronous condenser(s)

Reliability Standard PRC-019-1 includes two requirements and several diagrams. PRC-019-1 received a quorum of 85.87% and an approval rating of 73.63%.

On May 30, 2013, NERC submitted a petition for approval of PRC-019-1 to the Federal Energy Regulatory Commission (“FERC”) and on March 20, 2014, FERC approved the standard.

**EXHIBIT B: Informational Summary of Reliability Standard Applicable to
Nova Scotia, Approved by FERC in First Quarter 2014**

PRC-024-1- Ensure Generator Owners set their generator protective relays such that generating units remain connected during defined frequency and voltage excursions.

Applicability:

- Generator Owners

Reliability Standard PRC-024-1 includes four requirements and several tables. PRC-024-1 received a quorum of 78.16% and an approval rating of 60.31%.

On May 30, 2013, NERC submitted a petition for approval of PRC-024-1 to the Federal Energy Regulatory Commission (“FERC”) and on March 20, 2014, FERC approved the standard.

Exhibit C: List of Currently Effective NERC Reliability Standards

EXHIBIT C

Resource and Demand Balancing (BAL)

BAL-001-1	Real Power Balancing Control Performance
BAL-001-TRE-1	Primary Frequency Response in the ERCOT Region
BAL-002-1	Disturbance Control Performance
BAL-003-0.1b	Frequency Response and Bias
BAL-004-0	Time Error Correction
BAL-004-WECC-01	Automatic Time Error Correction
BAL-005-0.2b	Automatic Generation Control
BAL-006-2	Inadvertent Interchange
BAL-502-RFC-02	Planning Resource Adequacy Analysis, Assessment and Documentation
BAL-STD-002-0	Operating Reserves (WECC)

Communications (COM)

COM-001-1.1	Telecommunications
COM-002-2	Communications and Coordination

Critical Infrastructure Protection (CIP)

CIP-002-3	Cyber Security — Critical Cyber Asset Identification
CIP-003-3	Cyber Security — Security Management Controls
CIP-004-3a	Cyber Security — Personnel & Training
CIP-005-3a	Cyber Security — Electronic Security Perimeter(s)
CIP-006-3c	Cyber Security — Physical Security of Critical Cyber Assets
CIP-007-3a	Cyber Security — Systems Security Management
CIP-008-3	Cyber Security — Incident Reporting and Response Planning
CIP-009-3	Cyber Security — Recovery Plans for Critical Cyber Assets

Emergency Preparedness and Operations (EOP)

EOP-001-2.1b	Emergency Operations Planning
EOP-002-3.1	Capacity and Energy Emergencies
EOP-003-2	Load Shedding Plans
EOP-004-2	Event Reporting
EOP-005-2	System Restoration from Blackstart Resources
EOP-006-2	System Restoration Coordination
EOP-008-1	Loss of Control Center Functionality

Facilities Design, Connections, and Maintenance (FAC)

FAC-001-1	Facility Connection Requirements
FAC-002-1	Coordination of Plans For New Generation, Transmission, and End-User Facilities
FAC-003-1	Transmission Vegetation Management Program
FAC-008-3	Facility Ratings
FAC-010-2.1	System Operating Limits Methodology for the Planning Horizon
FAC-011-2	System Operating Limits Methodology for the Operations Horizon
FAC-013-2	Assessment of Transfer Capability for the Near-Term Transmission Planning Horizon
FAC-014-2	Establish and Communicate System Operating Limits
FAC-501-WECC-1	Transmission Maintenance

Interchange Scheduling and Coordination (INT)

INT-001-3	Interchange Information
INT-003-3	Interchange Transaction Implementation
INT-004-2	Dynamic Interchange Transaction Modifications
INT-005-3	Interchange Authority Distributes Arranged Interchange
INT-006-3	Response to Interchange Authority
INT-007-1	Interchange Confirmation
INT-008-3	Interchange Authority Distributes Status
INT-009-1	Implementation of Interchange
INT-010-1	Interchange Coordination Exemptions

Interconnection Reliability Operations and Coordination (IRO)

IRO-001-1.1	Reliability Coordination — Responsibilities and Authorities
IRO-002-2	Reliability Coordination — Facilities
IRO-003-2	Reliability Coordination — Wide-Area View
IRO-004-2	Reliability Coordination — Operations Planning
IRO-005-3.1a	Reliability Coordination — Current Day Operations
IRO-006-5	Reliability Coordination — Transmission Loading Relief (TLR)
IRO-006-EAST-1	Transmission Loading Relief Procedure for the Eastern Interconnection
IRO-006-TRE-1	IROL and SOL Mitigation in the ERCOT Region
IRO-006-WECC-1	Qualified Transfer Path Unscheduled Flow (USF) Relief

IRO-008-1	Reliability Coordinator Operational Analyses and Real-time Assessments
IRO-009-1	Reliability Coordinator Actions to Operate Within IROs
IRO-010-1a	Reliability Coordinator Data Specification and Collection
IRO-014-1	Procedures, Processes, or Plans to Support Coordination Between Reliability Coordinators
IRO-015-1	Notifications and Information Exchange Between Reliability Coordinators
IRO-016-1	Coordination of Real-time Activities Between Reliability Coordinators

Modeling, Data, and Analysis (MOD)

MOD-001-1a	Available Transmission System Capability
MOD-004-1	Capacity Benefit Margin
MOD-008-1	Transmission Reliability Margin Calculation Methodology
MOD-010-0	Steady-State Data for Modeling and Simulation of the Interconnected Transmission System
MOD-012-0	Dynamics Data for Modeling and Simulation of the Interconnected Transmission System
MOD-016-1.1	Documentation of Data Reporting Requirements for Actual and Forecast Demands, Net Energy for Load, and Controllable Demand-Side Management
MOD-017-0.1	Aggregated Actual and Forecast Demands and Net Energy for Load
MOD-018-0	Treatment of Nonmember Demand Data and How Uncertainties are Addressed in the Forecasts of Demand and Net Energy for Load
MOD-019-0.1	Reporting of Interruptible Demands and Direct Control Load Management
MOD-020-0	Providing Interruptible Demands and Direct Control Load Management Data to System Operators and Reliability Coordinators
MOD-021-1	Documentation of the Accounting Methodology for the Effects of Demand-Side Management in Demand and Energy Forecasts
MOD-028-2	Area Interchange Methodology
MOD-029-1a	Rated System Path Methodology
MOD-030-2	Flowgate Methodology

Nuclear (NUC)

NUC-001-2.1	Nuclear Plant Interface Coordination
-------------	--

Personnel Performance, Training, and Qualifications (PER)

PER-001-0.2	Operating Personnel Responsibility and Authority
PER-003-1	Operating Personnel Credentials
PER-004-2	Reliability Coordination — Staffing

PER-005-1 [System Personnel Training](#)

Protection and Control (PRC)

PRC-001-1.1 [System Protection Coordination](#)

PRC-002-NPCC-01 [Disturbance Monitoring](#)

PRC-004-2.1a [Analysis and Mitigation of Transmission and Generation Protection System Misoperations](#)

PRC-004-WECC-1 [Protection System and Remedial Action Scheme Misoperation](#)

PRC-005-1.1b [Transmission and Generation Protection System Maintenance and Testing](#)

PRC-006-1 [Automatic Underfrequency Load Shedding](#)

PRC-006-SERC-01 [Automatic Underfrequency Load Shedding Requirements](#)

PRC-008-0 [Implementation and Documentation of Underfrequency Load Shedding Equipment Maintenance Program](#)

PRC-010-0 [Technical Assessment of the Design and Effectiveness of Undervoltage Load Shedding Program](#)

PRC-011-0 [Undervoltage Load Shedding System Maintenance and Testing](#)

PRC-015-0 [Special Protection System Data and Documentation](#)

PRC-016-0.1 [Special Protection System Misoperations](#)

PRC-017-0 [Special Protection System Maintenance and Testing](#)

PRC-018-1 [Disturbance Monitoring Equipment Installation and Data Reporting](#)

PRC-021-1 [Under-Voltage Load Shedding Program Data](#)

PRC-022-1 [Under-Voltage Load Shedding Program Performance](#)

PRC-023-1 [Transmission Relay Loadability](#)

PRC-023-2 [Transmission Relay Loadability](#)

Transmission Operations (TOP)

TOP-001-1a [Reliability Responsibilities and Authorities](#)

TOP-002-2.1b [Normal Operations Planning](#)

TOP-003-1 [Planned Outage Coordination](#)

TOP-004-2 [Transmission Operations](#)

TOP-005-2a [Operational Reliability Information](#)

TOP-006-2 [Monitoring System Conditions](#)

TOP-007-0 [Reporting System Operating Limit \(SOL\) and Interconnection Reliability Operating Limit \(IROL\) Violations](#)

TOP-007-WECC-1 [System Operating Limits](#)

TOP-008-1 [Response to Transmission Limit Violations](#)

Transmission Planning (TPL)

TPL-001-0.1 [System Performance Under Normal \(No Contingency\) Conditions \(Category A\)](#)

TPL-002-0b [System Performance Following Loss of a Single Bulk Electric System Element \(Category B\)](#)

TPL-003-0b [System Performance Following Loss of Two or More Bulk Electric System Elements \(Category C\)](#)

TPL-004-0a [System Performance Following Extreme Events Resulting in the Loss of Two or More Bulk Electric System Elements \(Category D\)](#)

Voltage and Reactive (VAR)

VAR-001-3 [Voltage and Reactive Control](#)

VAR-002-2b [Generator Operation for Maintaining Network Voltage Schedules](#)

VAR-002-WECC-1 [Automatic Voltage Regulators \(AVR\)](#)

VAR-501-WECC-1 [Power System Stabilizer \(PSS\)](#)