



## TABLE OF CONTENTS

I.	NOTICE AND COMMUNICATIONS .....	2
II.	REQUEST FOR APPROVAL OF RELIABILITY STANDARDS.....	2
	A. Background: NERC Quarterly Filing of Proposed Reliability Standards .....	2
	B. Overview of NERC Reliability Standards Development Process .....	4
	C. Description of Proposed Definitions and Reliability Standards .....	5
III.	CONCLUSION.....	7

### **Exhibit A**

**Exhibit A-1** Reliability Standards Applicable to Nova Scotia, Approved by FERC in Fourth Quarter 2016

**Exhibit A-2** Informational Summary of Each Reliability Standard Applicable to Nova Scotia, Approved by FERC in Fourth Quarter 2016

**Exhibit A-3** Reliability Standards Filed for Approval

**Exhibit B** List of Currently-Effective NERC Reliability Standards

**Exhibit C** Updated *Glossary of Terms Used in NERC Reliability Standards*



(Exhibit C).<sup>1</sup>

## I. NOTICE AND COMMUNICATIONS

Notices and communications regarding this application may be addressed to:

Shamai Elstein  
Senior Counsel  
North American Electric Reliability Corporation  
1325 G Street, N.W., Suite 600  
Washington, D.C. 20005  
(202) 400-3000  
(202) 644-8099– facsimile  
shamai.elstein@nerc.net

## II. REQUEST FOR APPROVAL OF RELIABILITY STANDARDS

### A. Background: NERC Quarterly Filing of Proposed Reliability Standards

Pursuant to Section 215 of the Federal Power Act,<sup>2</sup> NERC has been certified by the Commission as the Electric Reliability Organization (“ERO”) in the United States.<sup>3</sup> During the fourth quarter of 2016, the Commission approved the Reliability Standards contained in **Exhibit A** as mandatory and enforceable for users, owners, and operators of the BPS within the United States. Some or all of NERC’s Reliability Standards are also mandatory in the Canadian provinces of Alberta, British Columbia, Manitoba, New Brunswick, Nova Scotia, Ontario, Québec, and Saskatchewan.

---

<sup>1</sup> The list of Reliability Standards and *NERC Glossary* in **Exhibit B** and **Exhibit C** were generated on or around the date of this filing, and, given the quarterly schedule on which this application is filed, these lists may include standards and definitions that became effective or were approved after the final day of the previous quarter. Only those standards and definitions highlighted for NSUARB in the present quarterly application and all previous applications should be considered for purposes of this application.

<sup>2</sup> 16 U.S.C. § 824o(f) (2012) (entrusting FERC with the duties of approving and enforcing rules in the U.S. to ensure the reliability of the Nation’s Bulk-Power System, and with the duties of certifying an Electric Reliability Organization to develop mandatory and enforceable Reliability Standards, subject to FERC review and approval).

<sup>3</sup> FERC certified NERC as the electric reliability organization (“ERO”) authorized by Section 215 of the Federal Power Act, in its order issued on July 20, 2006, in Docket No. RR06-1-000. *See Order Certifying North American Electric Reliability Corporation as the Electric Reliability Organization and Ordering Compliance Filing*, 116 FERC ¶ 61,062 (2006), *order on reh’g and compliance*, 117 FERC ¶ 61,126 (2006), *aff’d sub nom. Alcoa Inc. v. FERC*, 564 F.3d 342 (D.C. Cir. 2009).

NERC entered into a Memorandum of Understanding (“MOU”) with the NSUARB,<sup>4</sup> and a separate MOU with Nova Scotia Power Incorporated (“NSPI”) and the Northeast Power Coordinating Council, Inc. (“NPCC”),<sup>5</sup> to provide reliability services to Nova Scotia. These MOUs became effective on December 22, 2006 and May 11, 2010, respectively. The December 22, 2006 MOU memorializes the relationship between NERC and the NSUARB formed to improve the reliability of the North American BPS. The May 11, 2010 MOU sets forth the mutual understandings of NERC, NSPI, and NPCC regarding the approval and implementation of NERC Reliability Standards and NPCC Regional Reliability Criteria in Nova Scotia and other related matters.

On June 30, 2010, NERC submitted its first set of Reliability Standards and the *NERC Glossary* to the NSUARB, and on July 20, 2011, NSUARB issued a decision approving these documents.<sup>6</sup> In that decision, the NSUARB approved a “quarterly review” process for considering new and amended NERC Reliability Standards and criteria<sup>7</sup> and ordered that “applications will not be processed by the Board until [FERC] has approved or remanded the standards in the United States.”<sup>8</sup> The NSUARB Decision also stated that NSUARB approval is not required for the Violation Risk Factors (“VRFs”) and Violation Severity Levels (“VSLs”) associated with proposed Reliability Standards, but the NSUARB noted that it will accept VRFs and VSLs as guidance.<sup>9</sup>

---

<sup>4</sup> See Memorandum of Understanding between Nova Scotia Utility and Review Board and North American Electric Reliability Corporation (signed Dec. 22, 2006).

<sup>5</sup> See Memorandum of Understanding between Nova Scotia Power Incorporated and the Northeast Power Coordinating Council, Inc. and the North American Electric Reliability Corporation (signed May 11, 2010).

<sup>6</sup> *In the Matter of an Application by North American Electric Reliability Corporation for Approval of its Reliability Standards, and an application by Northeast Power Coordinating Council, Inc. for Approval of its Regional Reliability Criteria*, NSUARB-NERC-R-10 (July 20, 2011) (“NSUARB Decision”).

<sup>7</sup> *Id.* at P 30.

<sup>8</sup> *Id.*

<sup>9</sup> *Id.* at P 33.

Based on the NSUARB Decision, NERC applications to the NSUARB only request approval for those Reliability Standards and Glossary definitions approved by FERC during the previous quarter. NERC does not seek formal approval of VRFs and VSLs associated with the Reliability Standards submitted in its quarterly applications. Rather, for informational purposes and for guidance, NERC provides a link below to the FERC-approved VRFs and VSLs associated with NERC Reliability Standards.<sup>10</sup> NERC does not include in its applications the full developmental record for the standards, which consists of the draft standards, comments received, responses to the comments by the drafting teams, and the full voting record, because the record for each standard may consist of several thousand pages. NERC will make the full developmental records available to the NSUARB or other interested parties upon request.

## **B. Overview of NERC Reliability Standards Development Process**

NERC Reliability Standards define the requirements for reliably planning and operating the North American BPS. These standards are developed by industry stakeholders using a balanced, open, fair, and inclusive process managed by the NERC Standards Committee. The Standards Committee is facilitated by NERC staff and comprised of representatives from ten electricity stakeholder segments. Stakeholders, through the balloting process, have approved the Reliability Standards provided in **Exhibit A**, and the standards have been adopted by the NERC Board of Trustees.

NERC develops Reliability Standards and associated definitions in accordance with Section 300 (Reliability Standards Development) and Appendix 3A (Standards Processes

---

<sup>10</sup> NERC's VRF Matrix and VSL Matrix are available at: <http://www.nerc.com/pa/Stand/Pages/AllReliabilityStandards.aspx?jurisdiction=United States>. See left-hand side of webpage for downloadable documents.

Manual) of its Rules of Procedure.<sup>11</sup> NERC’s Reliability Standards development process has been approved by the American National Standards Institute as being open, inclusive, balanced, and fair. The *NERC Glossary*, most recently updated December 12, 2016, contains each term that is defined for use in one or more of NERC’s continent-wide or regional Reliability Standards approved by the NERC Board of Trustees. NERC submits the *NERC Glossary* as **Exhibit C** of this application for informational purposes.

**C. Description of Proposed Definitions and Reliability Standards, Fourth Quarter 2016**

As explained below, the following two FERC orders were issued in the fourth quarter of 2016 approving modifications to a NERC Reliability Standard and an interpretation of a NERC Reliability Standard: (1) a delegated letter order approving Reliability Standard COM-001-3, issued on October 28, 2016;<sup>12</sup> and (2) a delegated letter order approving an interpretation to Reliability Standard CIP-002-5.1a, issued on December 27, 2016.<sup>13</sup> None of the standards include newly defined or revised terms.<sup>14</sup>

<b>Reliability Standard</b>	<b>Effective Date</b>
Critical Infrastructure Protection (CIP) Standard	
CIP-002-5.1a	12/27/2016
Communications (COM) Standard	
COM-001-3*	10/1/2017

\* At the time of this filing, all standards marked with an asterisk are not yet effective, but have been approved by FERC and have a future mandatory effective date.

<sup>11</sup> The NERC *Rules of Procedure* are available at: <http://www.nerc.com/AboutNERC/Pages/Rules-of-Procedure.aspx>.

<sup>12</sup> *North American Electric Reliability Corporation Reliability Corp.*, Docket No. RD16-9-000 (Oct. 28, 2016) (unpublished letter order).

<sup>13</sup> *North American Electric Reliability Corporation Reliability Corp.*, Docket No. RD17-2-000 (Dec. 27, 2016) (unpublished letter order).

<sup>14</sup> During the fourth quarter of 2016, FERC also issued an a delegated letter order approving revisions to VRFs for Reliability Standards IRO-018-1 and TOP-010-1 in FERC Docket No. RD16-6. This filing is available for viewing on NERC’s website at <http://www.nerc.com/FilingsOrders/us/Pages/2016FERCOrdersRules.aspx>. NERC has not included these changes in this filing since the changes are reflected in NERC’s VRF and VSL matrices that are cross-referenced herein.

1. COM-001-3

On October 28, 2016, FERC approved Reliability Standard COM-001-3 (Communications), the associated implementation plan, the retirement of the currently-effective Reliability Standard COM-001-2.1, and VRFs and VSLs associated with new Requirements R12 and R13 in Reliability Standard COM-001-3. The purpose of Reliability Standard COM-001-3 is to establish Interpersonal Communication capabilities necessary to maintain reliability. Reliability Standard COM-001-3 revises Reliability Standard COM-001-2.1 addressing a Commission directive in Order No. 808, by adding new Requirements R12 and R13 to expressly require applicable entities to have internal Interpersonal Communication capabilities for the exchange of information necessary for the Reliable Operation of the BES. Requirements R12 and R13 would ensure that Reliability Standard COM-001-3 clearly address internal Interpersonal Communications capabilities that could involve the issuance or receipt of Operating Instruction or other communication that could impact reliability. This would include, for example, internal Interpersonal Communications capabilities for control centers within the same functional entity (including geographically separate control centers) and/or between a control center and field personnel.

2. Interpretation to CIP-002-5.1a

On December 27, 2016, FERC approved an interpretation of Reliability Standard CIP-002-5.1a (Cyber Security — BES Cyber System Categorization). The interpretation provides that: (1) the phrase “shared BES Cyber Systems” in Criterion 2.1 of Attachment to Reliability Standard CIP-002-5.1 refers to discrete BES Cyber Systems that are shared by multiple generation units; and (2) the evaluation as to whether a BES Cyber System is shared should be performed individually for each discrete BES Cyber System. Interpretations do not change the



substance or intent of the standard and provide clarification on the intent of a requirement. Upon FERC approval of the interpretation, the numbering of the Reliability Standard incrementally changed from CIP-002-5.1 to CIP-002-5.1a.

**III. CONCLUSION**

NERC respectfully requests that the NSUARB approve the Reliability Standards as specified herein.

Respectfully submitted,

/s/ Shamai Elstein

Charles A. Berardesco  
Senior Vice President and General Counsel  
Shamai Elstein  
Senior Counsel  
North American Electric Reliability Corporation  
1325 G Street, N.W., Suite 600  
Washington, D.C. 20005  
(202) 400-3000  
(202) 644-8099– facsimile  
charles.berardesco@nerc.net  
shamai.elstein@nerc.net

*Counsel for the North American Electric  
Reliability Corporation*

Date: February 23, 2017

**Exhibit A (1): Reliability Standard Applicable to Nova Scotia, Approved by FERC in Fourth Quarter 2016**

**Exhibit A (1): Reliability Standard Applicable to Nova Scotia, Approved by FERC in  
Fourth Quarter 2016**

<b>Reliability Standard</b>	<b>Effective Date</b>
Critical Infrastructure Protection (CIP) Standard	
CIP-002-5.1a	12/27/2016
Communications (COM) Standard	
COM-001-3*	10/1/2017

\* At the time of this filing, all standards marked with an asterisk are not yet effective, but have been approved by FERC and have a future mandatory effective date.

**Exhibit A (2)**

**Informational Summary of Each Reliability Standard Applicable to Nova Scotia, Approved by FERC in  
Fourth Quarter 2016**

## **Exhibit A (2): Informational Summary of Each Reliability Standard Applicable to Nova Scotia, Approved by FERC in Fourth Quarter 2016**

**CIP-002-5.1a** - To identify and categorize BES Cyber Systems and their associated BES Cyber Assets for the application of cyber security requirements commensurate with the adverse impact that loss, compromise, or misuse of those BES Cyber Systems could have on the reliable operation of the BES. Identification and categorization of BES Cyber Systems support appropriate protection against compromises that could lead to misoperation or instability in the BES.

Applicability:

- **Functional Entities**
  - **Balancing Authorities**
  - **Distribution Providers that owns** one or more of the following Facilities, systems, and equipment for the protection or restoration of the BES:
    - Each underfrequency load shedding (UFLS) or undervoltage load shedding (UVLS) system that:
      - is part of a Load shedding program that is subject to one or more requirements in a NERC or Regional Reliability Standard; and
      - performs automatic Load shedding under a common control system owned by the Responsible Entity, without human operator initiation, of 300 MW or more.
    - Each Special Protection System or Remedial Action Scheme where the Special Protection System or Remedial Action Scheme is subject to one or more requirements in a NERC or Regional Reliability Standard.
    - Each Protection System (excluding UFLS and UVLS) that applies to Transmission where the Protection System is subject to one or more requirements in a NERC or Regional Reliability Standard.
    - Each Cranking Path and group of Elements meeting the initial switching requirements from a Blackstart Resource up to and including the first interconnection point of the starting station service of the next generation unit(s) to be started.
  - **Generator Operators**
  - **Generator Owners**
  - **Interchange Coordinators or Interchange Authorities**
  - **Reliability Coordinators**
  - **Transmission Operators**
  - **Transmission Owners**
  - **Distribution Providers:** One or more of the following Facilities, systems and equipment owned by the Distribution Provider for the protection or restoration of the BES:
    - Each UFLS or UVLS System that:
      - is part of a Load shedding program that is subject to one or more requirements in a NERC or Regional Reliability Standard; and
      - performs automatic Load shedding under a common control system owned by the Responsible Entity, without human operator initiation, of 300 MW or more.

**Exhibit A (2): Informational Summary of Each Reliability Standard Applicable to Nova Scotia, Approved by FERC in Fourth Quarter 2016**

- Each Special Protection System or Remedial Action Scheme where the Special Protection System or Remedial Action Scheme is subject to one or more requirements in a NERC or Regional Reliability Standard.
- Each Protection System (excluding UFLS and UVLS) that applies to Transmission where the Protection System is subject to one or more requirements in a NERC or Regional Reliability Standard.
- Each Cranking Path and group of Elements meeting the initial switching requirements from a Blackstart Resource up to and including the first interconnection point of the starting station service of the next generation unit(s) to be started.
- Exemptions: The following are exempt from Standard CIP-002-5.1a:
  - Cyber Assets at Facilities regulated by the Canadian Nuclear Safety Commission.
  - Cyber Assets associated with communication networks and data communication links between discrete Electronic Security Perimeters.
  - The systems, structures, and components that are regulated by the Nuclear Regulatory Commission under a cyber security plan pursuant to 10 C.F.R. Section 73.54.
  - For Distribution Providers, the systems and equipment that are not included in section 4.2.1 above.

Reliability Standard CIP-002-5.1a includes two requirements and a CIP Process Flow chart.

On November 28, 2016, the North American Electric Reliability Corporation (“NERC”) filed a petition for approval of an interpretation of Reliability Standard CIP-002-5.1a (Cyber Security — BES Cyber System Categorization) with the Federal Energy Regulatory Commission (“FERC”) in Docket No. RD17-2-000. FERC approved CIP-002-5.1a on December 27, 2016.

**Exhibit A (2): Informational Summary of Each Reliability Standard Applicable to Nova Scotia, Approved by FERC in Fourth Quarter 2016**

**COM-001-3** - To establish Interpersonal Communication capabilities necessary to maintain reliability.

Applicability:

- **Functional Entities**
  - **Transmission Operators**
  - **Balancing Authorities**
  - **Reliability Coordinators**
  - **Distribution Providers**
  - **Generator Operators**

Reliability Standard COM-001-3 includes thirteen requirements.

On August 15, 2016, NERC filed a petition for approval of proposed Reliability Standard COM-001-3 (Communications) with FERC in Docket No. RD16-9-000. FERC approved COM-001-3 on October 28, 2016.

**Exhibit A (3): Reliability Standards Filed for Approval**



**Reliability Standard CIP-002-5.1a**

## A. Introduction

1. **Title:** Cyber Security — BES Cyber System Categorization
2. **Number:** CIP-002-5.1a
3. **Purpose:** To identify and categorize BES Cyber Systems and their associated BES Cyber Assets for the application of cyber security requirements commensurate with the adverse impact that loss, compromise, or misuse of those BES Cyber Systems could have on the reliable operation of the BES. Identification and categorization of BES Cyber Systems support appropriate protection against compromises that could lead to misoperation or instability in the BES.
4. **Applicability:**
  - 4.1. **Functional Entities:** For the purpose of the requirements contained herein, the following list of functional entities will be collectively referred to as “Responsible Entities.” For requirements in this standard where a specific functional entity or subset of functional entities are the applicable entity or entities, the functional entity or entities are specified explicitly.
    - 4.1.1. **Balancing Authority**
    - 4.1.2. **Distribution Provider that owns** one or more of the following Facilities, systems, and equipment for the protection or restoration of the BES:
      - 4.1.2.1. Each underfrequency load shedding (UFLS) or undervoltage load shedding (UVLS) system that:
        - 4.1.2.1.1. is part of a Load shedding program that is subject to one or more requirements in a NERC or Regional Reliability Standard; and
        - 4.1.2.1.2. performs automatic Load shedding under a common control system owned by the Responsible Entity, without human operator initiation, of 300 MW or more.
      - 4.1.2.2. Each Special Protection System or Remedial Action Scheme where the Special Protection System or Remedial Action Scheme is subject to one or more requirements in a NERC or Regional Reliability Standard.
      - 4.1.2.3. Each Protection System (excluding UFLS and UVLS) that applies to Transmission where the Protection System is subject to one or more requirements in a NERC or Regional Reliability Standard.
      - 4.1.2.4. Each Cranking Path and group of Elements meeting the initial switching requirements from a Blackstart Resource up to and including the first interconnection point of the starting station service of the next generation unit(s) to be started.
    - 4.1.3. **Generator Operator**
    - 4.1.4. **Generator Owner**

**4.1.5. Interchange Coordinator or Interchange Authority**

**4.1.6. Reliability Coordinator**

**4.1.7. Transmission Operator**

**4.1.8. Transmission Owner**

**4.2. Facilities:** For the purpose of the requirements contained herein, the following Facilities, systems, and equipment owned by each Responsible Entity in 4.1 above are those to which these requirements are applicable. For requirements in this standard where a specific type of Facilities, system, or equipment or subset of Facilities, systems, and equipment are applicable, these are specified explicitly.

**4.2.1. Distribution Provider:** One or more of the following Facilities, systems and equipment owned by the Distribution Provider for the protection or restoration of the BES:

**4.2.1.1.** Each UFLS or UVLS System that:

**4.2.1.1.1.** is part of a Load shedding program that is subject to one or more requirements in a NERC or Regional Reliability Standard; and

**4.2.1.1.2.** performs automatic Load shedding under a common control system owned by the Responsible Entity, without human operator initiation, of 300 MW or more.

**4.2.1.2.** Each Special Protection System or Remedial Action Scheme where the Special Protection System or Remedial Action Scheme is subject to one or more requirements in a NERC or Regional Reliability Standard.

**4.2.1.3.** Each Protection System (excluding UFLS and UVLS) that applies to Transmission where the Protection System is subject to one or more requirements in a NERC or Regional Reliability Standard.

**4.2.1.4.** Each Cranking Path and group of Elements meeting the initial switching requirements from a Blackstart Resource up to and including the first interconnection point of the starting station service of the next generation unit(s) to be started.

**4.2.2. Responsible Entities listed in 4.1 other than Distribution Providers:**

All BES Facilities.

**4.2.3. Exemptions:** The following are exempt from Standard CIP-002-5.1a:

**4.2.3.1.** Cyber Assets at Facilities regulated by the Canadian Nuclear Safety Commission.

**4.2.3.2.** Cyber Assets associated with communication networks and data communication links between discrete Electronic Security Perimeters.

**4.2.3.3.** The systems, structures, and components that are regulated by the Nuclear Regulatory Commission under a cyber security plan pursuant to 10 C.F.R. Section 73.54.

**4.2.3.4.** For Distribution Providers, the systems and equipment that are not included in section 4.2.1 above.

**5. Effective Dates:**

1. **24 Months Minimum** – CIP-002-5.1a shall become effective on the later of July 1, 2015, or the first calendar day of the ninth calendar quarter after the effective date of the order providing applicable regulatory approval.
2. In those jurisdictions where no regulatory approval is required CIP-002-5.1a shall become effective on the first day of the ninth calendar quarter following Board of Trustees' approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities.

**6. Background:**


This standard provides “bright-line” criteria for applicable Responsible Entities to categorize their BES Cyber Systems based on the impact of their associated Facilities, systems, and equipment, which, if destroyed, degraded, misused, or otherwise rendered unavailable, would affect the reliable operation of the Bulk Electric System. Several concepts provide the basis for the approach to the standard.

Throughout the standards, unless otherwise stated, bulleted items in the requirements are items that are linked with an “or,” and numbered items are items that are linked with an “and.”

Many references in the Applicability section and the criteria in Attachment 1 of CIP-002 use a threshold of 300 MW for UFLS and UVLS. This particular threshold of 300 MW for UVLS and UFLS was provided in Version 1 of the CIP Cyber Security Standards. The threshold remains at 300 MW since it is specifically addressing UVLS and UFLS, which are last ditch efforts to save the Bulk Electric System. A review of UFLS tolerances defined within regional reliability standards for UFLS program requirements to date indicates that the historical value of 300 MW represents an adequate and reasonable threshold value for allowable UFLS operational tolerances.

**BES Cyber Systems**

One of the fundamental differences between Versions 4 and 5 of the CIP Cyber Security Standards is the shift from identifying Critical Cyber Assets to identifying BES Cyber Systems. This change results from the drafting team’s review of the NIST Risk Management Framework and the use of an analogous term “information system” as the target for categorizing and applying security controls.

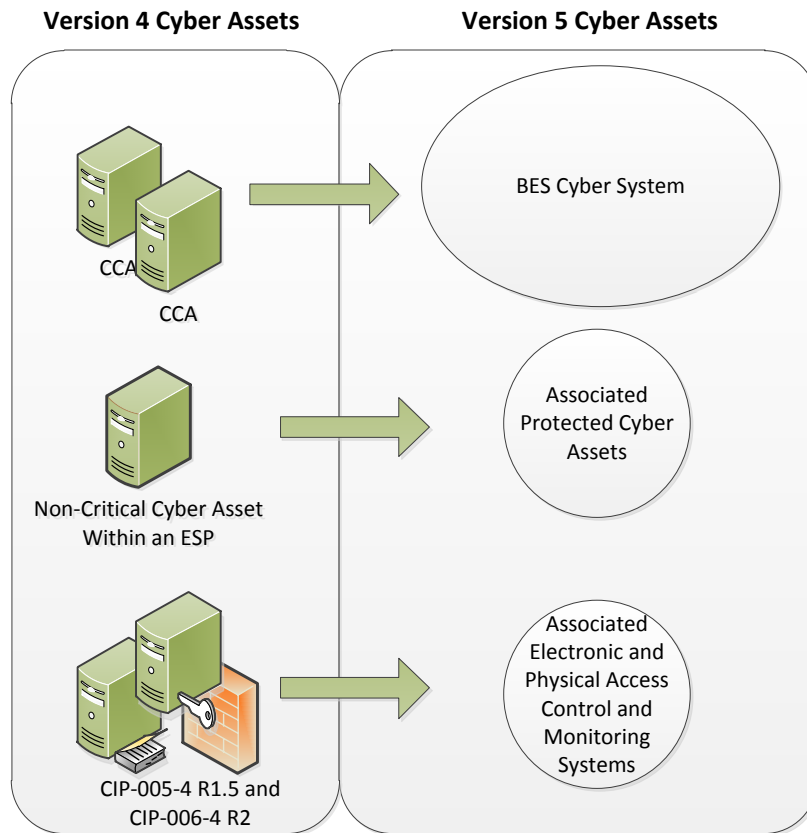

In transitioning from Version 4 to Version 5, a BES Cyber System can be viewed simply as a grouping of Critical Cyber Assets (as that term is used in Version 4). The CIP Cyber Security Standards use the “BES Cyber System” term primarily to provide a higher level for referencing the object of a requirement. For example, it becomes possible to apply requirements dealing with recovery and malware protection to a grouping rather than individual Cyber Assets, and it becomes clearer in the requirement that malware protection applies to the system as a whole and may not be necessary for every individual device to comply.

Another reason for using the term “BES Cyber System” is to provide a convenient level at which a Responsible Entity can organize their documented implementation of the requirements and compliance evidence. Responsible Entities can use the well-developed concept of a *security plan* for each BES Cyber System to document the programs, processes, and plans in place to comply with security requirements.

It is left up to the Responsible Entity to determine the level of granularity at which to identify a BES Cyber System within the qualifications in the definition of BES Cyber System. For example, the Responsible Entity might choose to view an entire plant control system as a single BES Cyber System, or it might choose to view certain components of the plant control system as distinct BES Cyber Systems. The Responsible Entity should take into consideration the operational environment and

scope of management when defining the BES Cyber System boundary in order to maximize efficiency in secure operations. Defining the boundary too tightly may result in redundant paperwork and authorizations, while defining the boundary too broadly could make the secure operation of the BES Cyber System difficult to monitor and assess.

### **Reliable Operation of the BES**

The scope of the CIP Cyber Security Standards is restricted to BES Cyber Systems that would impact the reliable operation of the BES. In order to identify BES Cyber Systems, Responsible Entities determine whether the BES Cyber Systems perform or support any BES reliability function according to those reliability tasks identified for their reliability function and the corresponding functional entity's responsibilities as defined in its relationships with other functional entities in the NERC Functional Model. This ensures that the *initial* scope for consideration includes only those BES Cyber Systems and their associated BES Cyber Assets that perform or support the reliable operation of the BES. The definition of BES Cyber Asset provides the basis for this scoping.

### **Real-time Operations**

One characteristic of the BES Cyber Asset is a real-time scoping characteristic. The time horizon that is significant for BES Cyber Systems and BES Cyber Assets subject to the application of these Version 5 CIP Cyber Security Standards is defined as that which is material to real-time operations for the reliable operation of the BES. To provide a better defined time horizon than "Real-time," BES Cyber Assets are those Cyber Assets that, if rendered unavailable, degraded, or misused, would adversely impact the reliable operation of the BES within 15 minutes of the activation or exercise of the compromise. This time window must not include in its consideration the activation of redundant BES Cyber Assets or BES Cyber Systems: from the cyber security standpoint, redundancy does not mitigate cyber security vulnerabilities.

### **Categorization Criteria**

The criteria defined in Attachment 1 are used to categorize BES Cyber Systems into impact categories. Requirement 1 only requires the discrete identification of BES Cyber Systems for those in the high impact and medium impact categories. All BES Cyber Systems for Facilities not included in Attachment 1 – Impact Rating Criteria, Criteria 1.1 to 1.4 and Criteria 2.1 to 2.11 default to be low impact.

This general process of categorization of BES Cyber Systems based on impact on the reliable operation of the BES is consistent with risk management approaches for the purpose of application of cyber security requirements in the remainder of the Version 5 CIP Cyber Security Standards.

### **Electronic Access Control or Monitoring Systems, Physical Access Control Systems, and Protected Cyber Assets that are associated with BES Cyber Systems**

BES Cyber Systems have associated Cyber Assets, which, if compromised, pose a threat to the BES Cyber System by virtue of: (a) their location within the Electronic Security Perimeter (Protected Cyber Assets), or (b) the security control function they perform (Electronic Access Control or Monitoring Systems and Physical Access Control Systems). These Cyber Assets include:

**Electronic Access Control or Monitoring Systems (“EACMS”)** – Examples include: Electronic Access Points, Intermediate Systems, authentication servers (e.g., RADIUS servers, Active Directory servers, Certificate Authorities), security event monitoring systems, and intrusion detection systems.

**Physical Access Control Systems (“PACS”)**– Examples include: authentication servers, card systems, and badge control systems.

**Protected Cyber Assets (“PCA”)** – Examples may include, to the extent they are within the ESP: file servers, ftp servers, time servers, LAN switches, networked printers, digital fault recorders, and emission monitoring systems.

## B. Requirements and Measures

- R1.** Each Responsible Entity shall implement a process that considers each of the following assets for purposes of parts 1.1 through 1.3: [*Violation Risk Factor: High*][*Time Horizon: Operations Planning*]
- i.** Control Centers and backup Control Centers;
  - ii.** Transmission stations and substations;
  - iii.** Generation resources;
  - iv.** Systems and facilities critical to system restoration, including Blackstart Resources and Cranking Paths and initial switching requirements;
  - v.** Special Protection Systems that support the reliable operation of the Bulk Electric System; and
  - vi.** For Distribution Providers, Protection Systems specified in Applicability section 4.2.1 above.
- 1.1.** Identify each of the high impact BES Cyber Systems according to Attachment 1, Section 1, if any, at each asset;
  - 1.2.** Identify each of the medium impact BES Cyber Systems according to Attachment 1, Section 2, if any, at each asset; and
  - 1.3.** Identify each asset that contains a low impact BES Cyber System according to Attachment 1, Section 3, if any (a discrete list of low impact BES Cyber Systems is not required).
- M1.** Acceptable evidence includes, but is not limited to, dated electronic or physical lists required by Requirement R1, and Parts 1.1 and 1.2.

**R2.** The Responsible Entity shall: [*Violation Risk Factor: Lower*] [*Time Horizon: Operations Planning*]

- 2.1** Review the identifications in Requirement R1 and its parts (and update them if there are changes identified) at least once every 15 calendar months, even if it has no identified items in Requirement R1, and
- 2.2** Have its CIP Senior Manager or delegate approve the identifications required by Requirement R1 at least once every 15 calendar months, even if it has no identified items in Requirement R1.

**M2.** Acceptable evidence includes, but is not limited to, electronic or physical dated records to demonstrate that the Responsible Entity has reviewed and updated, where necessary, the identifications required in Requirement R1 and its parts, and has had its CIP Senior Manager or delegate approve the identifications required in Requirement R1 and its parts at least once every 15 calendar months, even if it has none identified in Requirement R1 and its parts, as required by Requirement R2.

## C. Compliance

### 1. Compliance Monitoring Process:

#### 1.1. Compliance Enforcement Authority:

The Regional Entity shall serve as the Compliance Enforcement Authority (“CEA”) unless the applicable entity is owned, operated, or controlled by the Regional Entity. In such cases the ERO or a Regional Entity approved by FERC or other applicable governmental authority shall serve as the CEA.

#### 1.2. Evidence Retention:

The following evidence retention periods identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the CEA may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

The Responsible Entity shall keep data or evidence to show compliance as identified below unless directed by its CEA to retain specific evidence for a longer period of time as part of an investigation:

- Each Responsible Entity shall retain evidence of each requirement in this standard for three calendar years.
- If a Responsible Entity is found non-compliant, it shall keep information related to the non-compliance until mitigation is complete and approved or for the time specified above, whichever is longer.



- The CEA shall keep the last audit records and all requested and submitted subsequent audit records.

**1.3. Compliance Monitoring and Assessment Processes:**

- Compliance Audit
- Self-Certification
- Spot Checking
- Compliance Investigation
- Self-Reporting
- Complaint

**1.4. Additional Compliance Information**

- None

2. Table of Compliance Elements

R #	Time Horizon	VRF	Violation Severity Levels (CIP-002-5.1a)			
			Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	Operations Planning	High	<p>For Responsible Entities with more than a total of 40 BES assets in Requirement R1, five percent or fewer BES assets have not been considered according to Requirement R1;</p> <p>OR</p> <p>For Responsible Entities with a total of 40 or fewer BES assets, 2 or fewer BES assets in Requirement R1, have not been considered according to Requirement R1;</p> <p>OR</p> <p>For Responsible Entities with more than a total of 100 high and medium impact BES Cyber</p>	<p>For Responsible Entities with more than a total of 40 BES assets in Requirement R1, more than five percent but less than or equal to 10 percent of BES assets have not been considered, according to Requirement R1;</p> <p>OR</p> <p>For Responsible Entities with a total of 40 or fewer BES assets, more than two, but fewer than or equal to four BES assets in Requirement R1, have not been considered according to Requirement R1;</p> <p>OR</p>	<p>For Responsible Entities with more than a total of 40 BES assets in Requirement R1, more than 10 percent but less than or equal to 15 percent of BES assets have not been considered, according to Requirement R1;</p> <p>OR</p> <p>For Responsible Entities with a total of 40 or fewer BES assets, more than four, but fewer than or equal to six BES assets in Requirement R1, have not been considered according to Requirement R1;</p> <p>OR</p>	<p>For Responsible Entities with more than a total of 40 BES assets in Requirement R1, more than 15 percent of BES assets have not been considered, according to Requirement R1;</p> <p>OR</p> <p>For Responsible Entities with a total of 40 or fewer BES assets, more than six BES assets in Requirement R1, have not been considered according to Requirement R1;</p> <p>OR</p> <p>For Responsible Entities with more than a total of 100 high and medium impact BES Cyber</p>

R #	Time Horizon	VRF	Violation Severity Levels (CIP-002-5.1a)			
			Lower VSL	Moderate VSL	High VSL	Severe VSL
			<p>Systems, five percent or fewer of identified BES Cyber Systems have not been categorized or have been incorrectly categorized at a lower category;</p> <p>OR</p> <p>For Responsible Entities with a total of 100 or fewer high and medium impact BES Cyber Systems, five or fewer identified BES Cyber Systems have not been categorized or have been incorrectly categorized at a lower category.</p> <p>OR</p> <p>For Responsible Entities with more than a total of 100 high and medium impact BES Cyber</p>	<p>For Responsible Entities with more than a total of 100 high and medium impact BES Cyber Systems, more than five percent but less than or equal to 10 percent of identified BES Cyber Systems have not been categorized or have been incorrectly categorized at a lower category;</p> <p>OR</p> <p>For Responsible Entities with a total of 100 or fewer high and medium impact and BES Cyber Systems, more than five but less than or equal to 10 identified BES Cyber Systems have not been categorized or have been incorrectly</p>	<p>For Responsible Entities with more than a total of 100 high or medium impact BES Cyber Systems, more than 10 percent but less than or equal to 15 percent of identified BES Cyber Systems have not been categorized or have been incorrectly categorized at a lower category;</p> <p>OR</p> <p>For Responsible Entities with a total of 100 or fewer high or medium impact and BES Cyber Assets, more than 10 but less than or equal to 15 identified BES Cyber Assets have not been categorized or have been incorrectly</p>	<p>Systems, more than 15 percent of identified BES Cyber Systems have not been categorized or have been incorrectly categorized at a lower category;</p> <p>OR</p> <p>For Responsible Entities with a total of 100 or fewer high and medium impact BES Cyber Systems, more than 15 identified BES Cyber Systems have not been categorized or have been incorrectly categorized at a lower category.</p> <p>OR</p> <p>For Responsible Entities with more than a total of 100 high and medium impact BES Cyber</p>

R #	Time Horizon	VRF	Violation Severity Levels (CIP-002-5.1a)			
			Lower VSL	Moderate VSL	High VSL	Severe VSL
			<p>Systems, five percent or fewer high or medium BES Cyber Systems have not been identified;</p> <p>OR</p> <p>For Responsible Entities with a total of 100 or fewer high and medium impact BES Cyber Systems, five or fewer high or medium BES Cyber Systems have not been identified.</p>	<p>categorized at a lower category.</p> <p>OR</p> <p>For Responsible Entities with more than a total of 100 high and medium impact BES Cyber Systems, more than five percent but less than or equal to 10 percent high or medium BES Cyber Systems have not been identified;</p> <p>OR</p> <p>For Responsible Entities with a total of 100 or fewer high and medium impact BES Cyber Systems, more than five but less than or equal to 10 high or medium BES Cyber Systems have not been identified.</p>	<p>categorized at a lower category.</p> <p>OR</p> <p>For Responsible Entities with more than a total of 100 high and medium impact BES Cyber Systems, more than 10 percent but less than or equal to 15 percent high or medium BES Cyber Systems have not been identified;</p> <p>OR</p> <p>For Responsible Entities with a total of 100 or fewer high and medium impact BES Cyber Systems, more than 10 but less than or equal to 15 high or medium BES Cyber Systems have not been identified.</p>	<p>Systems, more than 15 percent of high or medium impact BES Cyber Systems have not been identified;</p> <p>OR</p> <p>For Responsible Entities with a total of 100 or fewer high and medium impact BES Cyber Systems, more than 15 high or medium impact BES Cyber Systems have not been identified.</p>

R #	Time Horizon	VRF	Violation Severity Levels (CIP-002-5.1a)			
			Lower VSL	Moderate VSL	High VSL	Severe VSL
<b>R2</b>	<b>Operations Planning</b>	<b>Lower</b>	<p>The Responsible Entity did not complete its review and update for the identification required for R1 within 15 calendar months but less than or equal to 16 calendar months of the previous review. (R2.1)</p> <p>OR</p> <p>The Responsible Entity did not complete its approval of the identifications required by R1 by the CIP Senior Manager or delegate according to Requirement R2 within 15 calendar months but less than or equal to 16 calendar months of the previous approval. (R2.2)</p>	<p>The Responsible Entity did not complete its review and update for the identification required for R1 within 16 calendar months but less than or equal to 17 calendar months of the previous review. (R2.1)</p> <p>OR</p> <p>The Responsible Entity failed to complete its approval of the identifications required by R1 by the CIP Senior Manager or delegate according to Requirement R2 within 16 calendar months but less than or equal to 17 calendar months of the previous approval. (R2.2)</p>	<p>The Responsible Entity did not complete its review and update for the identification required for R1 within 17 calendar months but less than or equal to 18 calendar months of the previous review. (R2.1)</p> <p>OR</p> <p>The Responsible Entity failed to complete its approval of the identifications required by R1 by the CIP Senior Manager or delegate according to Requirement R2 within 17 calendar months but less than or equal to 18 calendar months of the previous approval. (R2.2)</p>	<p>The Responsible Entity did not complete its review and update for the identification required for R1 within 18 calendar months of the previous review. (R2.1)</p> <p>OR</p> <p>The Responsible Entity failed to complete its approval of the identifications required by R1 by the CIP Senior Manager or delegate according to Requirement R2 within 18 calendar months of the previous approval. (R2.2)</p>

**D. Regional Variances**

None.

**E. Interpretations**

None.

**F. Associated Documents**

None.

## **CIP-002-5.1a - Attachment 1**

### **Impact Rating Criteria**

*The criteria defined in Attachment 1 do not constitute stand-alone compliance requirements, but are criteria characterizing the level of impact and are referenced by requirements.*

#### **1. High Impact Rating (H)**

Each BES Cyber System used by and located at any of the following:

- 1.1.** Each Control Center or backup Control Center used to perform the functional obligations of the Reliability Coordinator.
- 1.2.** Each Control Center or backup Control Center used to perform the functional obligations of the Balancing Authority: 1) for generation equal to or greater than an aggregate of 3000 MW in a single Interconnection, or 2) for one or more of the assets that meet criterion 2.3, 2.6, or 2.9.
- 1.3.** Each Control Center or backup Control Center used to perform the functional obligations of the Transmission Operator for one or more of the assets that meet criterion 2.2, 2.4, 2.5, 2.7, 2.8, 2.9, or 2.10.
- 1.4.** Each Control Center or backup Control Center used to perform the functional obligations of the Generator Operator for one or more of the assets that meet criterion 2.1, 2.3, 2.6, or 2.9.

#### **2. Medium Impact Rating (M)**

Each BES Cyber System, not included in Section 1 above, associated with any of the following:

- 2.1.** Commissioned generation, by each group of generating units at a single plant location, with an aggregate highest rated net Real Power capability of the preceding 12 calendar months equal to or exceeding 1500 MW in a single Interconnection. For each group of generating units, the only BES Cyber Systems that meet this criterion are those shared BES Cyber Systems that could, within 15 minutes, adversely impact the reliable operation of any combination of units that in aggregate equal or exceed 1500 MW in a single Interconnection.
- 2.2.** Each BES reactive resource or group of resources at a single location (excluding generation Facilities) with an aggregate maximum Reactive Power nameplate rating of 1000 MVAR or greater (excluding those at generation Facilities). The only BES Cyber Systems that meet this criterion are those shared BES Cyber Systems that could, within 15 minutes, adversely impact the reliable operation of any combination of resources that in aggregate equal or exceed 1000 MVAR.

- 2.3. Each generation Facility that its Planning Coordinator or Transmission Planner designates, and informs the Generator Owner or Generator Operator, as necessary to avoid an Adverse Reliability Impact in the planning horizon of more than one year.
- 2.4. Transmission Facilities operated at 500 kV or higher. For the purpose of this criterion, the collector bus for a generation plant is not considered a Transmission Facility, but is part of the generation interconnection Facility.
- 2.5. Transmission Facilities that are operating between 200 kV and 499 kV at a single station or substation, where the station or substation is connected at 200 kV or higher voltages to three or more other Transmission stations or substations and has an "aggregate weighted value" exceeding 3000 according to the table below. The "aggregate weighted value" for a single station or substation is determined by summing the "weight value per line" shown in the table below for each incoming and each outgoing BES Transmission Line that is connected to another Transmission station or substation. For the purpose of this criterion, the collector bus for a generation plant is not considered a Transmission Facility, but is part of the generation interconnection Facility.

Voltage Value of a Line	Weight Value per Line
less than 200 kV (not applicable)	(not applicable)
200 kV to 299 kV	700
300 kV to 499 kV	1300
500 kV and above	0

- 2.6. Generation at a single plant location or Transmission Facilities at a single station or substation location that are identified by its Reliability Coordinator, Planning Coordinator, or Transmission Planner as critical to the derivation of Interconnection Reliability Operating Limits (IROLs) and their associated contingencies.
- 2.7. Transmission Facilities identified as essential to meeting Nuclear Plant Interface Requirements.
- 2.8. Transmission Facilities, including generation interconnection Facilities, providing the generation interconnection required to connect generator output to the Transmission Systems that, if destroyed, degraded, misused, or otherwise rendered unavailable, would result in the loss of the generation Facilities identified by any Generator Owner as a result of its application of Attachment 1, criterion 2.1 or 2.3.
- 2.9. Each Special Protection System (SPS), Remedial Action Scheme (RAS), or automated switching System that operates BES Elements, that, if destroyed, degraded, misused or otherwise rendered unavailable, would cause one or more Interconnection Reliability Operating Limits (IROLs) violations for failure to operate as designed or cause a reduction in one or more IROLs if destroyed, degraded, misused, or otherwise rendered unavailable.



- 2.10.** Each system or group of Elements that performs automatic Load shedding under a common control system, without human operator initiation, of 300 MW or more implementing undervoltage load shedding (UVLS) or underfrequency load shedding (UFLS) under a load shedding program that is subject to one or more requirements in a NERC or regional reliability standard.
- 2.11.** Each Control Center or backup Control Center, not already included in High Impact Rating (H) above, used to perform the functional obligations of the Generator Operator for an aggregate highest rated net Real Power capability of the preceding 12 calendar months equal to or exceeding 1500 MW in a single Interconnection.
- 2.12.** Each Control Center or backup Control Center used to perform the functional obligations of the Transmission Operator not included in High Impact Rating (H), above.
- 2.13.** Each Control Center or backup Control Center, not already included in High Impact Rating (H) above, used to perform the functional obligations of the Balancing Authority for generation equal to or greater than an aggregate of 1500 MW in a single Interconnection.

### **3. Low Impact Rating (L)**

BES Cyber Systems not included in Sections 1 or 2 above that are associated with any of the following assets and that meet the applicability qualifications in Section 4 - Applicability, part 4.2 – Facilities, of this standard:

- 3.1.** Control Centers and backup Control Centers.
- 3.2.** Transmission stations and substations.
- 3.3.** Generation resources.
- 3.4.** Systems and facilities critical to system restoration, including Blackstart Resources and Cranking Paths and initial switching requirements.
- 3.5.** Special Protection Systems that support the reliable operation of the Bulk Electric System.
- 3.6.** For Distribution Providers, Protection Systems specified in Applicability section 4.2.1 above.

## Guidelines and Technical Basis

### Section 4 – Scope of Applicability of the CIP Cyber Security Standards

Section “4. Applicability” of the standards provides important information for Responsible Entities to determine the scope of the applicability of the CIP Cyber Security Requirements.

Section “4.1. Functional Entities” is a list of NERC functional entities to which the standard applies. If the entity is registered as one or more of the functional entities listed in section 4.1, then the NERC CIP Cyber Security Standards apply. Note that there is a qualification in section 4.1 that restricts the applicability in the case of Distribution Providers to only those that own certain types of systems and equipment listed in 4.2.

Section “4.2. Facilities” defines the scope of the Facilities, systems, and equipment owned by the Responsible Entity, as qualified in section 4.1, that is subject to the requirements of the standard. In addition to the set of BES Facilities, Control Centers, and other systems and equipment, the list includes the qualified set of systems and equipment owned by Distribution Providers. While the NERC Glossary term “Facilities” already includes the BES characteristic, the additional use of the term BES here is meant to reinforce the scope of applicability of these Facilities where it is used, especially in this applicability scoping section. This in effect sets the scope of Facilities, systems, and equipment that is subject to the standards. This section is especially significant in CIP-002-5.1a and represents the total scope of Facilities, systems, and equipment to which the criteria in Attachment 1 apply. This is important because it determines the balance of these Facilities, systems, and equipment that are Low Impact once those that qualify under the High and Medium Impact categories are filtered out.

For the purpose of identifying groups of Facilities, systems, and equipment, whether by location or otherwise, the Responsible Entity identifies assets as described in Requirement R1 of CIP-002-5.1a. This is a process familiar to Responsible Entities that have to comply with versions 1, 2, 3, and 4 of the CIP standards for Critical Assets. As in versions 1, 2, 3, and 4, Responsible Entities may use substations, generation plants, and Control Centers at single site locations as identifiers of these groups of Facilities, systems, and equipment.

#### **CIP-002-5.1a**

CIP-002-5.1a requires that applicable Responsible Entities categorize their BES Cyber Systems and associated BES Cyber Assets according to the criteria in Attachment 1. A BES Cyber Asset includes in its definition, “...that if rendered unavailable, degraded, or misused would, within 15 minutes adversely impact the reliable operation of the BES.”

The following provides guidance that a Responsible Entity may use to identify the BES Cyber Systems that would be in scope. The concept of BES reliability operating service is useful in providing Responsible Entities with the option of a defined process for scoping those BES Cyber

Systems that would be subject to CIP-002-5.1a. The concept includes a number of named BES reliability operating services. These named services include:

- Dynamic Response to BES conditions
- Balancing Load and Generation
- Controlling Frequency (Real Power)
- Controlling Voltage (Reactive Power)
- Managing Constraints
- Monitoring & Control
- Restoration of BES
- Situational Awareness
- Inter-Entity Real-Time Coordination and Communication

Responsibility for the reliable operation of the BES is spread across all Entity Registrations. Each entity registration has its own special contribution to reliable operations and the following discussion helps identify which entity registration, in the context of those functional entities to which these CIP standards apply, performs which reliability operating service, as a process to identify BES Cyber Systems that would be in scope. The following provides guidance for Responsible Entities to determine applicable reliability operations services according to their Function Registration type.

Entity Registration	RC	BA	TOP	TO	DP	GOP	GO
Dynamic Response		X	X	X	X	X	X
Balancing Load & Generation	X	X	X	X	X	X	X
Controlling Frequency		X				X	X
Controlling Voltage			X	X	X		X
Managing Constraints	X		X			X	
Monitoring and Control			X			X	
Restoration			X			X	
Situation Awareness	X	X	X			X	
Inter-Entity coordination	X	X	X	X		X	X

**Dynamic Response**

The Dynamic Response Operating Service includes those actions performed by BES Elements or subsystems which are automatically triggered to initiate a response to a BES condition. These actions are triggered by a single element or control device or a combination of these elements or devices in concert to perform an action or cause a condition in reaction to the triggering action or condition. The types of dynamic responses that may be considered as potentially having an impact on the BES are:

- Spinning reserves (contingency reserves)
  - Providing actual reserve generation when called upon (GO,GOP)
  - Monitoring that reserves are sufficient (BA)
- Governor Response
  - Control system used to actuate governor response (GO)
- Protection Systems (transmission & generation)
  - Lines, buses, transformers, generators (DP, TO, TOP, GO, GOP)
  - Zone protection for breaker failure (DP, TO, TOP)
  - Breaker protection (DP, TO, TOP)
  - Current, frequency, speed, phase (TO,TOP, GO,GOP)
- Special Protection Systems or Remedial Action Schemes
  - Sensors, relays, and breakers, possibly software (DP, TO, TOP)
- Under and Over Frequency relay protection (includes automatic load shedding)
  - Sensors, relays & breakers (DP)
- Under and Over Voltage relay protection (includes automatic load shedding)
  - Sensors, relays & breakers (DP)
- Power System Stabilizers (GO)

### **Balancing Load and Generation**

The Balancing Load and Generation Operations Service includes activities, actions and conditions necessary for monitoring and controlling generation and load in the operations planning horizon and in real-time. Aspects of the Balancing Load and Generation function include, but are not limited to:

- Calculation of Area Control Error (ACE)
  - Field data sources (real time tie flows, frequency sources, time error, etc) (TO, TOP)
  - Software used to perform calculation (BA)
- Demand Response
  - Ability to identify load change need (BA)
  - Ability to implement load changes (TOP,DP)
- Manually Initiated Load shedding
  - Ability to identify load change need (BA)
  - Ability to implement load changes (TOP, DP)

- Non-spinning reserve (contingency reserve)
  - Know generation status, capability, ramp rate, start time (GO, BA)
  - Start units and provide energy (GOP)

### **Controlling Frequency (Real Power)**

The Controlling Frequency Operations Service includes activities, actions and conditions which ensure, in real time, that frequency remains within bounds acceptable for the reliability or operability of the BES. Aspects of the Controlling Frequency function include, but are limited to:

- Generation Control (such as AGC)
  - ACE, current generator output, ramp rate, unit characteristics (BA, GOP, GO)
  - Software to calculate unit adjustments (BA)
  - Transmit adjustments to individual units (GOP)
  - Unit controls implementing adjustments (GOP)
- Regulation (regulating reserves)
  - Frequency source, schedule (BA)
  - Governor control system (GO)

### **Controlling Voltage (Reactive Power)**

The Controlling Voltage Operations Service includes activities, actions and conditions which ensure, in real time, that voltage remains within bounds acceptable for the reliability or operability of the BES. Aspects of the Controlling Voltage function include, but are not limited to:

- Automatic Voltage Regulation (AVR)
  - Sensors, stator control system, feedback (GO)
- Capacitive resources
  - Status, control (manual or auto), feedback (TOP, TO,DP)
- Inductive resources (transformer tap changer, or inductors)
  - Status, control (manual or auto), feedback (TOP,TO,DP)
- Static VAR Compensators (SVC)
  - Status, computations, control (manual or auto), feedback (TOP, TO,DP)

### **Managing Constraints**

Managing Constraints includes activities, actions and conditions that are necessary to ensure that elements of the BES operate within design limits and constraints established for the reliability and operability of the BES. Aspects of the Managing Constraints include, but are not limited to:

- Available Transfer Capability (ATC) (TOP)
- Interchange schedules (TOP, RC)
- Generation re-dispatch and unit commit (GOP)
- Identify and monitor SOL's & IROL's (TOP, RC)
- Identify and monitor Flow gates (TOP, RC)

### **Monitoring and Control**

Monitoring and Control includes those activities, actions and conditions that provide monitoring and control of BES Elements. An example aspect of the Control and Operation function is:

- All methods of operating breakers and switches
  - SCADA (TOP, GOP)
  - Substation automation (TOP)

### **Restoration of BES**

The Restoration of BES Operations Service includes activities, actions and conditions necessary to go from a shutdown condition to an operating condition delivering electric power without external assistance. Aspects of the Restoration of BES function include, but are not limited to:

- Restoration including planned cranking path
  - Through black start units (TOP, GOP)
  - Through tie lines (TOP, GOP)
- Off-site power for nuclear facilities. (TOP, TO, BA, RC, DP, GO, GOP)
- Coordination (TOP, TO, BA, RC, DP, GO, GOP)

### **Situational Awareness**

The Situational Awareness function includes activities, actions and conditions established by policy, directive or standard operating procedure necessary to assess the current condition of the BES and anticipate effects of planned and unplanned changes to conditions. Aspects of the Situation Awareness function include:

- Monitoring and alerting (such as EMS alarms) (TOP, GOP, RC,BA)
- Change management (TOP,GOP,RC,BA)
- Current Day and Next Day planning (TOP)
- Contingency Analysis (RC)
- Frequency monitoring (BA, RC)

### **Inter-Entity Coordination**

The Inter-Entity coordination and communication function includes activities, actions, and conditions established by policy, directive, or standard operating procedure necessary for the coordination and communication between Responsible Entities to ensure the reliability and operability of the BES. Aspects of the Inter-Entity Coordination and Communication function include:

- Scheduled interchange (BA,TOP,GOP,RC)
- Facility operational data and status (TO, TOP, GO, GOP, RC, BA)
- Operational directives (TOP, RC, BA)

### **Applicability to Distribution Providers**

It is expected that only Distribution Providers that own or operate facilities that qualify in the Applicability section will be subject to these Version 5 Cyber Security Standards. Distribution Providers that do not own or operate any facility that qualifies are not subject to these standards. The qualifications are based on the requirements for registration as a Distribution Provider and on the requirements applicable to Distribution Providers in NERC Standard EOP-005.

### **Requirement R1:**

Requirement R1 implements the methodology for the categorization of BES Cyber Systems according to their impact on the BES. Using the traditional risk assessment equation, it reduces the measure of the risk to an impact (consequence) assessment, assuming the vulnerability index of 1 (the Systems are assumed to be vulnerable) and a probability of threat of 1 (100 percent). The criteria in Attachment 1 provide a measure of the impact of the BES assets supported by these BES Cyber Systems.

Responsible Entities are required to identify and categorize those BES Cyber Systems that have high and medium impact. BES Cyber Systems for BES assets not specified in Attachment 1, Criteria 1.1 – 1.4 and Criteria 2.1 – 2.11 default to low impact.

## **Attachment 1**

### **Overall Application**

In the application of the criteria in Attachment 1, Responsible Entities should note that the approach used is based on the impact of the BES Cyber System as measured by the bright-line criteria defined in Attachment 1.

- When the drafting team uses the term “Facilities”, there is some latitude to Responsible Entities to determine included Facilities. The term Facility is defined in the NERC Glossary of Terms as “A set of electrical equipment that operates as a single Bulk Electric System Element (e.g., a line, a generator, a shunt compensator, transformer, etc.).” In most cases, the criteria refer to a group of Facilities in a given location that supports the reliable operation of the BES. For example, for Transmission assets, the substation may be designated as the group of Facilities. However, in a substation that includes equipment that supports BES operations along with equipment that only supports Distribution operations, the Responsible Entity may be better served to consider only the group of Facilities that supports BES operation. In that case, the Responsible Entity may designate the group of Facilities by location, with qualifications on the group of Facilities that supports reliable operation of the BES, as the Facilities that are subject to the criteria for categorization of BES Cyber Systems. Generation Facilities are separately discussed in the Generation section below. In CIP-002-5.1a, these groups of Facilities, systems, and equipment are sometimes designated as BES assets. For example, an identified BES asset may be a named substation, generating plant, or Control Center. Responsible Entities have flexibility in how they group Facilities, systems, and equipment at a location.
- In certain cases, a BES Cyber System may be categorized by meeting multiple criteria. In such cases, the Responsible Entity may choose to document all criteria that result in the categorization. This will avoid inadvertent miscategorization when it no longer meets one of the criteria, but still meets another.
- It is recommended that each BES Cyber System should be listed by only one Responsible Entity. Where there is joint ownership, it is advisable that the owning Responsible Entities should formally agree on the designated Responsible Entity responsible for compliance with the standards.

### **High Impact Rating (H)**

This category includes those BES Cyber Systems, used by and at Control Centers (and the associated data centers included in the definition of Control Centers), that perform the functional obligations of the Reliability Coordinator (RC), Balancing Authority (BA), Transmission Operator (TOP), or Generator Operator (GOP), as defined under the Tasks heading of the applicable Function and the Relationship with Other Entities heading of the functional entity in the NERC Functional Model, and as scoped by the qualification in Attachment 1, Criteria 1.1, 1.2, 1.3 and 1.4. While those entities that have been registered as the above-named functional entities are specifically referenced, it must be noted that there may be agreements where some



of the functional obligations of a Transmission Operator may be delegated to a Transmission Owner (TO). In these cases, BES Cyber Systems at these TO Control Centers that perform these functional obligations would be subject to categorization as high impact. The criteria notably specifically emphasize functional obligations, not necessarily the RC, BA, TOP, or GOP facilities. One must note that the definition of Control Center specifically refers to reliability tasks for RCs, Bas, TOPs, and GOPs. A TO BES Cyber System in a TO facility that does not perform or does not have an agreement with a TOP to perform any of these functional tasks does not meet the definition of a Control Center. However, if that BES Cyber System operates any of the facilities that meet criteria in the Medium Impact category, that BES Cyber System would be categorized as a Medium Impact BES Cyber System.

The 3000 MW threshold defined in criterion 1.2 for BA Control Centers provides a sufficient differentiation of the threshold defined for Medium Impact BA Control Centers. An analysis of BA footprints shows that the majority of Bas with significant impact are covered under this criterion.

Additional thresholds as specified in the criteria apply for this category.

### **Medium Impact Rating (M)**

#### **Generation**

The criteria in Attachment 1's medium impact category that generally apply to Generation Owner and Operator (GO/GOP) Registered Entities are criteria 2.1, 2.3, 2.6, 2.9, and 2.11. Criterion 2.13 for BA Control Centers is also included here.

- Criterion 2.1 designates as medium impact those BES Cyber Systems that impact generation with a net Real Power capability exceeding 1500 MW. The 1500 MW criterion is sourced partly from the Contingency Reserve requirements in NERC standard BAL-002, whose purpose is "to ensure the Balancing Authority is able to utilize its Contingency Reserve to balance resources and demand and return Interconnection frequency within defined limits following a Reportable Disturbance." In particular, it requires that "as a minimum, the Balancing Authority or Reserve Sharing Group shall carry at least enough Contingency Reserve to cover the most severe single contingency." The drafting team used 1500 MW as a number derived from the most significant Contingency Reserves operated in various Bas in all regions.

In the use of net Real Power capability, the drafting team sought to use a value that could be verified through existing requirements as proposed by NERC standard MOD-024 and current development efforts in that area.

By using 1500 MW as a bright-line, the intent of the drafting team was to ensure that BES Cyber Systems with common mode vulnerabilities that could result in the loss of 1500 MW or more of generation at a single plant for a unit or group of units are adequately protected.

The drafting team also used additional time and value parameters to ensure the bright-lines and the values used to measure against them were relatively stable over the review period. Hence, where multiple values of net Real Power capability could be used for the Facilities' qualification against these bright-lines, the highest value was used.

- In Criterion 2.3, the drafting team sought to ensure that BES Cyber Systems for those generation Facilities that have been designated by the Planning Coordinator or Transmission Planner as necessary to avoid BES Adverse Reliability Impacts in the planning horizon of one year or more are categorized as medium impact. In specifying a planning horizon of one year or more, the intent is to ensure that those are units that are identified as a result of a "long term" reliability planning, i.e that the plans are spanning an operating period of at least 12 months: it does not mean that the operating day for the unit is necessarily beyond one year, but that the period that is being planned for is more than 1 year: it is specifically intended to avoid designating generation that is required to be run to remediate short term emergency reliability issues. These Facilities may be designated as "Reliability Must Run," and this designation is distinct from those generation Facilities designated as "must run" for market stabilization purposes. Because the use of the term "must run" creates some confusion in many areas, the drafting team chose to avoid using this term and instead drafted the requirement in more generic reliability language. In particular, the focus on preventing an Adverse Reliability Impact dictates that these units are designated as must run for reliability purposes beyond the local area. Those units designated as must run for voltage support in the local area would not generally be given this designation. In cases where there is no designated Planning Coordinator, the Transmission Planner is included as the Registered Entity that performs this designation.

If it is determined through System studies that a unit must run in order to preserve the reliability of the BES, such as due to a Category C3 contingency as defined in TPL-003, then BES Cyber Systems for that unit are categorized as medium impact.

The TPL standards require that, where the studies and plans indicate additional actions, that these studies and plans be communicated by the Planning Coordinator or Transmission Planner in writing to the Regional Entity/RRO. Actions necessary for the implementation of these plans by affected parties (generation owners/operators and Reliability Coordinators or other necessary party) are usually formalized in the form of an agreement and/or contract.

- Criterion 2.6 includes BES Cyber Systems for those Generation Facilities that have been identified as critical to the derivation of IROLs and their associated contingencies, as specified by FAC-014-2, **Establish and Communicate System Operating Limits**, R5.1.1 and R5.1.3.

IROLs may be based on dynamic System phenomena such as instability or voltage collapse. Derivation of these IROLs and their associated contingencies often considers the effect of generation inertia and AVR response.

- Criterion 2.9 categorizes BES Cyber Systems for Special Protection Systems and Remedial Action Schemes as medium impact. Special Protection Systems and Remedial Action Schemes may be implemented to prevent disturbances that would result in exceeding IROLs if they do not provide the function required at the time it is required or if it operates outside of the parameters it was designed for. Generation Owners and Generator Operators which own BES Cyber Systems for such Systems and schemes designate them as medium impact.
- Criterion 2.11 categorizes as medium impact BES Cyber Systems used by and at Control Centers that perform the functional obligations of the Generator Operator for an aggregate generation of 1500 MW or higher in a single interconnection, and that have not already been included in Part 1.
- Criterion 2.13 categorizes as medium impact those BA Control Centers that “control” 1500 MW of generation or more in a single interconnection and that have not already been included in Part 1. The 1500 MW threshold is consistent with the impact level and rationale specified for Criterion 2.1.

### Transmission

*The SDT uses the phrases “Transmission Facilities at a single station or substation” and “Transmission stations or substations” to recognize the existence of both stations and substations. Many entities in industry consider a substation to be a location with physical borders (i.e. fence, wall, etc.) that contains at least an autotransformer. Locations also exist that do not contain autotransformers, and many entities in industry refer to those locations as stations (or switchyards). Therefore, the SDT chose to use both “station” and “substation” to refer to the locations where groups of Transmission Facilities exist.*

- Criteria 2.2, 2.4 through 2.10, and 2.12 in Attachment 1 are the criteria that are applicable to Transmission Owners and Operators. In many of the criteria, the impact threshold is defined as the capability of the failure or compromise of a System to result in exceeding one or more Interconnection Reliability Operating Limits (IROLs). Criterion 2.2 includes BES Cyber Systems for those Facilities in Transmission Systems that provide reactive resources to enhance and preserve the reliability of the BES. The nameplate value is used here because there is no NERC requirement to verify actual capability of these Facilities. The value of 1000 MVARs used in this criterion is a value deemed reasonable for the purpose of determining criticality.
- Criterion 2.4 includes BES Cyber Systems for any Transmission Facility at a substation operated at 500 kV or higher. While the drafting team felt that Facilities operated at 500 kV or higher did not require any further qualification for their role as components of the backbone on the Interconnected BES, Facilities in the lower EHV range should have additional qualifying criteria for inclusion in the medium impact category.

It must be noted that if the collector bus for a generation plant (i.e. the plant is smaller in aggregate than the threshold set for generation in Criterion 2.1) is operated at 500kV, the collector bus should be considered a Generation Interconnection Facility, and not a Transmission Facility, according to the “Final Report from the Ad Hoc Group for Generation Requirements at the Transmission Interface.” This collector bus would not be a facility for a medium impact BES Cyber System because it does not significantly affect the 500kV Transmission grid; it only affects a plant which is below the generation threshold.

- Criterion 2.5 includes BES Cyber Systems for facilities at the lower end of BES Transmission with qualifications for inclusion if they are deemed highly likely to have significant impact on the BES. While the criterion has been specified as part of the rationale for requiring protection for significant impact on the BES, the drafting team included, in this criterion, additional qualifications that would ensure the required level of impact to the BES. The drafting team:
  - Excluded radial facilities that would only provide support for single generation facilities.
  - Specified interconnection to at least three transmission stations or substations to ensure that the level of impact would be appropriate.

The total aggregated weighted value of 3,000 was derived from weighted values related to three connected 345 kV lines and five connected 230 kV lines at a transmission station or substation. The total aggregated weighted value is used to account for the true impact to the BES, irrespective of line kV rating and mix of multiple kV rated lines.

Additionally, in NERC’s document “[Integrated Risk Assessment Approach – Refinement to Severity Risk Index](#)”, Attachment 1, the report used an average MVA line loading based on kV rating:

- 230 kV → 700 MVA
- 345 kV → 1,300 MVA
- 500 kV → 2,000 MVA
- 765 kV → 3,000 MVA

In the terms of applicable lines and connecting “other Transmission stations or substations” determinations, the following should be considered:

- For autotransformers in a station, Responsible Entities have flexibility in determining whether the groups of Facilities are considered a single substation or station location or multiple substations or stations. In most cases, Responsible Entities would probably consider them as Facilities at a single substation or station unless geographically dispersed. In these cases of these transformers being within the “fence” of the substation or station, autotransformers may not count as separate

connections to other stations. The use of common BES Cyber Systems may negate any rationale for any consideration otherwise. In the case of autotransformers that are geographically dispersed from a station location, the calculation would take into account the connections in and out of each station or substation location.

- Multiple-point (or multiple-tap) lines are considered to contribute a single weight value per line and affect the number of connections to other stations. Therefore, a single 230 kV multiple-point line between three Transmission stations or substations would contribute an aggregated weighted value of 700 and connect Transmission Facilities at a single station or substation to two other Transmission stations or substations.
- Multiple lines between two Transmission stations or substations are considered to contribute multiple weight values per line, but these multiple lines between the two stations only connect one station to one other station. Therefore, two 345 kV lines between two Transmission stations or substations would contribute an aggregated weighted value of 2600 and connect Transmission Facilities at a single station or substation to one other Transmission station or substation.

Criterion 2.5's qualification for Transmission Facilities at a Transmission station or substation is based on 2 distinct conditions.

1. The first condition is that Transmission Facilities at a single station or substation where that station or substation connect, at voltage levels of 200 kV or higher to three (3) other stations or substations, to three other stations or substations. This qualification is meant to ensure that connections that operate at voltages of 500 kV or higher are included in the count of connections to other stations or substations as well.
2. The second qualification is that the aggregate value of all lines entering or leaving the station or substation must exceed 3000. This qualification does not include the consideration of lines operating at lower than 200 kV, or 500 kV or higher, the latter already qualifying as medium impact under criterion 2.4. : there is no value to be assigned to lines at voltages of less than 200 kV or 500 kV or higher in the table of values for the contribution to the aggregate value of 3000.

The Transmission Facilities at the station or substation must meet both qualifications to be considered as qualified under criterion 2.5.

- Criterion 2.6 include BES Cyber Systems for those Transmission Facilities that have been identified as critical to the derivation of IROLs and their associated contingencies, as specified by FAC-014-2, **Establish and Communicate System Operating Limits**, R5.1.1 and R5.1.3.

- Criterion 2.7 is sourced from the NUC-001 NERC standard, Requirement R9.2.2, for the support of Nuclear Facilities. NUC-001 ensures that reliability of NPIR's are ensured through adequate coordination between the Nuclear Generator Owner/Operator and its Transmission provider "for the purpose of ensuring nuclear plant safe operation and shutdown." In particular, there are specific requirements to coordinate physical and cyber security protection of these interfaces.
- Criterion 2.8 designates as medium impact those BES Cyber Systems that impact Transmission Facilities necessary to directly support generation that meet the criteria in Criteria 2.1 (generation Facilities with output greater than 1500 MW) and 2.3 (generation Facilities generally designated as "must run" for wide area reliability in the planning horizon). The Responsible Entity can request a formal statement from the Generation owner as to the qualification of generation Facilities connected to their Transmission systems.
- Criterion 2.9 designates as medium impact those BES Cyber Systems for those Special Protection Systems (SPS), Remedial Action Schemes (RAS), or automated switching Systems installed to ensure BES operation within IROs. The degradation, compromise or unavailability of these BES Cyber Systems would result in exceeding IROs if they fail to operate as designed. By the definition of IRO, the loss or compromise of any of these have Wide Area impacts.
- Criterion 2.10 designates as medium impact those BES Cyber Systems for Systems or Elements that perform automatic Load shedding, without human operator initiation, of 300 MW or more. The SDT spent considerable time discussing the wording of Criterion 2.10, and chose the term "Each" to represent that the criterion applied to a discrete System or Facility. In the drafting of this criterion, the drafting team sought to include only those Systems that did not require human operator initiation, and targeted in particular those underfrequency load shedding (UFLS) Facilities and systems and undervoltage load shedding (UVLS) systems and Elements that would be subject to a regional Load shedding requirement to prevent Adverse Reliability Impact. These include automated UFLS systems or UVLS systems that are capable of Load shedding 300 MW or more. It should be noted that those qualifying systems which require a human operator to arm the system, but once armed, trigger automatically, are still to be considered as not requiring human operator initiation and should be designated as medium impact. The 300 MW threshold has been defined as the aggregate of the highest MW Load value, as defined by the applicable regional Load Shedding standards, for the preceding 12 months to account for seasonal fluctuations.

This particular threshold (300 MW) was provided in CIP, Version 1. The SDT believes that the threshold should be lower than the 1500MW generation requirement since it is specifically addressing UVLS and UFLS, which are last ditch efforts to save the Bulk Electric System and hence requires a lower threshold. A review of UFLS tolerances defined within regional reliability standards for UFLS program requirements to date indicates that the historical value of 300 MW represents an adequate and reasonable threshold value for allowable UFLS operational tolerances.

In ERCOT, the Load acting as a Resource (“LaAR”) Demand Response Program is not part of the regional load shedding program, but an ancillary services market. In general, similar demand response programs that are not part of the NERC or regional reliability Load shedding programs, but are offered as components of an ancillary services market do not qualify under this criterion.

The language used in section 4 for UVLS and UFLS and in criterion 2.10 of Attachment 1 is designed to be consistent with requirements set in the PRC standards for UFLS and UVLS.

- Criterion 2.12 categorizes as medium impact those BES Cyber Systems used by and at Control Centers and associated data centers performing the functional obligations of a Transmission Operator and that have not already been categorized as high impact.
- Criterion 2.13 categorizes as Medium Impact those BA Control Centers that “control” 1500 MW of generation or more in a single Interconnection. The 1500 MW threshold is consistent with the impact level and rationale specified for Criterion 2.1.

### **Low Impact Rating (L)**

BES Cyber Systems not categorized in high impact or medium impact default to low impact. Note that low impact BES Cyber Systems do not require discrete identification.

### **Restoration Facilities**

- Several discussions on the CIP Version 5 standards suggest entities owning Blackstart Resources and Cranking Paths might elect to remove those services to avoid higher compliance costs. For example, one Reliability Coordinator reported a 25% reduction of Blackstart Resources as a result of the Version 1 language, and there could be more entities that make this choice under Version 5.

In response, the CIP Version 5 drafting team sought informal input from NERC’s Operating and Planning Committees. The committees indicate there has already been a reduction in Blackstart Resources because of increased CIP compliance costs, environmental rules, and other risks; continued inclusion within Version 5 at a category that would very significantly increase compliance costs can result in further reduction of a vulnerable pool.

The drafting team moved from the categorization of restoration assets such as Blackstart Resources and Cranking Paths as medium impact (as was the case in earlier drafts) to categorization of these assets as low impact as a result of these considerations. This will not relieve asset owners of all responsibilities, as would have been the case in CIP-002, Versions 1-4 (since only Cyber Assets with routable connectivity which are essential to restoration assets are included in those versions). Under the low impact categorization, those assets will be protected in the areas of cyber security awareness, physical access control, and electronic access control, and they will have obligations regarding incident response. This represents a net gain to bulk power system reliability, however, since many of those assets do not meet criteria for inclusion under Versions 1-4.

Weighing the risks to overall BES reliability, the drafting team determined that this re-categorization represents the option that would be the least detrimental to restoration function and, thus, overall BES reliability. Removing Blackstart Resources and Cranking Paths from medium impact promotes overall reliability, as the likely alternative is fewer Blackstart Resources supporting timely restoration when needed.

BES Cyber Systems for generation resources that have been designated as Blackstart Resources in the Transmission Operator's restoration plan default to low impact. NERC Standard EOP-005-2 requires the Transmission Operator to have a Restoration Plan and to list its Blackstart Resources in its plan, as well as requirements to test these Resources. This criterion designates only those generation Blackstart Resources that have been designated as such in the Transmission Operator's restoration plan. The glossary term Blackstart Capability Plan has been retired.

Regarding concerns of communication to BES Asset Owners and Operators of their role in the Restoration Plan, Transmission Operators are required in NERC Standard EOP-005-2 to "provide the entities identified in its approved restoration plan with a description of any changes to their roles and specific tasks prior to the implementation date of the plan."

- BES Cyber Systems for Facilities and Elements comprising the Cranking Paths and meeting the initial switching requirements from the Blackstart Resource to the first Interconnection point of the generation unit(s) to be started, as identified in the Transmission Operator's restoration plan, default to the category of low impact: however, these systems are explicitly called out to ensure consideration for inclusion in the scope of the version 5 CIP standards. This requirement for inclusion in the scope is sourced from requirements in NERC standard EOP-005-2, which requires the Transmission Operator to include in its Restoration Plan the Cranking Paths and initial switching requirements from the Blackstart Resource and the unit(s) to be started.


Distribution Providers may note that they may have BES Cyber Systems that must be scoped in if they have Elements listed in the Transmission Operator's Restoration Plan that are components of the Cranking Path.



**Use Case: CIP Process Flow**

The following CIP use case process flow for a generator Operator/Owner was provided by a participant in the development of the Version 5 standards and is provided here as an example of a process used to identify and categorize BES Cyber Systems and BES Cyber Assets; review, develop, and implement strategies to mitigate overall risks; and apply applicable security controls.

**Overview (Generation Facility)**

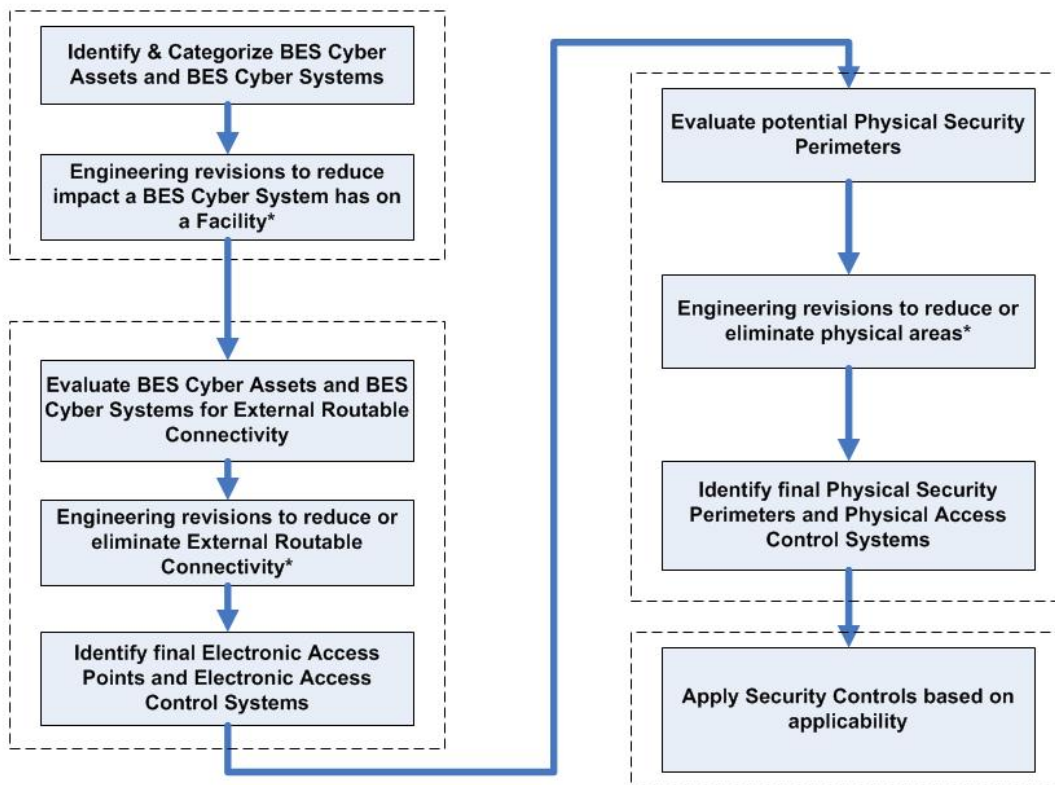

\* - Engineering revisions will need to be reviewed for cost justification, operational/safety requirements, support requirements, and technical limitations.

**Rationale:**

During development of this standard, text boxes were embedded within the standard to explain the rationale for various parts of the standard. Upon BOT approval, the text from the rationale text boxes was moved to this section.

**Rationale for R1:**

BES Cyber Systems at each site location have varying impact on the reliable operation of the Bulk Electric System. Attachment 1 provides a set of “bright-line” criteria that the Responsible Entity must use to identify these BES Cyber Systems in accordance with the impact on the BES. BES Cyber Systems must be identified and categorized according to their impact so that the appropriate measures can be applied, commensurate with their impact. These impact categories will be the basis for the application of appropriate requirements in CIP-003-CIP-011.

**Rationale for R2:**

The lists required by Requirement R1 are reviewed on a periodic basis to ensure that all BES Cyber Systems required to be categorized have been properly identified and categorized. The miscategorization or non-categorization of a BES Cyber System can lead to the application of inadequate or non-existent cyber security controls that can lead to compromise or misuse that can affect the real-time operation of the BES. The CIP Senior Manager’s approval ensures proper oversight of the process by the appropriate Responsible Entity personnel.

**Version History**

Version	Date	Action	Change Tracking
1	1/16/06	R3.2 — Change “Control Center” to “control center.”	3/24/06
2	9/30/09	Modifications to clarify the requirements and to bring the compliance elements into conformance with the latest guidelines for developing compliance elements of standards. Removal of reasonable business judgment. Replaced the RRO with the RE as a Responsible Entity. Rewording of Effective Date. Changed compliance monitor to Compliance Enforcement Authority.	
3	12/16/09	Updated version number from -2 to -3.	Update

## Guidelines and Technical Basis

---

		Approved by the NERC Board of Trustees.	
3	3/31/10	Approved by FERC.	
4	12/30/10	Modified to add specific criteria for Critical Asset identification.	Update
4	1/24/11	Approved by the NERC Board of Trustees.	Update
5	11/26/12	Adopted by the NERC Board of Trustees.	Modified to coordinate with other CIP standards and to revise format to use RBS Template.
5.1	9/30/13	Replaced "Devices" with "Systems" in a definition in background section.	Errata
5.1	11/22/13	FERC Order issued approving CIP-002-5.1.	
5.1a	11/02/16	Adopted by the NERC Board of Trustees.	

**Appendix 1**

**Requirement Number and Text of Requirement**

CIP-002-5.1, Requirement R1

R1. Each Responsible Entity shall implement a process that considers each of the following assets for purposes of parts 1.1 through 1.3:

- i. Control Centers and backup Control Centers;
- ii. Transmission stations and substations;
- iii. Generation resources;
- iv. Systems and facilities critical to system restoration, including Blackstart Resources and Cranking Paths and initial switching requirements;
- v. Special Protection Systems that support the reliable operation of the Bulk Electric System; and
- vi. For Distribution Providers, Protection Systems specified in Applicability section 4.2.1 above.

- 1.1. Identify each of the high impact BES Cyber Systems according to Attachment 1, Section 1, if any, at each asset;
- 1.2. Identify each of the medium impact BES Cyber Systems according to Attachment 1, Section 2, if any, at each asset; and
- 1.3. Identify each asset that contains a low impact BES Cyber System according to Attachment 1, Section 3, if any (a discrete list of low impact BES Cyber Systems is not required).

Attachment 1, Criterion 2.1

2. Medium Impact Rating (M)

Each BES Cyber System, not included in Section 1 above, associated with any of the following:

- 2.1. Commissioned generation, by each group of generating units at a single plant location, with an aggregate highest rated net Real Power capability of the preceding 12 calendar months equal to or exceeding 1500 MW in a single Interconnection. For each group of generating units, the only BES Cyber Systems that meet this criterion are those shared BES Cyber Systems that could, within 15 minutes, adversely impact the reliable operation of any combination of units that in aggregate equal or exceed 1500 MW in a single Interconnection.

Questions
<p>Energy Sector Security Consortium, Inc. (EnergySec) submitted a Request for Interpretation (RFI) seeking clarification of Criterion 2.1 of Attachment 1 in Reliability Standard CIP-002-5.1 regarding the use of the phrase “shared BES Cyber Systems.”</p> <p>The Interpretation Drafting Team identified the following questions in the RFI:</p> <ol style="list-style-type: none"><li>1. Whether the phrase “shared BES Cyber Systems” means that the evaluation for Criterion 2.1 shall be performed individually for each discrete BES Cyber System at a single plant location, or collectively for groups of BES Cyber Systems?</li><li>2. Whether the phrase “shared BES Cyber Systems” refers to discrete BES Cyber Systems that are shared by multiple units, or groups of BES Cyber Systems that could collectively impact multiple units?</li><li>3. If the phrase applies collectively to groups of BES Cyber Systems, what criteria should be used to determine which BES Cyber Systems should be grouped for collective evaluation?</li></ol>
Responses
<p><b>Question 1: Whether the phrase “shared BES Cyber Systems,” means that the evaluation for Criterion 2.1 shall be performed individually for each discrete BES Cyber System at a single plant location, or collectively for groups of BES Cyber Systems?</b></p> <p>The evaluation as to whether a BES Cyber System is shared should be performed individually for each discrete BES Cyber System. In the standard language of CIP-002-5.1, there is no reference to or obligation to group BES Cyber Systems. Requirement R1, part 1.2 states “Identify <i>each</i> of the medium impact BES Cyber Systems according to Attachment 1, Section 2...” Further, the preamble of Section 2 of CIP-002-5.1 Attachment 1 states “<i>Each BES Cyber System...associated with any of the following [criteria].</i>” (emphasis added)</p> <p>Additionally, the Background section of CIP-002-5.1 states that “[i]t is left up to the Responsible Entity to determine the level of granularity at which to identify a BES Cyber System within the qualifications in the definition of BES Cyber System.” The Background section also provides:</p> <p>The Responsible Entity should take into consideration the operational environment and scope of management when defining the BES Cyber System boundary in order to maximize efficiency in secure operations. Defining the boundary too tightly may result in redundant paperwork and authorizations, while defining the boundary too broadly could make the secure operation of the BES Cyber System difficult to monitor and assess.</p>

**Question 2: Whether the phrase “shared BES Cyber Systems” refers to discrete BES Cyber Systems that are shared by multiple units, or groups of BES Cyber Systems that could collectively impact multiple units?**

The phrase “shared BES Cyber Systems” refers to discrete BES Cyber Systems that are shared by multiple generation units.

The use of the term “shared” is also clarified in the NERC Frequently Asked Questions (FAQ) document issued by NERC Compliance to support implementation of the CIP Reliability Standards. FAQ #49 provides:

Shared BES Cyber Systems are those that are associated with any combination of units in a single Interconnection, as referenced in CIP-002-5.1, Attachment 1, impact rating criteria 2.1 and 2.2. For criterion 2.1 “BES Cyber Systems that could, within 15 minutes, adversely impact the reliable operation of any combination of units that in aggregate equal or exceed 1500 MW in a single Interconnection.” For criterion 2.2: “BES Cyber Systems that could, within 15 minutes, adversely impact the reliable operation of any combination of resources that in aggregate equal or exceed 1000 MVAR. Also refer to the Lesson Learned for CIP-002-5.1 Requirement R1: **Impact Rating of Generation Resource Shared BES Cyber Systems** for further information and examples.

**Question 3: If the phrase applies collectively to groups of BES Cyber Systems, what criteria should be used to determine which BES Cyber Systems should be grouped for collective evaluation?**

The phrase applies to each discrete BES Cyber System.

**\* FOR INFORMATIONAL PURPOSES ONLY \***

**Enforcement Dates: Standard CIP-002-5.1a — Cyber Security — BES Cyber System  
Categorization**

**United States**

Standard	Requirement	Enforcement Date	Inactive Date
----------	-------------	------------------	---------------

This standard has not yet been approved by the applicable regulatory authority.

**Reliability Standard COM-001-3**



## A. Introduction

1. **Title:** Communications
2. **Number:** COM-001-3
3. **Purpose:** To establish Interpersonal Communication capabilities necessary to maintain reliability.
4. **Applicability:**
  - 4.1. **Functional Entities:**
    - 4.1.1. Transmission Operator
    - 4.1.2. Balancing Authority
    - 4.1.3. Reliability Coordinator
    - 4.1.4. Distribution Provider
    - 4.1.5. Generator Operator
5. **Effective Date:** See Implementation Plan

## B. Requirements and Measures

- R1. Each Reliability Coordinator shall have Interpersonal Communication capability with the following entities (unless the Reliability Coordinator detects a failure of its Interpersonal Communication capability in which case Requirement R10 shall apply): *[Violation Risk Factor: High] [Time Horizon: Real-time Operations]*
  - 1.1. All Transmission Operators and Balancing Authorities within its Reliability Coordinator Area.
  - 1.2. Each adjacent Reliability Coordinator within the same Interconnection.
- M1. Each Reliability Coordinator shall have and provide upon request evidence that it has Interpersonal Communication capability with all Transmission Operators and Balancing Authorities within its Reliability Coordinator Area and with each adjacent Reliability Coordinator within the same Interconnection, which could include, but is not limited to:
  - physical assets, or
  - dated evidence, such as, equipment specifications and installation documentation, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R1.)
- R2. Each Reliability Coordinator shall designate an Alternative Interpersonal Communication capability with the following entities: *[Violation Risk Factor: High] [Time Horizon: Real-time Operations]*

- 2.1. All Transmission Operators and Balancing Authorities within its Reliability Coordinator Area.
      - 2.2. Each adjacent Reliability Coordinator within the same Interconnection.
- M2. Each Reliability Coordinator shall have and provide upon request evidence that it designated an Alternative Interpersonal Communication capability with all Transmission Operators and Balancing Authorities within its Reliability Coordinator Area and with each adjacent Reliability Coordinator within the same Interconnection, which could include, but is not limited to:
  - physical assets, or
  - dated evidence, such as, equipment specifications and installation documentation, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R2.)
- R3. Each Transmission Operator shall have Interpersonal Communication capability with the following entities (unless the Transmission Operator detects a failure of its Interpersonal Communication capability in which case Requirement R10 shall apply): *[Violation Risk Factor: High] [Time Horizon: Real-time Operations]*
  - 3.1. Its Reliability Coordinator.
  - 3.2. Each Balancing Authority within its Transmission Operator Area.
  - 3.3. Each Distribution Provider within its Transmission Operator Area.
  - 3.4. Each Generator Operator within its Transmission Operator Area.
  - 3.5. Each adjacent Transmission Operator synchronously connected.
  - 3.6. Each adjacent Transmission Operator asynchronously connected.
- M3. Each Transmission Operator shall have and provide upon request evidence that it has Interpersonal Communication capability with its Reliability Coordinator, each Balancing Authority, Distribution Provider, and Generator Operator within its Transmission Operator Area, and each adjacent Transmission Operator asynchronously or synchronously connected, which could include, but is not limited to:
  - Physical assets, or
  - Dated evidence, such as, equipment specifications and installation documentation, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communication. (R3.)
- R4. Each Transmission Operator shall designate an Alternative Interpersonal Communication capability with the following entities: *[Violation Risk Factor: High] [Time Horizon: Real-time Operations]*
  - 4.1. Its Reliability Coordinator.

- 4.2. Each Balancing Authority within its Transmission Operator Area.
  - 4.3. Each adjacent Transmission Operator synchronously connected.
  - 4.4. Each adjacent Transmission Operator asynchronously connected.
- M4.** Each Transmission Operator shall have and provide upon request evidence that it designated an Alternative Interpersonal Communication capability with its Reliability Coordinator, each Balancing Authority within its Transmission Operator Area, and each adjacent Transmission Operator asynchronously and synchronously connected, which could include, but is not limited to:
- Physical assets, or
  - Dated evidence, such as, equipment specifications and installation documentation, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R4.)
- R5.** Each Balancing Authority shall have Interpersonal Communication capability with the following entities (unless the Balancing Authority detects a failure of its Interpersonal Communication capability in which case Requirement R10 shall apply): *[Violation Risk Factor: High] [Time Horizon: Real-time Operations]*
- 5.1. Its Reliability Coordinator.
  - 5.2. Each Transmission Operator that operates Facilities within its Balancing Authority Area.
  - 5.3. Each Distribution Provider within its Balancing Authority Area.
  - 5.4. Each Generator Operator that operates Facilities within its Balancing Authority Area.
  - 5.5. Each Adjacent Balancing Authority.
- M5.** Each Balancing Authority shall have and provide upon request evidence that it has Interpersonal Communication capability with its Reliability Coordinator, each Transmission Operator and Generator Operator that operates Facilities within its Balancing Authority Area, each Distribution Provider within its Balancing Authority Area, and each adjacent Balancing Authority, which could include, but is not limited to:
- Physical assets, or
  - Dated evidence, such as, equipment specifications and installation documentation, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R5.)

- R6.** Each Balancing Authority shall designate an Alternative Interpersonal Communication capability with the following entities: *[Violation Risk Factor: High] [Time Horizon: Real-time Operations]*
- 6.1.** Its Reliability Coordinator.
  - 6.2.** Each Transmission Operator that operates Facilities within its Balancing Authority Area.
  - 6.3.** Each Adjacent Balancing Authority.
- M6.** Each Balancing Authority shall have and provide upon request evidence that it designated an Alternative Interpersonal Communication capability with its Reliability Coordinator, each Transmission Operator that operates Facilities within its Balancing Authority Area, and each adjacent Balancing Authority, which could include, but is not limited to:
- Physical assets, or
  - Dated evidence, such as, equipment specifications and installation documentation, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R6.)
- R7.** Each Distribution Provider shall have Interpersonal Communication capability with the following entities (unless the Distribution Provider detects a failure of its Interpersonal Communication capability in which case Requirement R11 shall apply): *[Violation Risk Factor: Medium] [Time Horizon: Real-time Operations]*
- 7.1.** Its Balancing Authority.
  - 7.2.** Its Transmission Operator.
- M7.** Each Distribution Provider shall have and provide upon request evidence that it has Interpersonal Communication capability with its Transmission Operator and its Balancing Authority, which could include, but is not limited to:
- Physical assets, or
  - Dated evidence, such as, equipment specifications and installation documentation, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R7.)
- R8.** Each Generator Operator shall have Interpersonal Communication capability with the following entities (unless the Generator Operator detects a failure of its Interpersonal Communication capability in which case Requirement R11 shall apply): *[Violation Risk Factor: High] [Time Horizon: Real-time Operations]*
- 8.1.** Its Balancing Authority.
  - 8.2.** Its Transmission Operator.

- M8.** Each Generator Operator shall have and provide upon request evidence that it has Interpersonal Communication capability with its Balancing Authority and its Transmission Operator, which could include, but is not limited to:
- Physical assets, or
  - Dated evidence, such as, equipment specifications and installation documentation, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R8.)
- R9.** Each Reliability Coordinator, Transmission Operator, and Balancing Authority shall test its Alternative Interpersonal Communication capability at least once each calendar month. If the test is unsuccessful, the responsible entity shall initiate action to repair or designate a replacement Alternative Interpersonal Communication capability within 2 hours. *[Violation Risk Factor: Medium][Time Horizon: Real-time Operations, Same-day Operations]*
- M9.** Each Reliability Coordinator, Transmission Operator, and Balancing Authority shall have and provide upon request evidence that it tested, at least once each calendar month, its Alternative Interpersonal Communication capability designated in Requirements R2, R4, or R6. If the test was unsuccessful, the entity shall have and provide upon request evidence that it initiated action to repair or designated a replacement Alternative Interpersonal Communication capability within 2 hours. Evidence could include, but is not limited to: dated and time-stamped test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R9.)
- R10.** Each Reliability Coordinator, Transmission Operator, and Balancing Authority shall notify entities as identified in Requirements R1, R3, and R5, respectively within 60 minutes of the detection of a failure of its Interpersonal Communication capability that lasts 30 minutes or longer. *[Violation Risk Factor: Medium] [Time Horizon: Real-time Operations]*
- M10.** Each Reliability Coordinator, Transmission Operator, and Balancing Authority shall have and provide upon request evidence that it notified entities as identified in Requirements R1, R3, and R5, respectively within 60 minutes of the detection of a failure of its Interpersonal Communication capability that lasted 30 minutes or longer. Evidence could include, but is not limited to: dated and time-stamped test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R10.)
- R11.** Each Distribution Provider and Generator Operator that detects a failure of its Interpersonal Communication capability shall consult each entity affected by the failure, as identified in Requirement R7 for a Distribution Provider or Requirement R8 for a Generator Operator, to determine a mutually agreeable action for the

restoration of its Interpersonal Communication capability. *[Violation Risk Factor: Medium] [Time Horizon: Real-time Operations]*

- M11.** Each Distribution Provider and Generator Operator that detected a failure of its Interpersonal Communication capability shall have and provide upon request evidence that it consulted with each entity affected by the failure, as identified in Requirement R7 for a Distribution Provider or Requirement R8 for a Generator Operator, to determine mutually agreeable action to restore the Interpersonal Communication capability. Evidence could include, but is not limited to: dated operator logs, voice recordings, transcripts of voice recordings, or electronic communications. (R11.)
- R12.** Each Reliability Coordinator, Transmission Operator, Generator Operator, and Balancing Authority shall have internal Interpersonal Communication capabilities for the exchange of information necessary for the Reliable Operation of the BES. This includes communication capabilities between Control Centers within the same functional entity, and/or between a Control Center and field personnel. *[Violation Risk Factor: High] [Time Horizon: Real-time Operations]*
- M12.** Each Reliability Coordinator, Transmission Operator, Generator Operator, and Balancing Authority shall have and provide upon request evidence that it has internal Interpersonal Communication capability, which could include, but is not limited to:
- physical assets, or
  - dated evidence, such as, equipment specifications and installation documentation, operating procedures, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications.
- R13.** Each Distribution Provider shall have internal Interpersonal Communication capabilities for the exchange of information necessary for the Reliable Operation of the BES. This includes communication capabilities between control centers within the same functional entity, and/or between a control center and field personnel. *[Violation Risk Factor: Medium] [Time Horizon: Real-time Operations]*
- M13.** Each Distribution Provider shall have and provide upon request evidence that it has internal Interpersonal Communication capability, which could include, but is not limited to:
- physical assets, or
  - dated evidence, such as, equipment specifications and installation documentation, operating procedures, test records, operator logs, voice recordings, transcripts of voice recordings, or electronic communications.

## Compliance

### 1. Compliance Monitoring Process

#### 1.1. Compliance Enforcement Authority:

“Compliance Enforcement Authority” or the Regional Entity, or any entity as otherwise designated by an Applicable Governmental Authority, in their respective roles of monitoring and/or enforcing compliance with mandatory and enforceable Reliability Standards in their respective jurisdictions.

#### 1.2. Evidence Retention

The following evidence retention period(s) identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full-time period since the last audit.

The applicable entity shall keep data or evidence to show compliance as identified below unless directed by its Compliance Enforcement Authority to retain specific evidence for a longer period of time as part of an investigation:

- The Reliability Coordinator for Requirements R1, R2, R9, and R10, Measures M1, M2, M9, and M10 shall retain written documentation for the most recent twelve calendar months and voice recordings for the most recent 90 calendar days.
- The Transmission Operator for Requirements R3, R4, R9, and R10, Measures M3, M4, M9, and M10 shall retain written documentation for the most recent twelve calendar months and voice recordings for the most recent 90 calendar days.
- The Balancing Authority for Requirements R5, R6, R9, and R10, Measures M5, M6, M9, and M10 shall retain written documentation for the most recent twelve calendar months and voice recordings for the most recent 90 calendar days.
- The Distribution Provider for Requirements R7 and R11, Measures M7 and M11 shall retain written documentation for the most recent twelve calendar months and voice recordings for the most recent 90 calendar days.
- The Generator Operator for Requirements R8 and R11, Measures M8 and M11 shall retain written documentation for the most recent twelve calendar months and voice recordings for the most recent 90 calendar days.
- Responsible entities under Requirement R12, Measure M12 shall retain written documentation for the most recent twelve calendar months and voice recordings for the most recent 90 calendar days.

- Responsible entities under Requirement R13, Measure M13 shall retain written documentation for the most recent twelve calendar months and voice recordings for the most recent 90 calendar days.

**1.3. Compliance Monitoring and Enforcement Program**

As defined in the NERC Rules of Procedure, “Compliance Monitoring and Enforcement Program” refers to the identification of the processes that will be used to evaluate data or information for the purpose of assessing performance or outcomes with the associated Reliability Standard.



Violation Severity Levels

R #	Violation Severity Levels			
	Lower VSL	Moderate VSL	High VSL	Severe VSL
<b>R1.</b>	<b>N/A</b>	<b>N/A</b>	The Reliability Coordinator failed to have Interpersonal Communication capability with one of the entities listed in Requirement R1, Parts 1.1 or 1.2, except when the Reliability Coordinator detected a failure of its Interpersonal Communication capability in accordance with Requirement R10.	The Reliability Coordinator failed to have Interpersonal Communication capability with two or more of the entities listed in Requirement R1, Parts 1.1 or 1.2, except when the Reliability Coordinator detected a failure of its Interpersonal Communication capability in accordance with Requirement R10.
<b>R2.</b>	<b>N/A</b>	<b>N/A</b>	The Reliability Coordinator failed to designate Alternative Interpersonal Communication capability with one of the entities listed in Requirement R2, Parts 2.1 or 2.2.	The Reliability Coordinator failed to designate Alternative Interpersonal Communication capability with two or more of the entities listed in Requirement R2, Parts 2.1 or 2.2.
<b>R3.</b>	<b>N/A</b>	<b>N/A</b>	The Transmission Operator failed to have Interpersonal Communication capability	The Transmission Operator failed to have Interpersonal Communication capability

			with one of the entities listed in Requirement R3, Parts 3.1, 3.2, 3.3, 3.4, 3.5, or 3.6, except when the Transmission Operator detected a failure of its Interpersonal Communication capability in accordance with Requirement R10.	with two or more of the entities listed in Requirement R3, Parts 3.1, 3.2, 3.3, 3.4, 3.5, or 3.6, except when the Transmission Operator detected a failure of its Interpersonal Communication capability in accordance with Requirement R10.
<b>R4.</b>	<b>N/A</b>	<b>N/A</b>	The Transmission Operator failed to designate Alternative Interpersonal Communication capability with one of the entities listed in Requirement R4, Parts 4.1, 4.2, 4.3, or 4.4.	The Transmission Operator failed to designate Alternative Interpersonal Communication capability with two or more of the entities listed in Requirement R4, Parts 4.1, 4.2, 4.3, or 4.4.
<b>R5.</b>	<b>N/A</b>	<b>N/A</b>	The Balancing Authority failed to have Interpersonal Communication capability with one of the entities listed in Requirement R5, Parts 5.1, 5.2, 5.3, 5.4, or 5.5, except when the Balancing Authority detected a failure of its Interpersonal Communication capability in	The Balancing Authority failed to have Interpersonal Communication capability with two or more of the entities listed in Requirement R5, Parts 5.1, 5.2, 5.3, 5.4, or 5.5, except when the Balancing Authority detected a failure of its Interpersonal Communication capability in

			accordance with Requirement R10.	accordance with Requirement R10.
<b>R6.</b>	<b>N/A</b>	<b>N/A</b>	The Balancing Authority failed to designate Alternative Interpersonal Communication capability with one of the entities listed in Requirement R6, Parts 6.1, 6.2, or 6.3.	The Balancing Authority failed to designate Alternative Interpersonal Communication capability with two or more of the entities listed in Requirement R6, Parts 6.1, 6.2, or 6.3.
<b>R7.</b>	<b>N/A</b>	<b>N/A</b>	The Distribution Provider failed to have Interpersonal Communication capability with one of the entities listed in Requirement R7, Parts 7.1 or 7.2, except when the Distribution Provider detected a failure of its Interpersonal Communication capability in accordance with Requirement R11.	The Distribution Provider failed to have Interpersonal Communication capability with two or more of the entities listed in Requirement R7, Parts 7.1 or 7.2, except when the Distribution Provider detected a failure of its Interpersonal Communication capability in accordance with Requirement R11.
<b>R8.</b>	<b>N/A</b>	<b>N/A</b>	The Generator Operator failed to have Interpersonal Communication capability with one of the entities listed in Requirement R8, Parts 8.1 or 8.2, except when	The Generator Operator failed to have Interpersonal Communication capability with two or more of the entities listed in Requirement R8, Parts 8.1 or

			a Generator Operator detected a failure of its Interpersonal Communication capability in accordance with Requirement R11.	8.2, except when a Generator Operator detected a failure of its Interpersonal Communication capability in accordance with Requirement R11.
<b>R9.</b>	The Reliability Coordinator, Transmission Operator, or Balancing Authority tested the Alternative Interpersonal Communication capability but failed to initiate action to repair or designate a replacement Alternative Interpersonal Communication in more than 2 hours and less than or equal to 4 hours upon an unsuccessful test.	The Reliability Coordinator, Transmission Operator, or Balancing Authority tested the Alternative Interpersonal Communication capability but failed to initiate action to repair or designate a replacement Alternative Interpersonal Communication in more than 4 hours and less than or equal to 6 hours upon an unsuccessful test.	The Reliability Coordinator, Transmission Operator, or Balancing Authority tested the Alternative Interpersonal Communication capability but failed to initiate action to repair or designate a replacement Alternative Interpersonal Communication in more than 6 hours and less than or equal to 8 hours upon an unsuccessful test.	The Reliability Coordinator, Transmission Operator, or Balancing Authority failed to test the Alternative Interpersonal Communication capability once each calendar month.  OR The Reliability Coordinator, Transmission Operator, or Balancing Authority tested the Alternative Interpersonal Communication capability but failed to initiate action to repair or designate a replacement Alternative Interpersonal Communication in more than 8 hours upon an unsuccessful test.
<b>R10.</b>	The Reliability Coordinator, Transmission Operator, or	The Reliability Coordinator, Transmission Operator, or	The Reliability Coordinator, Transmission Operator, or	The Reliability Coordinator, Transmission Operator, or

	Balancing Authority failed to notify the entities identified in Requirements R1, R3, and R5, respectively upon the detection of a failure of its Interpersonal Communication capability in more than 60 minutes but less than or equal to 70 minutes.	Balancing Authority failed to notify the entities identified in Requirements R1, R3, and R5, respectively upon the detection of a failure of its Interpersonal Communication capability in more than 70 minutes but less than or equal to 80 minutes.	Balancing Authority failed to notify the entities identified in Requirements R1, R3, and R5, respectively upon the detection of a failure of its Interpersonal Communication capability in more than 80 minutes but less than or equal to 90 minutes.	Balancing Authority failed to notify the entities identified in Requirements R1, R3, and R5, respectively upon the detection of a failure of its Interpersonal Communication capability in more than 90 minutes.
<b>R11.</b>	<b>N/A</b>	<b>N/A</b>	<b>N/A</b>	The Distribution Provider or Generator Operator that detected a failure of its Interpersonal Communication capability failed to consult with each entity affected by the failure, as identified in Requirement R7 for a Distribution Provider or Requirement R8 for a Generator Operator, to determine a mutually agreeable action for the restoration of the Interpersonal Communication capability.
<b>R12.</b>	<b>N/A</b>	<b>N/A</b>	<b>N/A</b>	The Reliability Coordinator, Transmission Operator, Generator Operator, or Balancing Authority failed to

				have internal Interpersonal Communication capability for the exchange of operating information.
<b>R13.</b>	<b>N/A</b>	<b>N/A</b>	<b>N/A</b>	The Distribution Provider failed to have internal Interpersonal Communication capability for the exchange of operating information.

**Regional Variances**

None.

**Associated Documents**

None.

## Version History

Version	Date	Action	Change Tracking
0	April 1, 2005	Effective Date	New
0	August 8, 2005	Removed "Proposed" from Effective Date	Errata
1	November 1, 2006	Adopted by Board of Trustees	Revised
1	April 4, 2007	Regulatory Approval — Effective Date	New
1	April 6, 2007	Requirement 1, added the word "for" between "facilities" and "the exchange."	Errata
1.1	October 29, 2008	BOT adopted errata changes; updated version number to "1.1"	Errata
2	November 7, 2012	Adopted by Board of Trustees	Revised in accordance with SAR for Project 2006-06, Reliability Coordination (RC SDT). Replaced R1 with R1-R8; R2 replaced by R9; R3 included within new R1; R4 remains enforce pending Project 2007-02; R5 redundant with EOP-008-0, retiring R5 as redundant with EOP-008-0, R1; retiring R6, relates to ERO procedures; R10 & R11, new.
2	April 16, 2015	FERC Order issued approving COM-001-2	
2.1	August 25, 2015	Changed numbered parts under	2.1
2.1	November 13, 2015	FERC Order issued approving errata to COM-001-2.1	Errata to correct inadvertent numbering errors in the parts to Requirement R6.

**COM-001-3 Communications**

---

3	August 11, 2016	Adopted by the NERC Board of Trustees	New
3	October 28, 2016	FERC letter Order issued approving COM-001-3. Docket No. RD16-9-000.	



### Rationale

#### **Rationale for Requirement R12:**

The focus of the requirement is on the *capabilities* that an entity must have for the purpose of exchanging information necessary for the Reliable Operation of the BES. That is, the entity must have the capability to communicate internally by, “any medium that allows two or more individuals to interact, consult, or exchange information.” The standard does not prescribe the specific type of capability (*i.e.*, hardware or software). The determination of the appropriate type of capability is left to the entity. Regardless, the entity must have the capability to exchange information *whenever* the internal Interpersonal Communications may directly impact operations of the BES. Therefore, the applicable entities must have the capability to exchange information between Control Centers of that functional entity. For example, a TOP with multiple control centers that are geographical separated must have the capability to communicate internally between or among those control centers. The communication capability may occur through any medium that supports Interpersonal Communication, such as land line telephone, cellular device, Voice Over Internet Protocol (VOIP), satellite telephone, radio, or electronic message. Also, applicable entities must have the capability to exchange information between a Control Center and field personnel. For example, a TOP system operator providing instruction to a field personnel to perform a reliability activity, such as switching Facilities.

In the course of normal control center operation, system operators within a single Control Center communicate as needed to ensure the reliability of the BES, including face-to-face communications. These internal communications are ongoing and occur throughout the day as part of day-to-day operations. However, these types of communications are not the focus of this requirement. The focus is on the capability of an entity to communicate internally where face-to-face communications are not available.

#### **Rationale for Requirement R13:**

The NERC Glossary definition for “Control Center” was not used in this requirement because Distribution Provider is not listed as an entity within the definition. The Glossary definition for “Control Center” is, “[o]ne or more facilities hosting operating personnel that monitor and control the Bulk Electric System (BES) in real-time to perform the reliability tasks, including their associated data centers, of: 1) a Reliability Coordinator, 2) a Balancing Authority, 3) a Transmission Operator for transmission Facilities at two or more locations, or 4) a Generator Operator for generation Facilities at two or more locations.” Therefore in this requirement, control center is intended to mean the Distribution Provider facilities hosting operating personnel performing the operational functions of the Distribution Provider that are necessary for the Reliable Operation of the BES, often referred to as a distribution control center, or distribution center. Examples of Distribution Providers exchanging information necessary for the Reliable Operation of the BES include Distribution Providers included in restoration plans, load shed plans, load reconfiguration, and voltage control plans. The Distribution Provider must have the capability to exchange information *whenever* the internal Interpersonal Communications may directly impact operations of the BES. Therefore, the Distribution

## Supplemental Material

---

Provider must have the capability to exchange information between control centers as necessary. For example, a Distribution Provider with multiple control centers that are geographical separated, where face-to-face communications are not available, must have the capability to communicate internally between or among those control centers.

**\* FOR INFORMATIONAL PURPOSES ONLY \***

**Enforcement Dates: Standard COM-001-3 — Communications**

**United States**

<b>Standard</b>	<b>Requirement</b>	<b>Enforcement Date</b>	<b>Inactive Date</b>
COM-001-3	All	10/01/2017	

**Exhibit B: List of Currently-Effective NERC Reliability Standards**

## Exhibit B: List of Currently Effective NERC Reliability Standards in Fourth Quarter 2016

### Resource and Demand Balancing (BAL)

BAL-001-TRE-1	<a href="#">Primary Frequency Response in the ERCOT Region</a>
BAL-002-1	<a href="#">Disturbance Control Performance</a>
BAL-002-WECC-2	<a href="#">Contingency Reserve</a>
BAL-003-1.1	<a href="#">Frequency Response and Frequency Bias Setting</a>
BAL-004-0	<a href="#">Time Error Correction</a>
BAL-004-WECC-02	<a href="#">Automatic Time Error Correction (ATEC)</a>
BAL-005-0.2b	<a href="#">Automatic Generation Control</a>
BAL-006-2	<a href="#">Inadvertent Interchange</a>
BAL-502-RFC-02	<a href="#">Planning Resource Adequacy Analysis, Assessment and Documentation</a>

### Communications (COM)

COM-001-2.1	<a href="#">Communications</a>
COM-002-4	<a href="#">Operating Personnel Communications Protocols</a>

### Critical Infrastructure Protection (CIP)

CIP-002.5.1a	<a href="#">Cyber Security — BES Cyber System Categorization</a>
CIP-003-6	<a href="#">Cyber Security — Security Management Controls</a>
CIP-004-6	<a href="#">Cyber Security — Personnel &amp; Training</a>
CIP-005-5	<a href="#">Cyber Security — Electronic Security Perimeter(s)</a>
CIP-006-6	<a href="#">Cyber Security — Physical Security of BES Cyber Systems</a>
CIP-007-6	<a href="#">Cyber Security — System Security Management</a>
CIP-008-5	<a href="#">Cyber Security — Incident Reporting and Response Planning</a>
CIP-009-6	<a href="#">Cyber Security — Recovery Plans for BES Cyber Systems</a>
CIP-010-2	<a href="#">Cyber Security — Configuration Change Management and Vulnerability Assessments</a>
CIP-011-2	<a href="#">Cyber Security — Information Protection</a>
CIP-014-2	<a href="#">Physical Security</a>

### Emergency Preparedness and Operations (EOP)

EOP-001-2.1b	<a href="#">Emergency Operations Planning</a>
EOP-002-3.1	<a href="#">Capacity and Energy Emergencies</a>
EOP-003-2	<a href="#">Load Shedding Plans</a>
EOP-004-2	<a href="#">Event Reporting</a>
EOP-005-2	<a href="#">System Restoration from Blackstart Resources</a>
EOP-006-2	<a href="#">System Restoration Coordination</a>

## Exhibit B: List of Currently Effective NERC Reliability Standards in Fourth Quarter 2016

EOP-008-1	<a href="#">Loss of Control Center Functionality</a>
EOP-010-1	<a href="#">Geomagnetic Disturbance Operations</a>
<b>Facilities Design, Connections, and Maintenance (FAC )</b>	
FAC-001-2	<a href="#">Facility Interconnection Requirements</a>
FAC-002-2	<a href="#">Facility Interconnection Studies</a>
FAC-003-4	<a href="#">Transmission Vegetation Management</a>
FAC-008-3	<a href="#">Facility Ratings</a>
FAC-010-2.1	<a href="#">System Operating Limits Methodology for the Planning Horizon</a>
FAC-011-2	<a href="#">System Operating Limits Methodology for the Operations Horizon</a>
FAC-013-2	<a href="#">Assessment of Transfer Capability for the Near-Term Transmission Planning Horizon</a>
FAC-014-2	<a href="#">Establish and Communicate System Operating Limits</a>
FAC-501-WECC-1	<a href="#">Transmission Maintenance</a>
<b>Interchange Scheduling and Coordination (INT)</b>	
INT-004-3.1	<a href="#">Dynamic Transfers</a>
INT-006-4	<a href="#">Evaluation of Interchange Transactions</a>
INT-009-2.1	<a href="#">Implementation of Interchange</a>
INT-010-2.1	<a href="#">Interchange Initiation and Modification for Reliability</a>
<b>Interconnection Reliability Operations and Coordination (IRO)</b>	
IRO-001-1.1	<a href="#">Reliability Coordination — Responsibilities and Authorities</a>
IRO-002-2	<a href="#">Reliability Coordination — Facilities</a>
IRO-003-2	<a href="#">Reliability Coordination — Wide-Area View</a>
IRO-004-2	<a href="#">Reliability Coordination — Operations Planning</a>
IRO-005-3.1a	<a href="#">Reliability Coordination — Current Day Operations</a>
IRO-006-5	<a href="#">Reliability Coordination — Transmission Loading Relief (TLR)</a>
IRO-006-EAST-2	<a href="#">Transmission Loading Relief Procedure for the Eastern Interconnection</a>
IRO-006-TRE-1	<a href="#">IROL and SOL Mitigation in the ERCOT Region</a>
IRO-006-WECC-2	<a href="#">Qualified Transfer Path Unscheduled Flow (USF) Relief</a>
IRO-008-1	<a href="#">Reliability Coordinator Operational Analyses and Real-time Assessments</a>
IRO-009-2	<a href="#">Reliability Coordinator Actions to Operate Within IROLs</a>
IRO-010-1a	<a href="#">Reliability Coordinator Data Specification and Collection</a>
IRO-010-2	<a href="#">Reliability Coordinator Data Specification and Collection</a>

## Exhibit B: List of Currently Effective NERC Reliability Standards in Fourth Quarter 2016

IRO-014-1	<a href="#">Procedures, Processes, or Plans to Support Coordination Between Reliability Coordinators</a>
IRO-015-1	<a href="#">Notifications and Information Exchange Between Reliability Coordinators</a>
IRO-016-1	<a href="#">Coordination of Real-time Activities Between Reliability Coordinators</a>

### Modeling, Data, and Analysis (MOD )

MOD-001-1a	<a href="#">Available Transmission System Capability</a>
MOD-004-1	<a href="#">Capacity Benefit Margin</a>
MOD-008-1	<a href="#">Transmission Reliability Margin Calculation Methodology</a>
MOD-020-0	<a href="#">Providing Interruptible Demands and Direct Control Load Management Data to System Operators and Reliability Coordinators</a>
MOD-025-2	<a href="#">Verification and Data Reporting of Generator Real and Reactive Power Capability and Synchronous Condenser Reactive Power Capability</a>
MOD-026-1	<a href="#">Verification of Models and Data for Generator Excitation Control System or Plant Volt/Var Control Functions</a>
MOD-027-1	<a href="#">Verification of Models and Data for Turbine/Governor and Load Control or Active Power/Frequency Control Functions</a>
MOD-028-2	<a href="#">Area Interchange Methodology</a>
MOD-029-1a	<a href="#">Rated System Path Methodology</a>
MOD-030-2	<a href="#">Flowgate Methodology</a>
MOD-031-2	<a href="#">Demand and Energy Data</a>
MOD-032-1	<a href="#">Data for Power System Modeling and Analysis</a>

### Nuclear (NUC)

NUC-001-3	<a href="#">Nuclear Plant Interface Coordination</a>
-----------	--

### Protection and Control (PRC)

PER-001-0.2	<a href="#">Operating Personnel Responsibility and Authority</a>
PER-003-1	<a href="#">Operating Personnel Credentials</a>
PER-004-2	<a href="#">Reliability Coordination — Staffing</a>
PER-005-2	<a href="#">Operations Personnel Training</a>
PRC-001-1.1(ii)	<a href="#">System Protection Coordination</a>
PRC-002-2	<a href="#">Disturbance Monitoring and Reporting Requirements</a>
PRC-004-4(i)	<a href="#">Protection System Misoperation Identification and Correction</a>
PRC-004-WECC-1	<a href="#">Protection System and Remedial Action Scheme Misoperation</a>
PRC-005-1.1b	<a href="#">Transmission and Generation Protection System Maintenance and Testing</a>

## Exhibit B: List of Currently Effective NERC Reliability Standards in Fourth Quarter 2016

PRC-005-6	<a href="#">Protection System, Automatic Reclosing, and Sudden Pressure Relaying Maintenance</a>
PRC-006-2	<a href="#">Automatic Underfrequency Load Shedding</a>
PRC-006-NPCC-1	<a href="#">Automatic Underfrequency Load Shedding</a>
PRC-006-SERC-01	<a href="#">Automatic Underfrequency Load Shedding Requirements</a>
PRC-008-0	<a href="#">Implementation and Documentation of Underfrequency Load Shedding Equipment Maintenance Program</a>
PRC-010-0	<a href="#">Technical Assessment of the Design and Effectiveness of Undervoltage Load Shedding Program</a>
PRC-011-0	<a href="#">Undervoltage Load Shedding System Maintenance and Testing</a>
PRC-015-0	<a href="#">Special Protection System Data and Documentation</a>
PRC-016-0.1	<a href="#">Special Protection System Misoperations</a>
PRC-017-0	<a href="#">Special Protection System Maintenance and Testing</a>
PRC-018-1	<a href="#">Disturbance Monitoring Equipment Installation and Data Reporting</a>
PRC-019-2	<a href="#">Coordination of Generating Unit or Plant Capabilities, Voltage Regulating Controls, and Protection</a>
PRC-021-1	<a href="#">Under-Voltage Load Shedding Program Data</a>
PRC-022-1	<a href="#">Under-Voltage Load Shedding Program Performance</a>
PRC-023-3	<a href="#">Transmission Relay Loadability</a>
PRC-024-2	<a href="#">Generator Frequency and Voltage Protective Relay Settings</a>
PRC-025-1	<a href="#">Generator Relay Loadability</a>

### Transmission Operations (TOP)

TOP-001-1a	<a href="#">Reliability Responsibilities and Authorities</a>
TOP-002-2.1b	<a href="#">Normal Operations Planning</a>
TOP-003-1	<a href="#">Planned Outage Coordination</a>
TOP-003-3	<a href="#">Operational Reliability Data</a>
TOP-004-2	<a href="#">Transmission Operations</a>
TOP-005-2a	<a href="#">Operational Reliability Information</a>
TOP-006-2	<a href="#">Monitoring System Conditions</a>
TOP-007-0	<a href="#">Reporting System Operating Limit (SOL) and Interconnection Reliability Operating Limit (IROL) Violations</a>
TOP-007-WECC-1a	<a href="#">System Operating Limits</a>
TOP-008-1	<a href="#">Response to Transmission Limit Violations</a>

### Transmission Planning (TPL)

TPL-001-4	<a href="#">Transmission System Planning Performance Requirements</a>
-----------	---



**Exhibit B: List of Currently Effective NERC Reliability Standards in Fourth Quarter 2016**

**Voltage and Reactive (VAR)**

- VAR-001-4.1 [Voltage and Reactive Control](#)
- VAR-002-4 [Generator Operation for Maintaining Network Voltage Schedules](#)
- VAR-002-WECC-2 [Automatic Voltage Regulators \(AVR\)](#)
- VAR-501-WECC-2 [Power System Stabilizer \(PSS\)](#)

**Exhibit C: Updated *Glossary of Terms Used in NERC Reliability Standards***

## Glossary of Terms Used in NERC Reliability Standards

Updated December 12, 2016

This Glossary lists each term that was defined for use in one or more of NERC's continent-wide or Regional Reliability Standards and adopted by the NERC Board of Trustees from February 8, 2005 through December 12, 2016.

This reference is divided into four sections, and each section is organized in alphabetical order:

**Subject to Enforcement**

**Pending Enforcement**

**Retired Terms**

**Regional Definitions**

The first three sections identify all terms that have been adopted by the NERC Board of Trustees for use in continent-wide standards; the Regional definitions section identifies all terms that have been adopted by the NERC Board of Trustees for use in regional standards.

Most of the terms identified in this glossary were adopted as part of the development of NERC's initial set of reliability standards, called the "Version 0" standards. Subsequent to the development of Version 0 standards, new definitions have been developed and approved following NERC's Reliability Standards Development Process, and added to this glossary following board adoption, with the "FERC effective" date added following a final Order approving the definition.

Any comments regarding this glossary should be reported to the following: [sarcomm@nerc.com](mailto:sarcomm@nerc.com) with "Glossary Comment" in the subject line.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Adequacy	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The ability of the electric system to supply the aggregate electrical demand and energy requirements of the end-use customers at all times, taking into account scheduled and reasonably expected unscheduled outages of system elements.
Adjacent Balancing Authority	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	A Balancing Authority whose Balancing Authority Area is interconnected with another Balancing Authority Area either directly or via a multi-party agreement or transmission tariff.
Adverse Reliability Impact	<a href="#">Coordinate Operations</a>		2/7/2006	3/16/2007		The impact of an event that results in frequency-related instability, unplanned tripping of load or generation; or uncontrolled separation or cascading outages that affects a widespread area of the interconnection.
After the Fact	<a href="#">Project 2007-14</a>	ATF	10/29/2008	12/17/2009		A time classification assigned to an RFI when the submittal time is greater than one hour after the start time of the RFI.
Agreement	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A contract or arrangement, either written or verbal and sometimes enforceable by law.
Alternative Interpersonal Communication	<a href="#">Project 2006-06</a>		11/7/2012	4/16/2015	10/1/2015	Any Interpersonal Communication that is able to serve as a substitute for, and does not utilize the same infrastructure (medium) as, Interpersonal Communication used for day-to-day operation.
Altitude Correction Factor	<a href="#">Project 2007-07</a>		2/7/2006	3/16/2007		A multiplier applied to specify distances, which adjusts the distances to account for the change in relative air density (RAD) due to altitude from the RAD used to determine the specified distance. Altitude correction factors apply to both minimum worker approach distances and to minimum vegetation clearance distances.
Ancillary Service	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Those services that are necessary to support the transmission of capacity and energy from resources to loads while maintaining reliable operation of the Transmission Service Provider's transmission system in accordance with good utility practice. (From FERC order 888-A.)
Anti-Aliasing Filter	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An analog filter installed at a metering point to remove the high frequency components of the signal over the AGC sample period.
Area Control Error	<a href="#">Version 0 Reliability Standards</a>	ACE	12/19/2012	10/16/2013	4/1/2014	The instantaneous difference between a Balancing Authority's net actual and scheduled interchange, taking into account the effects of Frequency Bias, correction for meter error, and Automatic Time Error Correction (ATEC), if operating in the ATEC mode. ATEC is only applicable to Balancing Authorities in the Western Interconnection.
Area Interchange Methodology	<a href="#">Project 2006-07</a>		8/22/2008	11/24/2009		The Area Interchange methodology is characterized by determination of incremental transfer capability via simulation, from which Total Transfer Capability (TTC) can be mathematically derived. Capacity Benefit Margin, Transmission Reliability Margin, and Existing Transmission Commitments are subtracted from the TTC, and Postbacks and counterflows are added, to derive Available Transfer Capability. Under the Area Interchange Methodology, TTC results are generally reported on an area to area basis.
Arranged Interchange	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	The state where a Request for Interchange (initial or revised) has been submitted for approval.
Attaining Balancing Authority	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	A Balancing Authority bringing generation or load into its effective control boundaries through a Dynamic Transfer from the Native Balancing Authority.
Automatic Generation Control	<a href="#">Version 0 Reliability Standards</a>	AGC	2/8/2005	3/16/2007		Equipment that automatically adjusts generation in a Balancing Authority Area from a central location to maintain the Balancing Authority's interchange schedule plus Frequency Bias. AGC may also accommodate automatic inadvertent payback and time error correction.
Available Flowgate Capability	<a href="#">Project 2006-07</a>	AFC	8/22/2008	11/24/2009		A measure of the flow capability remaining on a Flowgate for further commercial activity over and above already committed uses. It is defined as TFC less Existing Transmission Commitments (ETC), less a Capacity Benefit Margin, less a Transmission Reliability Margin, plus Postbacks, and plus counterflows.
Available Transfer Capability	<a href="#">Project 2006-07</a>	ATC	8/22/2008	11/24/2009		A measure of the transfer capability remaining in the physical transmission network for further commercial activity over and above already committed uses. It is defined as Total Transfer Capability less Existing Transmission Commitments (including retail customer service), less a Capacity Benefit Margin, less a Transmission Reliability Margin, plus Postbacks, plus counterflows.
Available Transfer Capability Implementation Document	<a href="#">Project 2006-07</a>	ATCID	8/22/2008	11/24/2009		A document that describes the implementation of a methodology for calculating ATC or AFC, and provides information related to a Transmission Service Provider's calculation of ATC or AFC.
Balancing Authority	<a href="#">Version 0 Reliability Standards</a>	BA	2/8/2005	3/16/2007		The responsible entity that integrates resource plans ahead of time, maintains load-interchange-generation balance within a Balancing Authority Area, and supports Interconnection frequency in real time.
Balancing Authority Area	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The collection of generation, transmission, and loads within the metered boundaries of the Balancing Authority. The Balancing Authority maintains load-resource balance within this area.
Base Load	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The minimum amount of electric power delivered or required over a given period at a constant rate.
BES Cyber Asset	<a href="#">Project 2008-06</a>	BCA	2/12/2015	1/21/2016	7/1/2016	A Cyber Asset that if rendered unavailable, degraded, or misused would, within 15 minutes of its required operation, misoperation, or non-operation, adversely impact one or more Facilities, systems, or equipment, which, if destroyed, degraded, or otherwise rendered unavailable when needed, would affect the reliable operation of the Bulk Electric System. Redundancy of affected Facilities, systems, and equipment shall not be considered when determining adverse impact. Each BES Cyber Asset is included in one or more BES Cyber Systems.
BES Cyber System	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	One or more BES Cyber Assets logically grouped by a responsible entity to perform one or more reliability tasks for a functional entity.
BES Cyber System Information	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	Information about the BES Cyber System that could be used to gain unauthorized access or pose a security threat to the BES Cyber System. BES Cyber System Information does not include individual pieces of information that by themselves do not pose a threat or could not be used to allow unauthorized access to BES Cyber Systems, such as, but not limited to, device names, individual IP addresses without context, ESP names, or policy statements. Examples of BES Cyber System Information may include, but are not limited to, security procedures or security information about BES Cyber Systems, Physical Access Control Systems, and Electronic Access Control or Monitoring Systems that is not publicly available and could be used to allow unauthorized access or unauthorized distribution; collections of network addresses; and network topology of the BES Cyber System.
Blackstart Resource	<a href="#">Project 2015-04</a>		11/5/2015	1/21/2016	7/1/2016	A generating unit(s) and its associated set of equipment which has the ability to be started without support from the System or is designed to remain energized without connection to the remainder of the System, with the ability to energize a bus, meeting the Transmission Operator's restoration plan needs for Real and Reactive Power capability, frequency and voltage control, and that has been included in the Transmission Operator's restoration plan.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Block Dispatch	<a href="#">Project 2006-07</a>		8/22/2008	11/24/2009		A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, the capacity of a given generator is segmented into loadable "blocks," each of which is grouped and ordered relative to other blocks (based on characteristics including, but not limited to, efficiency, run of river or fuel supply considerations, and/or "must-run" status).
Bulk Electric System (Continued below)	<a href="#">Project 2010-17</a>	BES	11/21/2013	3/20/2014	7/1/2014 (Please see the Implementation Plan for Phase 2 Compliance obligations.)	Unless modified by the lists shown below, all Transmission Elements operated at 100 kV or higher and Real Power and Reactive Power resources connected at 100 kV or higher. This does not include facilities used in the local distribution of electric energy. <b>Inclusions:</b> <ul style="list-style-type: none"> <li>• I1 - Transformers with the primary terminal and at least one secondary terminal operated at 100 kV or higher unless excluded by application of Exclusion E1 or E3.</li> <li>• I2 - Generating resource(s) including the generator terminals through the high-side of the step-up transformer(s) connected at a voltage of 100 kV or above with: <ul style="list-style-type: none"> <li>a) Gross individual nameplate rating greater than 20 MVA. Or,</li> <li>b) Gross plant/facility aggregate nameplate rating greater than 75 MVA.</li> </ul> </li> <li>• I3 - Blackstart Resources identified in the Transmission Operator's restoration plan.</li> <li>• I4 - Dispersed power producing resources that aggregate to a total capacity greater than 75 MVA (gross nameplate rating), and that are connected through a system designed primarily for delivering such capacity to a common point of connection at a voltage of 100 kV or above.</li> </ul> <p>Thus, the facilities designated as BES are:</p>
Bulk Electric System (continued below)	<a href="#">Project 2010-17</a>	BES	11/21/2013	3/20/2014	7/1/2014 (Please see the Implementation Plan for Phase 2 Compliance obligations.)	a) The individual resources, and b) The system designed primarily for delivering capacity from the point where those resources aggregate to greater than 75 MVA to a common point of connection at a voltage of 100 kV or above. <ul style="list-style-type: none"> <li>• I5 - Static or dynamic devices (excluding generators) dedicated to supplying or absorbing Reactive Power that are connected at 100 kV or higher, or through a dedicated transformer with a high-side voltage of 100 kV or higher, or through a transformer that is designated in Inclusion I1 unless excluded by application of Exclusion E4.</li> </ul> <b>Exclusions:</b> <ul style="list-style-type: none"> <li>• E1 - Radial systems: A group of contiguous transmission Elements that emanates from a single point of connection of 100 kV or higher and: <ul style="list-style-type: none"> <li>a) Only serves Load. Or,</li> <li>b) Only includes generation resources, not identified in Inclusions I2, I3, or I4, with an aggregate capacity less than or equal to 75 MVA (gross nameplate rating). Or,</li> <li>c) Where the radial system serves Load and includes generation resources, not identified in Inclusions I2, I3 or I4, with an aggregate capacity of non-retail generation less than or equal to 75 MVA (gross nameplate rating).</li> </ul> </li> </ul>
Bulk Electric System (continued)	<a href="#">Project 2010-17</a>	BES	11/21/2013	3/20/2014	7/1/2014 (Please see the Implementation Plan for Phase 2 Compliance obligations.)	Note 1 - A normally open switching device between radial systems, as depicted on prints or one-line diagrams for example, does not affect this exclusion. Note 2 - The presence of a contiguous loop, operated at a voltage level of 50 kV or less, between configurations being considered as radial systems, does not affect this exclusion. <ul style="list-style-type: none"> <li>• E2 - A generating unit or multiple generating units on the customer's side of the retail meter that serve all or part of the retail Load with electric energy if: (i) the net capacity provided to the BES does not exceed 75 MVA, and (ii) standby, back-up, and maintenance power services are provided to the generating unit or multiple generating units or to the retail Load by a Balancing Authority, or provided pursuant to a binding obligation with a Generator Owner or Generator Operator, or under terms approved by the applicable regulatory authority.</li> <li>• E3 - Local networks (LN): A group of contiguous transmission Elements operated at less than 300 kV that distribute power to Load rather than transfer bulk power across the interconnected system. LN's emanate from multiple points of connection at 100 kV or higher to improve the level of service to retail customers and not to accommodate bulk power transfer across the interconnected system. The LN is characterized by all of the following: <ul style="list-style-type: none"> <li>a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusions I2, I3, or I4 and do not have an aggregate capacity of non-retail</li> </ul> </li> </ul>
Bulk Electric System (continued)	<a href="#">Project 2010-17</a>	BES	11/21/2013	3/20/2014	7/1/2014 (Please see the Implementation Plan for Phase 2 Compliance obligations.)	generation greater than 75 MVA (gross nameplate rating); b) Real Power flows only into the LN and the LN does not transfer energy originating outside the LN for delivery through the LN; and c) Not part of a Flowgate or transfer path: The LN does not contain any part of a permanent Flowgate in the Eastern Interconnection, a major transfer path within the Western Interconnection, or a comparable monitored Facility in the ERCOT or Quebec Interconnections, and is not a monitored Facility included in an Interconnection Reliability Operating Limit (IROL). <ul style="list-style-type: none"> <li>• E4 - Reactive Power devices installed for the sole benefit of a retail customer(s).</li> </ul> <p>Note - Elements may be included or excluded on a case-by-case basis through the Rules of Procedure exception process.</p>
Bulk-Power System	<a href="#">Project 2015-04</a>		11/5/2015	1/21/2016	7/1/2016	Bulk-Power System: (A) facilities and control systems necessary for operating an interconnected electric energy transmission network (or any portion thereof); and (B) electric energy from generation facilities needed to maintain transmission system reliability. The term does not include facilities used in the local distribution of electric energy. (Note that the terms "Bulk-Power System" or "Bulk Power System" shall have the same meaning.)
Burden	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Operation of the Bulk Electric System that violates or is expected to violate a System Operating Limit or Interconnection Reliability Operating Limit in the Interconnection, or that violates any other NERC, Regional Reliability Organization, or local operating reliability standards or criteria.
Bus-tie Breaker	<a href="#">Project 2006-02</a>		8/4/2011	10/17/2013	1/1/2015	A circuit breaker that is positioned to connect two individual substation bus configurations.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Capacity Benefit Margin	<a href="#">Version 0 Reliability Standards</a>	CBM	2/8/2005	3/16/2007		The amount of firm transmission transfer capability preserved by the transmission provider for Load-Serving Entities (LSEs), whose loads are located on that Transmission Service Provider's system, to enable access by the LSEs to generation from interconnected systems to meet generation reliability requirements. Preservation of CBM for an LSE allows that entity to reduce its installed generating capacity below that which may otherwise have been necessary without interconnections to meet its generation reliability requirements. The transmission transfer capability preserved as CBM is intended to be used by the LSE only in times of emergency generation deficiencies.
Capacity Benefit Margin Implementation Document	<a href="#">Project 2006-07</a>	CBMID	11/13/2008	11/24/2009		A document that describes the implementation of a Capacity Benefit Margin methodology.
Capacity Emergency	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A capacity emergency exists when a Balancing Authority Area's operating capacity, plus firm purchases from other systems, to the extent available or limited by transfer capability, is inadequate to meet its demand plus its regulating requirements.
Cascading	<a href="#">Project 2015-04</a>		11/5/2015	1/21/2016	7/1/2016	The uncontrolled successive loss of System Elements triggered by an incident at any location. Cascading results in widespread electric service interruption that cannot be restrained from sequentially spreading beyond an area predetermined by studies.
CIP Exceptional Circumstance	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	A situation that involves or threatens to involve one or more of the following, or similar, conditions that impact safety or BES reliability: a risk of injury or death; a natural disaster; civil unrest; an imminent or existing hardware, software, or equipment failure; a Cyber Security Incident requiring emergency assistance; a response by emergency services; the enactment of a mutual assistance agreement; or an impediment of large scale workforce availability.
CIP Senior Manager	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	A single senior management official with overall authority and responsibility for leading and managing implementation of and continuing adherence to the requirements within the NERC CIP Standards, CIP-002 through CIP-011.
Clock Hour	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The 60-minute period ending at :00. All surveys, measurements, and reports are based on Clock Hour periods unless specifically noted.
Cogeneration	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Production of electricity from steam, heat, or other forms of energy produced as a by-product of another process.
Compliance Monitor	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The entity that monitors, reviews, and ensures compliance of responsible entities with reliability standards.
Composite Confirmed Interchange	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	The energy profile (including non-default ramp) throughout a given time period, based on the aggregate of all Confirmed Interchange occurring in that time period.
Composite Protection System	<a href="#">2010-05.1</a>		8/14/2014	5/13/2015	7/1/2016	The total complement of Protection System(s) that function collectively to protect an Element. Backup protection provided by a different Element's Protection System(s) is excluded.
Confirmed Interchange	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	The state where no party has denied and all required parties have approved the Arranged Interchange.
Congestion Management Report	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A report that the Interchange Distribution Calculator issues when a Reliability Coordinator initiates the Transmission Loading Relief procedure. This report identifies the transactions and native and network load curtailments that must be initiated to achieve the loading relief requested by the initiating Reliability Coordinator.
Consequential Load Loss	<a href="#">Project 2006-02</a>		8/4/2011	10/17/2013	1/1/2015	All Load that is no longer served by the Transmission system as a result of Transmission Facilities being removed from service by a Protection System operation designed to isolate the fault.
Constrained Facility	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A transmission facility (line, transformer, breaker, etc.) that is approaching, is at, or is beyond its System Operating Limit or Interconnection Reliability Operating Limit.
Contingency	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The unexpected failure or outage of a system component, such as a generator, transmission line, circuit breaker, switch or other electrical element.
Contingency Reserve	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The provision of capacity deployed by the Balancing Authority to meet the Disturbance Control Standard (DCS) and other NERC and Regional Reliability Organization contingency requirements.
Contact Path	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An agreed upon electrical path for the continuous flow of electrical power between the parties of an Interchange Transaction.
Control Center	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	One or more facilities hosting operating personnel that monitor and control the Bulk Electric System (BES) in real-time to perform the reliability tasks, including their associated data centers, of: 1) a Reliability Coordinator, 2) a Balancing Authority, 3) a Transmission Operator for transmission Facilities at two or more locations, or 4) a Generator Operator for generation Facilities at two or more locations.
Control Performance Standard	<a href="#">Version 0 Reliability Standards</a>	CPS	2/8/2005	3/16/2007		The reliability standard that sets the limits of a Balancing Authority's Area Control Error over a specified time period.
Corrective Action Plan	<a href="#">Phase III-IV Planning Standards - Archive</a>		2/7/2006	3/16/2007		A list of actions and an associated timetable for implementation to remedy a specific problem.
Cranking Path	<a href="#">Phase III-IV Planning Standards - Archive</a>		5/2/2006	3/16/2007		A portion of the electric system that can be isolated and then energized to deliver electric power from a generation source to enable the startup of one or more other generating units.
Curtailment	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A reduction in the scheduled capacity or energy delivery of an Interchange Transaction.
Curtailment Threshold	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The minimum Transfer Distribution Factor which, if exceeded, will subject an Interchange Transaction to curtailment to relieve a transmission facility constraint.
Cyber Assets	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	Programmable electronic devices, including the hardware, software, and data in those devices.
Cyber Security Incident	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	A malicious act or suspicious event that: <ul style="list-style-type: none"> <li>• Compromises, or was an attempt to compromise, the Electronic Security Perimeter or Physical Security Perimeter or,</li> <li>• Disrupts, or was an attempt to disrupt, the operation of a BES Cyber System.</li> </ul>
Delayed Fault Clearing	<a href="#">Determine Facility Ratings, Operating Limits, and Transfer Capabilities</a>		11/1/2006	12/27/2007		Fault clearing consistent with correct operation of a breaker failure protection system and its associated breakers, or of a backup protection system with an intentional time delay.
Demand	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		1. The rate at which electric energy is delivered to or by a system or part of a system, generally expressed in kilowatts or megawatts, at a given instant or averaged over any designated interval of time. 2. The rate at which energy is being used by the customer.
Demand-Side Management	<a href="#">Project 2010-04</a>	DSM	5/6/2014	2/19/2015	7/1/2016	All activities or programs undertaken by any applicable entity to achieve a reduction in Demand.
Dial-up Connectivity	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	A data communication link that is established when the communication equipment dials a phone number and negotiates a connection with the equipment on the other end of the link.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Direct Control Load Management	<a href="#">Project 2008-06</a>	DCLM	2/8/2005	3/16/2007		Demand-Side Management that is under the direct control of the system operator. DCLM may control the electric supply to individual appliances or equipment on customer premises. DCLM as defined here does not include Interruptible Demand.
Dispatch Order	<a href="#">Project 2006-07</a>		8/22/2008	11/24/2009		A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, each generator is ranked by priority.
Dispersed Load by Substations	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Substation load information configured to represent a system for power flow or system dynamics modeling purposes, or both.
Distribution Factor	<a href="#">Version 0 Reliability Standards</a>	DF	2/8/2005	3/16/2007		The portion of an Interchange Transaction, typically expressed in per unit that flows across a transmission facility (Flowgate).
Distribution Provider	<a href="#">Project 2015-04</a>	DP	11/5/2015	1/21/2016	7/1/2016	Provides and operates the "wires" between the transmission system and the end-use customer. For those end-use customers who are served at transmission voltages, the Transmission Owner also serves as the Distribution Provider. Thus, the Distribution Provider is not defined by a specific voltage, but rather as performing the distribution function at any voltage.
Disturbance	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		1. An unplanned event that produces an abnormal system condition. 2. Any perturbation to the electric system. 3. The unexpected change in ACE that is caused by the sudden failure of generation or interruption of load.
Disturbance Control Standard	<a href="#">Version 0 Reliability Standards</a>	DCS	2/8/2005	3/16/2007		The reliability standard that sets the time limit following a Disturbance within which a Balancing Authority must return its Area Control Error to within a specified range.
Disturbance Monitoring Equipment	<a href="#">Phase III-IV Planning Standards</a>	DME	8/2/2006	3/16/2007		Devices capable of monitoring and recording system data pertaining to a Disturbance. Such devices include the following categories of recorders* : • Sequence of event recorders which record equipment response to the event • Fault recorders, which record actual waveform data replicating the system primary voltages and currents. This may include protective relays. • Dynamic Disturbance Recorders (DDRs), which record incidents that portray power system behavior during dynamic events such as low-frequency (0.1 Hz – 3 Hz) oscillations and abnormal frequency or voltage excursions *Phasor Measurement Units and any other equipment that meets the functional requirements of DMEs may qualify as DMEs.
Dynamic Interchange Schedule or Dynamic Schedule	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	A time-varying energy transfer that is updated in Real-time and included in the Scheduled Net Interchange (NIS) term in the same manner as an Interchange Schedule in the affected Balancing Authorities' control ACE equations (or alternate control processes).
Dynamic Transfer	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The provision of the real-time monitoring, telemetering, computer software, hardware, communications, engineering, energy accounting (including inadvertent interchange), and administration required to electronically move all or a portion of the real energy services associated with a generator or load out of one Balancing Authority Area into another.
Economic Dispatch	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The allocation of demand to individual generating units on line to effect the most economical production of electricity.
Electronic Access Control or Monitoring Systems	<a href="#">Project 2008-06 Order 706</a>	EACMS	11/26/2012	11/22/2013	7/1/2016	Cyber Assets that perform electronic access control or electronic access monitoring of the Electronic Security Perimeter(s) or BES Cyber Systems. This includes Intermediate Systems.
Electronic Access Point	<a href="#">Project 2008-06 Order 706</a>	EAP	11/26/2012	11/22/2013	7/1/2016	A Cyber Asset interface on an Electronic Security Perimeter that allows routable communication between Cyber Assets outside an Electronic Security Perimeter and Cyber Assets inside an Electronic Security Perimeter.
Electrical Energy	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The generation or use of electric power by a device over a period of time, expressed in kilowatthours (kWh), megawatthours (MWh), or gigawatthours (GWh).
Electronic Security Perimeter	<a href="#">Project 2008-06 Order 706</a>	ESP	11/26/2012	11/22/2013	7/1/2016	The logical border surrounding a network to which BES Cyber Systems are connected using a routable protocol.
Element	<a href="#">Project 2015-04</a>		11/5/2015	1/21/2016	7/1/2016	Any electrical device with terminals that may be connected to other electrical devices such as a generator, transformer, circuit breaker, bus section, or transmission line. An Element may be comprised of one or more components.
Emergency or BES Emergency	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Any abnormal system condition that requires automatic or immediate manual action to prevent or limit the failure of transmission facilities or generation supply that could adversely affect the reliability of the Bulk Electric System.
Emergency Rating	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The rating as defined by the equipment owner that specifies the level of electrical loading or output, usually expressed in megawatts (MW) or Mvar or other appropriate units, that a system, facility, or element can support, produce, or withstand for a finite period. The rating assumes acceptable loss of equipment life or other physical or safety limitations for the equipment involved.
Emergency Request for Interchange	<a href="#">Project 2007-14 Coordinate Interchange</a>	Emergency RFI	10/29/2008	12/17/2009		Request for Interchange to be initiated for Emergency or Energy Emergency conditions.
Energy Emergency	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A condition when a Load-Serving Entity has exhausted all other options and can no longer provide its customers' expected energy requirements.
Equipment Rating	<a href="#">Determine Facility Ratings, Operating Limits, and Transfer Capabilities</a>		2/7/2006	3/16/2007		The maximum and minimum voltage, current, frequency, real and reactive power flows on individual equipment under steady state, short-circuit and transient conditions, as permitted or assigned by the equipment owner.
External Routable Connectivity	<a href="#">Project 2008-06 Order 706</a>		11/26/2012	11/22/2013	7/1/2016	The ability to access a BES Cyber System from a Cyber Asset that is outside of its associated Electronic Security Perimeter via a bi-directional routable protocol connection.
Existing Transmission Commitments	<a href="#">Project 2006-07</a>	ETC	8/22/2008	11/24/2009		Committed uses of a Transmission Service Provider's Transmission system considered when determining ATC or AFC.
Facility	<a href="#">Determine Facility Ratings, Operating Limits, and Transfer Capabilities</a>		2/7/2006	3/16/2007		A set of electrical equipment that operates as a single Bulk Electric System Element (e.g., a line, a generator, a shunt compensator, transformer, etc.)
Facility Rating	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The maximum or minimum voltage, current, frequency, or real or reactive power flow through a facility that does not violate the applicable equipment rating of any equipment comprising the facility.
Fault	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An event occurring on an electric system such as a short circuit, a broken wire, or an intermittent connection.
Fire Risk	<a href="#">Project 2007-07</a>		2/7/2006	3/16/2007		The likelihood that a fire will ignite or spread in a particular geographic area.
Firm Demand	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		That portion of the Demand that a power supplier is obligated to provide except when system reliability is threatened or during emergency conditions.
Firm Transmission Service	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The highest quality (priority) service offered to customers under a filed rate schedule that anticipates no planned interruption.
Flashover	<a href="#">Project 2007-07</a>		2/7/2006	3/16/2007		An electrical discharge through air around or over the surface of insulation, between objects of different potential, caused by placing a voltage across the air space that results in the ionization of the air space.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Flowgate	<a href="#">Project 2006-07</a>		8/22/2008	11/24/2009		1.) A portion of the Transmission system through which the Interchange Distribution Calculator calculates the power flow from Interchange Transactions. 2.) A mathematical construct, comprised of one or more monitored transmission Facilities and optionally one or more contingency Facilities, used to analyze the impact of power flows upon the Bulk Electric System.
Flowgate Methodology	<a href="#">Version 0 Reliability Standards</a>		8/22/2008	11/24/2009		The Flowgate methodology is characterized by identification of key Facilities as Flowgates. Total Flowgate Capabilities are determined based on Facility Ratings and voltage and stability limits. The impacts of Existing Transmission Commitments (ETCs) are determined by simulation. The impacts of ETC, Capacity Benefit Margin (CBM) and Transmission Reliability Margin (TRM) are subtracted from the Total Flowgate Capability, and Postbacks and counterflows are added, to determine the Available Flowgate Capability (AFC) value for that Flowgate. AFCs can be used to determine Available Transfer Capability (ATC).
Forced Outage	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		1. The removal from service availability of a generating unit, transmission line, or other facility for emergency reasons. 2. The condition in which the equipment is unavailable due to unanticipated failure.
Frequency Bias	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A value, usually expressed in megawatts per 0.1 Hertz (MW/0.1 Hz), associated with a Balancing Authority Area that approximates the Balancing Authority Area's response to Interconnection frequency error.
Frequency Bias Setting	<a href="#">Project 2007-12</a>		2/7/2013	1/16/2014	4/1/2015	A number, either fixed or variable, usually expressed in MW/0.1 Hz, included in a Balancing Authority's Area Control Error equation to account for the Balancing Authority's inverse Frequency Response contribution to the Interconnection, and discourage response withdrawal through secondary control systems.
Frequency Deviation	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A change in interconnection frequency.
Frequency Error	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The difference between the actual and scheduled frequency. ( $F_a - F_s$ )
Frequency Regulation	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The ability of a Balancing Authority to help the Interconnection maintain Scheduled Frequency. This assistance can include both turbine governor response and Automatic Generation Control.
Frequency Response	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		(Equipment) The ability of a system or elements of the system to react or respond to a change in system frequency. (System) The sum of the change in demand, plus the change in generation, divided by the change in frequency, expressed in megawatts per 0.1 Hertz (MW/0.1 Hz).
Frequency Response Measure	<a href="#">Project 2007-12</a>	FRM	2/7/2013	1/16/2014	4/1/2015	The median of all the Frequency Response observations reported annually by Balancing Authorities or Frequency Response Sharing Groups for frequency events specified by the ERO. This will be calculated as MW/0.1Hz.
Frequency Response Obligation	<a href="#">Project 2007-12</a>	FRO	2/7/2013	1/16/2014	4/1/2015	The Balancing Authority's share of the required Frequency Response needed for the reliable operation of an Interconnection. This will be calculated as MW/0.1Hz.
Frequency Response Sharing Group	<a href="#">Project 2007-12</a>	FRSG	2/7/2013	1/16/2014	4/1/2015	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating resources required to jointly meet the sum of the Frequency Response Obligations of its members.
Generator Operator	<a href="#">Version 0 Reliability Standards</a>	GOP	11/5/2015	1/21/2016	7/1/2016	The entity that operates generating Facility(ies) and performs the functions of supplying energy and Interconnected Operations Services.
Generator Owner	<a href="#">Version 0 Reliability Standards</a>	GO	11/5/2015	1/21/2016	7/1/2016	Entity that owns and maintains generating Facility(ies).
Generator Shift Factor	<a href="#">Version 0 Reliability Standards</a>	GSF	2/8/2005	3/16/2007		A factor to be applied to a generator's expected change in output to determine the amount of flow contribution that change in output will impose on an identified transmission facility or Flowgate.
Generator-to-Load Distribution Factor	<a href="#">Version 0 Reliability Standards</a>	GLDF	2/8/2005	3/16/2007		The algebraic sum of a Generator Shift Factor and a Load Shift Factor to determine the total impact of an Interchange Transaction on an identified transmission facility or Flowgate.
Generation Capability Import Requirement	<a href="#">Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions</a>	GCIR	11/13/2008	11/24/2009		The amount of generation capability from external sources identified by a Load-Serving Entity (LSE) or Resource Planner (RP) to meet its generation reliability or resource adequacy requirements as an alternative to internal resources.
Host Balancing Authority	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		1. A Balancing Authority that confirms and implements Interchange Transactions for a Purchasing Selling Entity that operates generation or serves customers directly within the Balancing Authority's metered boundaries. 2. The Balancing Authority within whose metered boundaries a jointly owned unit is physically located.
Hourly Value	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Data measured on a Clock Hour basis.
Implemented Interchange	<a href="#">Coordinate Interchange</a>		5/2/2006	3/16/2007		The state where the Balancing Authority enters the Confirmed Interchange into its Area Control Error equation.
Inadvertent Interchange	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The difference between the Balancing Authority's Net Actual Interchange and Net Scheduled Interchange. ( $IA - IS$ )
Independent Power Producer	<a href="#">Version 0 Reliability Standards</a>	IPP	2/8/2005	3/16/2007		Any entity that owns or operates an electricity generating facility that is not included in an electric utility's rate base. This term includes, but is not limited to, cogenerators and small power producers and all other nonutility electricity producers, such as exempt wholesale generators, who sell electricity.
Institute of Electrical and Electronics Engineers, Inc.	<a href="#">Project 2007-07</a>	IEEE	2/7/2006	3/16/2007		
Interactive Remote Access	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	User-initiated access by a person employing a remote access client or other remote access technology using a routable protocol. Remote access originates from a Cyber Asset that is not an Intermediate System and not located within any of the Responsible Entity's Electronic Security Perimeter(s) or at a defined Electronic Access Point (EAP). Remote access may be initiated from: 1) Cyber Assets used or owned by the Responsible Entity, 2) Cyber Assets used or owned by employees, and 3) Cyber Assets used or owned by vendors, contractors, or consultants. Interactive remote access does not include system-to-system process communications.
Interchange	<a href="#">Coordinate Interchange</a>		5/2/2006	3/16/2007		Energy transfers that cross Balancing Authority boundaries.
Interchange Authority	<a href="#">Project 2015-04</a>	IA	11/5/2015	1/21/2016	7/1/2016	The responsible entity that authorizes the implementation of valid and balanced Interchange Schedules between Balancing Authority Areas, and ensures communication of Interchange information for reliability assessment purposes.
Interchange Distribution Calculator	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The mechanism used by Reliability Coordinators in the Eastern Interconnection to calculate the distribution of Interchange Transactions over specific Flowgates. It includes a database of all Interchange Transactions and a matrix of the Distribution Factors for the Eastern Interconnection.



TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Interchange Schedule	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An agreed-upon Interchange Transaction size (megawatts), start and end time, beginning and ending ramp times and rate, and type required for delivery and receipt of power and energy between the Source and Sink Balancing Authorities involved in the transaction.
Interchange Transaction	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An agreement to transfer energy from a seller to a buyer that crosses one or more Balancing Authority Area boundaries.
Interchange Transaction Tag or Tag	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The details of an Interchange Transaction required for its physical implementation.
Interconnected Operations Service	<a href="#">Project 2015-04</a>		11/5/2015	1/21/2016	7/1/2016	A service (exclusive of basic energy and Transmission Services) that is required to support the Reliable Operation of interconnected Bulk Electric Systems.
Interconnection	<a href="#">Project 2015-04</a>		11/5/2015	1/21/2016	7/1/2016	A geographic area in which the operation of Bulk Power System components is synchronized such that the failure of one or more of such components may adversely affect the ability of the operators of other components within the system to maintain Reliable Operation of the Facilities within their control. When capitalized, any one of the four major electric system networks in North America: Eastern, Western, ERCOT and Quebec.
Interconnection Reliability Operating Limit	<a href="#">Determine Facility Ratings, Operating Limits, and Transfer Capabilities</a>	IROL	11/1/2006	12/27/2007		A System Operating Limit that, if violated, could lead to instability, uncontrolled separation, or Cascading outages that adversely impact the reliability of the Bulk Electric System.
Interconnection Reliability Operating Limit T <sub>v</sub>	<a href="#">Determine Facility Ratings, Operating Limits, and Transfer Capabilities</a>	IROL T <sub>v</sub>	11/1/2006	12/27/2007		The maximum time that an Interconnection Reliability Operating Limit can be violated before the risk to the interconnection or other Reliability Coordinator Area(s) becomes greater than acceptable. Each Interconnection Reliability Operating Limit's T <sub>v</sub> shall be less than or equal to 30 minutes.
Intermediate Balancing Authority	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	A Balancing Authority on the scheduling path of an Interchange Transaction other than the Source Balancing Authority and Sink Balancing Authority.
Intermediate System	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013	7/1/2016	A Cyber Asset or collection of Cyber Assets performing access control to restrict Interactive Remote Access to only authorized users. The Intermediate System must not be located inside the Electronic Security Perimeter.
Interpersonal Communication	<a href="#">Project 2006-06</a>		11/7/2012	4/16/2015	10/1/2015	Any medium that allows two or more individuals to interact, consult, or exchange information.
Interruptible Load or Interruptible Demand	<a href="#">Version 0 Reliability Standards</a>		11/1/2006	3/16/2007		Demand that the end-use customer makes available to its Load-Serving Entity via contract or agreement for curtailment.
Joint Control	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Automatic Generation Control of jointly owned units by two or more Balancing Authorities.
Limiting Element	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The element that is 1.) Either operating at its appropriate rating, or 2.) Would be following the limiting contingency. Thus, the Limiting Element establishes a system limit.
Load	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An end-use device or customer that receives power from the electric system.
Load Shift Factor	<a href="#">Version 0 Reliability Standards</a>	LSF	2/8/2005	3/16/2007		A factor to be applied to a load's expected change in demand to determine the amount of flow contribution that change in demand will impose on an identified transmission facility or monitored Flowgate.
Load-Serving Entity	<a href="#">Project 2015-04</a>	LSE	11/5/2015	1/21/2016	7/1/2016	Secures energy and Transmission Service (and related Interconnected Operations Services) to serve the electrical demand and energy requirements of its end-use customers.
Long-Term Transmission Planning Horizon	<a href="#">Project 2006-02</a>		8/4/2011	10/17/2013	1/1/2015	Transmission planning period that covers years six through ten or beyond when required to accommodate any known longer lead time projects that may take longer than ten years to complete.
Low Impact BES Cyber System Electronic Access Point	<a href="#">Project 2008-06</a>	LEAP	2/12/2015	1/21/2016	7/1/2016	A Cyber Asset interface that controls Low Impact External Routable Connectivity. The Cyber Asset containing the LEAP may reside at a location external to the asset or assets containing low impact BES Cyber Systems.
Low Impact External Routable Connectivity	<a href="#">Project 2008-06</a>	LERC	2/12/2015	1/21/2016	7/1/2016	Direct user-initiated interactive access or a direct device-to-device connection to a low impact BES Cyber System(s) from a Cyber Asset outside the asset containing those low impact BES Cyber System(s) via a bi-directional routable protocol connection. Point-to-point communications between intelligent electronic devices that use routable communication protocols for time-sensitive protection or control functions between Transmission station or substation assets containing low impact BES Cyber Systems are excluded from this definition (examples of this communication include, but are not limited to, IEC 61850 GOOSE or vendor proprietary protocols).
Market Flow	<a href="#">Project 2006-08 Reliability Coordination - Transmission Loading Relief</a>		11/4/2010	4/21/2011		The total amount of power flowing across a specified Facility or set of Facilities due to a market dispatch of generation internal to the market to serve load internal to the market.
Minimum Vegetation Clearance Distance	<a href="#">Project 2007-07</a>	MVCD	11/3/2011	3/21/2013	7/1/2014	The calculated minimum distance stated in feet (meters) to prevent flash-over between conductors and vegetation, for various altitudes and operating voltages.
Misoperation	<a href="#">Project 2010-05.1</a>		8/14/2014	5/13/2015	7/1/2016	The failure of a Composite Protection System to operate as intended for protection purposes. Any of the following is a Misoperation: <b>1. Failure to Trip – During Fault</b> – A failure of a Composite Protection System to operate for a Fault condition for which it is designed. The failure of a Protection System component is not a Misoperation as long as the performance of the Composite Protection System is correct. <b>2. Failure to Trip – Other Than Fault</b> – A failure of a Composite Protection System to operate for a non-Fault condition for which it is designed, such as a power swing, undervoltage, overexcitation, or loss of excitation. The failure of a Protection System component is not a Misoperation as long as the performance of the Composite Protection System is correct. <b>3. Slow Trip – During Fault</b> – A Composite Protection System operation that is slower than required for a Fault condition if the duration of its operating time resulted in the operation of at least one other Element's Composite Protection System. (continued below...)
Misoperation (continued...)	<a href="#">Project 2010-05.1</a>		8/14/2014	5/13/2015	7/1/2016	<b>4. Slow Trip – Other Than Fault</b> – A Composite Protection System operation that is slower than required for a non-Fault condition, such as a power swing, undervoltage, overexcitation, or loss of excitation, if the duration of its operating time resulted in the operation of at least one other Element's Composite Protection System. <b>5. Unnecessary Trip – During Fault</b> – An unnecessary Composite Protection System operation for a Fault condition on another Element. <b>6. Unnecessary Trip – Other Than Fault</b> – An unnecessary Composite Protection System operation for a non-Fault condition. A Composite Protection System operation that is caused by personnel during on-site maintenance, testing, inspection, construction, or commissioning activities is not a Misoperation.
Native Balancing Authority	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	A Balancing Authority from which a portion of its physically interconnected generation and/or load is transferred from its effective control boundaries to the Attaining Balancing Authority through a Dynamic Transfer.
Native Load	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The end-use customers that the Load-Serving Entity is obligated to serve.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Near-Term Transmission Planning Horizon	<a href="#">Project 2010-10</a>		1/24/2011	11/17/2011		The transmission planning period that covers Year One through five.
Net Actual Interchange	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The algebraic sum of all metered interchange over all interconnections between two physically Adjacent Balancing Authority Areas.
Net Energy for Load	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Net Balancing Authority Area generation, plus energy received from other Balancing Authority Areas, less energy delivered to Balancing Authority Areas through interchange. It includes Balancing Authority Area losses but excludes energy required for storage at energy storage facilities.
Net Interchange Schedule	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The algebraic sum of all Interchange Schedules with each Adjacent Balancing Authority.
Net Scheduled Interchange	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The algebraic sum of all Interchange Schedules across a given path or between Balancing Authorities for a given period or instant in time.
Network Integration Transmission Service	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Service that allows an electric transmission customer to integrate, plan, economically dispatch and regulate its network reserves in a manner comparable to that in which the Transmission Owner serves Native Load customers.
Non-Consequential Load Loss	<a href="#">Project 2006-02</a>		8/4/2011	10/17/2013	1/1/2015	Non-interruptible Load loss that does not include: (1) Consequential Load Loss, (2) the response of voltage sensitive Load, or (3) Load that is disconnected from the System by end-user equipment.
Non-Firm Transmission Service	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Transmission service that is reserved on an as-available basis and is subject to curtailment or interruption.
Non-Spinning Reserve	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		1. That generating reserve not connected to the system but capable of serving demand within a specified time. 2. Interruptible load that can be removed from the system in a specified time.
Normal Clearing	<a href="#">Determine Facility Ratings, Operating Limits, and Transfer Capabilities</a>		11/1/2006	12/27/2007		A protection system operates as designed and the fault is cleared in the time normally expected with proper functioning of the installed protection systems.
Normal Rating	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The rating as defined by the equipment owner that specifies the level of electrical loading, usually expressed in megawatts (MW) or other appropriate units that a system, facility, or element can support or withstand through the daily demand cycles without loss of equipment life.
Nuclear Plant Generator Operator	<a href="#">Project 2009-08</a>		5/2/2007	10/16/2008		Any Generator Operator or Generator Owner that is a Nuclear Plant Licensee responsible for operation of a nuclear facility licensed to produce commercial power.
Nuclear Plant Off-site Power Supply (Off-site Power)	<a href="#">Project 2009-08</a>		5/2/2007	10/16/2008		The electric power supply provided from the electric system to the nuclear power plant distribution system as required per the nuclear power plant license.
Nuclear Plant Licensing Requirements	<a href="#">Project 2009-08</a>	NPLRs	5/2/2007	10/16/2008		Requirements included in the design basis of the nuclear plant and statutorily mandated for the operation of the plant, including nuclear power plant licensing requirements for: 1) Off-site power supply to enable safe shutdown of the plant during an electric system or plant event; and 2) Avoiding preventable challenges to nuclear safety as a result of an electric system disturbance, transient, or condition.
Nuclear Plant Interface Requirements	<a href="#">Project 2009-08</a>	NPIRs	5/2/2007	10/16/2008		The requirements based on NPLRs and Bulk Electric System requirements that have been mutually agreed to by the Nuclear Plant Generator Operator and the applicable Transmission Entities.
Off-Peak	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Those hours or other periods defined by NAESB business practices, contract, agreements, or guides as periods of lower electrical demand.
On-Peak	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Those hours or other periods defined by NAESB business practices, contract, agreements, or guides as periods of higher electrical demand.
Open Access Same Time Information Service	<a href="#">Version 0 Reliability Standards</a>	OASIS	2/8/2005	3/16/2007		An electronic posting system that the Transmission Service Provider maintains for transmission access data and that allows all transmission customers to view the data simultaneously.
Open Access Transmission Tariff	<a href="#">Version 0 Reliability Standards</a>	OATT	2/8/2005	3/16/2007		Electronic transmission tariff accepted by the U.S. Federal Energy Regulatory Commission requiring the Transmission Service Provider to furnish to all shippers with non-discriminating service comparable to that provided by Transmission Owners to themselves.
Operating Instruction	<a href="#">Project 2007-02</a>		5/6/2014	4/16/2015	7/1/2016	A command by operating personnel responsible for the Real-time operation of the interconnected Bulk Electric System to change or preserve the state, status, output, or input of an Element of the Bulk Electric System or Facility of the Bulk Electric System. (A discussion of general information and of potential options or alternatives to resolve Bulk Electric System operating concerns is not a command and is not considered an Operating Instruction.)
Operating Plan	<a href="#">Coordinate Operations</a>		2/7/2006	3/16/2007		A document that identifies a group of activities that may be used to achieve some goal. An Operating Plan may contain Operating Procedures and Operating Processes. A company-specific system restoration plan that includes an Operating Procedure for black-starting units, Operating Processes for communicating restoration progress with other entities, etc., is an example of an Operating Plan.
Operating Procedure	<a href="#">Coordinate Operations</a>		2/7/2006	3/16/2007		A document that identifies specific steps or tasks that should be taken by one or more specific operating positions to achieve specific operating goal(s). The steps in an Operating Procedure should be followed in the order in which they are presented, and should be performed by the position(s) identified. A document that lists the specific steps for a system operator to take in removing a specific transmission line from service is an example of an Operating Procedure.
Operating Process	<a href="#">Coordinate Operations</a>		2/7/2006	3/16/2007		A document that identifies general steps for achieving a generic operating goal. An Operating Process includes steps with options that may be selected depending upon Real-time conditions. A guideline for controlling high voltage is an example of an Operating Process.
Operating Reserve	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		That capability above firm system demand required to provide for regulation, load forecasting error, equipment forced and scheduled outages and local area protection. It consists of spinning and non-spinning reserve.
Operating Reserve – Spinning	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The portion of Operating Reserve consisting of: • Generation synchronized to the system and fully available to serve load within the Disturbance Recovery Period following the contingency event; or • Load fully removable from the system within the Disturbance Recovery Period following the contingency event.
Operating Reserve – Supplemental	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The portion of Operating Reserve consisting of: • Generation (synchronized or capable of being synchronized to the system) that is fully available to serve load within the Disturbance Recovery Period following the contingency event; or • Load fully removable from the system within the Disturbance Recovery Period following the contingency event.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Operating Voltage	<a href="#">Project 2007-07</a>		2/7/2006	3/16/2007		The voltage level by which an electrical system is designated and to which certain operating characteristics of the system are related; also, the effective (root-mean-square) potential difference between any two conductors or between a conductor and the ground. The actual voltage of the circuit may vary somewhat above or below this value.
Operational Planning Analysis	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	An analysis of the expected system conditions for the next day's operation. (That analysis may be performed either a day ahead or as much as 12 months ahead.) Expected system conditions include things such as load forecast(s), generation output levels, interchange, and known system constraints (transmission facility outages, generator outages, equipment limitations, etc.).
Operations Support Personnel	<a href="#">Project 2010-01</a>		2/6/2014	6/19/2014	7/1/2016	Individuals who perform current day or next day outage coordination or assessments, or who determine SOLs, IROLs, or operating nomograms, in direct support of Real-time operations of the Bulk Electric System.
Outage Transfer Distribution Factor	<a href="#">Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions</a>	OTDF	8/22/2008	11/24/2009		In the post-contingency configuration of a system under study, the electric Power Transfer Distribution Factor (PTDF) with one or more system Facilities removed from service (outaged).
Overlap Regulation Service	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A method of providing regulation service in which the Balancing Authority providing the regulation service incorporates another Balancing Authority's actual interchange, frequency response, and schedules into providing Balancing Authority's AGC/ACE equation.
Participation Factors	<a href="#">Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions</a>		8/22/2008	11/24/2009		A set of dispatch rules such that given a specific amount of load to serve, an approximate generation dispatch can be determined. To accomplish this, generators are assigned a percentage that they will contribute to serve load.
Peak Demand	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		1. The highest hourly integrated Net Energy For Load within a Balancing Authority Area occurring within a given period (e.g., day, month, season, or year). 2. The highest instantaneous demand within the Balancing Authority Area.
Performance-Reset Period	<a href="#">Determine Facility Ratings, Operating Limits, and Transfer Capabilities</a>		2/7/2006	3/16/2007		The time period that the entity being assessed must operate without any violations to reset the level of non compliance to zero.
Physical Access Control Systems	<a href="#">Project 2008-06 Cyber Security Order 706</a>	PACS	11/26/2012	11/22/2013	7/1/2016	Cyber Assets that control, alert, or log access to the Physical Security Perimeter(s), exclusive of locally mounted hardware or devices at the Physical Security Perimeter such as motion sensors, electronic lock control mechanisms, and badge readers.
Physical Security Perimeter	<a href="#">Project 2008-06 Cyber Security Order 706</a>	PSP	11/26/2012	11/22/2013	7/1/2016	The physical border surrounding locations in which BES Cyber Assets, BES Cyber Systems, or Electronic Access Control or Monitoring Systems reside, and for which access is controlled.
Planning Assessment	<a href="#">Project 2006-02 Assess Transmission Future Needs and Develop Transmission Plans</a>		8/4/2011	10/17/2013	1/1/2015	Documented evaluation of future Transmission System performance and Corrective Action Plans to remedy identified deficiencies.
Planning Authority	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	The responsible entity that coordinates and integrates transmission Facilities and service plans, resource plans, and Protection Systems.
Planning Coordinator	<a href="#">Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions</a>	PC	8/22/2008	11/24/2009		See Planning Authority.
Point of Delivery	<a href="#">Version 0 Reliability Standards</a>	POD	2/8/2005	3/16/2007		A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction leaves or a Load-Serving Entity receives its energy.
Point of Receipt	<a href="#">Project 2015-04 Alignment of Terms</a>	POR	11/5/2015	1/21/2016	7/1/2016	A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction enters or a generator delivers its output.
Point to Point Transmission Service	<a href="#">Version 0 Reliability Standards</a>	PTP	2/8/2005	3/16/2007		The reservation and transmission of capacity and energy on either a firm or non-firm basis from the Point(s) of Receipt to the Point(s) of Delivery.
Power Transfer Distribution Factor	<a href="#">Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions</a>	PTDF	8/22/2008	11/24/2009		In the pre-contingency configuration of a system under study, a measure of the responsiveness or change in electrical loadings on transmission system Facilities due to a change in electric power transfer from one area to another, expressed in percent (up to 100%) of the change in power transfer
Pro Forma Tariff	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Usually refers to the standard OATT and/or associated transmission rights mandated by the U.S. Federal Energy Regulatory Commission Order No. 888.
Protected Cyber Assets	<a href="#">Project 2008-06 Cyber Security Order 706</a>	PCA	2/12/2015	1/21/2016	7/1/2016	One or more Cyber Assets connected using a routable protocol within or on an Electronic Security Perimeter that is not part of the highest impact BES Cyber System within the same Electronic Security Perimeter. The impact rating of Protected Cyber Assets is equal to the highest rated BES Cyber System in the same ESP.
Protection System	<a href="#">Project 2007-17 Protection System Maintenance and Testing</a>		11/19/2010	2/3/2012	4/1/2013	Protection System – • Protective relays which respond to electrical quantities, • Communications systems necessary for correct operation of protective functions • Voltage and current sensing devices providing inputs to protective relays, • Station dc supply associated with protective functions (including station batteries, battery chargers, and non-battery-based dc supply), and • Control circuitry associated with protective functions through the trip coil(s) of the circuit breakers or other interrupting devices.
Protection System Maintenance Program (PRC-005-6)	<a href="#">Project 2007-17.4 PRC-005 FERC Order No 803 Directive</a>	PSMP	11/5/2015	12/18/2015	1/1/2016	An ongoing program by which Protection System, Automatic Reclosing, and Sudden Pressure Relaying Components are kept in working order and proper operation of malfunctioning Components is restored. A maintenance program for a specific Component includes one or more of the following activities: • Verify — Determine that the Component is functioning correctly. • Monitor — Observe the routine in-service operation of the Component. • Test — Apply signals to a Component to observe functional performance or output behavior, or to diagnose problems. • Inspect — Examine for signs of Component failure, reduced performance or degradation. • Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.
Pseudo-Tie	<a href="#">Project 2008-12</a>		2/6/2014	6/30/2014	10/1/2014	A time-varying energy transfer that is updated in Real-time and included in the Actual Net Interchange term (NIA) in the same manner as a Tie Line in the affected Balancing Authorities' control ACE equations (or alternate control processes).
Purchasing-Selling Entity	<a href="#">Version 0 Reliability Standards</a>	PSE	2/8/2005	3/16/2007		The entity that purchases or sells, and takes title to, energy, capacity, and Interconnected Operations Services. Purchasing-Selling Entities may be affiliated or unaffiliated merchants and may or may not own generating facilities.
Ramp Rate or Ramp	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		(Schedule) The rate, expressed in megawatts per minute, at which the interchange schedule is attained during the ramp period. (Generator) The rate, expressed in megawatts per minute, that a generator changes its output.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Rated Electrical Operating Conditions	<a href="#">Project 2007-07 Transmission Vegetation Management</a>		2/7/2006	3/16/2007		The specified or reasonably anticipated conditions under which the electrical system or an individual electrical circuit is intend/ designed to operate
Rating	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The operational limits of a transmission system element under a set of specified conditions.
Rated System Path Methodology	<a href="#">Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions</a>		8/22/2008	11/24/2009		The Rated System Path Methodology is characterized by an initial Total Transfer Capability (TTC), determined via simulation. Capacity Benefit Margin, Transmission Reliability Margin, and Existing Transmission Commitments are subtracted from TTC, and Postbacks and counterflows are added as applicable, to derive Available Transfer Capability. Under the Rated System Path Methodology, TTC results are generally reported as specific transmission path capabilities.
Reactive Power	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	The portion of electricity that establishes and sustains the electric and magnetic fields of alternating-current equipment. Reactive Power must be supplied to most types of magnetic equipment, such as motors and transformers. It also must supply the reactive losses on transmission facilities. Reactive Power is provided by generators, synchronous condensers, or electrostatic equipment such as capacitors and directly influences electric system voltage. It is usually expressed in kilovars (kvar) or megavars (Mvar).
Real Power	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	The portion of electricity that supplies energy to the Load.
Real-time	<a href="#">Coordinate Operations</a>		2/7/2006	3/16/2007		Present time as opposed to future time. (From Interconnection Reliability Operating Limits standard.)
Real-time Assessment	<a href="#">Operate Within Interconnection Reliability Operating Limits</a>		10/17/2008	3/17/2011		An examination of existing and expected system conditions, conducted by collecting and reviewing immediately available data
Receiving Balancing Authority	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The Balancing Authority importing the Interchange.
Regional Reliability Organization	<a href="#">Version 0 Reliability Standards</a>	RRO	2/8/2005	3/16/2007		1. An entity that ensures that a defined area of the Bulk Electric System is reliable, adequate and secure. 2. A member of the North American Electric Reliability Council. The Regional Reliability Organization can serve as the Compliance Monitor.
Regional Reliability Plan	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The plan that specifies the Reliability Coordinators and Balancing Authorities within the Regional Reliability Organization, and explains how reliability coordination will be accomplished.
Regulating Reserve	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An amount of reserve responsive to Automatic Generation Control, which is sufficient to provide normal regulating margin.
Regulation Reserve Sharing Group	<a href="#">Project 2010-14.1 Phase 1</a>		8/15/2013	4/16/2015	7/1/2016	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply the Regulating Reserve required for all member Balancing Authorities to use in meeting applicable regulating standards.
Regulation Service	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The process whereby one Balancing Authority contracts to provide corrective response to all or a portion of the ACE of another Balancing Authority. The Balancing Authority providing the response assumes the obligation of meeting all applicable control criteria as specified by NERC for itself and the Balancing Authority for which it is providing the Regulation Service.
Reliability Adjustment Arranged Interchange	<a href="#">Project 2008-12 Coordinate Interchange Standards</a>		2/6/2014	6/30/2014	10/1/2014	A request to modify a Confirmed Interchange or Implemented Interchange for reliability purposes.
Reliability Adjustment RFI	<a href="#">Project 2007-14 Coordinate Interchange - Timing Table</a>		10/29/2008	12/17/2009		Request to modify an Implemented Interchange Schedule for reliability purposes.
Reliability Coordinator	<a href="#">Project 2015-04 Alignment of Terms</a>	RC	11/5/2015	1/21/2016	7/1/2016	The entity that is the highest level of authority who is responsible for the Reliable Operation of the Bulk Electric System, has the Wide Area view of the Bulk Electric System, and has the operating tools, processes and procedures, including the authority to prevent or mitigate emergency operating situations in both next-day analysis and real-time operations. The Reliability Coordinator has the purview that is broad enough to enable the calculation of Interconnection Reliability Operating Limits, which may be based on the operating parameters of transmission systems beyond any Transmission Operator's vision.
Reliability Coordinator Area	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The collection of generation, transmission, and loads within the boundaries of the Reliability Coordinator. Its boundary coincides with one or more Balancing Authority Areas.
Reliability Coordinator Information System	<a href="#">Version 0 Reliability Standards</a>	RCIS	2/8/2005	3/16/2007		The system that Reliability Coordinators use to post messages and share operating information in real time.
Reliability Standard	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	A requirement, approved by the United States Federal Energy Regulatory Commission under Section 215 of the Federal Power Act, or approved or recognized by an applicable governmental authority in other jurisdictions, to provide for Reliable Operation of the Bulk-Power System. The term includes requirements for the operation of existing Bulk-Power System facilities, including cybersecurity protection, and the design of planned additions or modifications to such facilities to the extent necessary to provide for Reliable Operation of the Bulk-Power System, but the term does not include any requirement to enlarge such facilities or to construct new transmission capacity or generation capacity.
Reliable Operation	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	Operating the elements of the [Bulk-Power System] within equipment and electric system thermal, voltage, and stability limits so that instability, uncontrolled separation, or cascading failures of such system will not occur as a result of a sudden disturbance, including a cybersecurity incident, or unanticipated failure of system elements.
Remedial Action Scheme	<a href="#">Version 0 Reliability Standards</a>	RAS	2/8/2005	3/16/2007		See "Special Protection System"
Removable Media	<a href="#">Project 2008-06 Cyber Security Order 706_V5 CIP Standards</a>		2/12/2015	1/21/2016	7/1/2016	Storage media that (i) are not Cyber Assets, (ii) are capable of transferring executable code, (iii) can be used to store, copy, move, or access data, and (iv) are directly connected for 30 consecutive calendar days or less to a BES Cyber Asset, a network within an ESP, or a Protected Cyber Asset. Examples include, but are not limited to, floppy disks, compact disks, USB flash drives, external hard drives, and other flash memory cards/drives that contain nonvolatile memory.
Reportable Cyber Security Incident	<a href="#">Project 2008-06 Cyber Security Order 706_V5 CIP Standards</a>		11/26/2012	11/22/2013	7/1/2016	A Cyber Security Incident that has compromised or disrupted one or more reliability tasks of a functional entity.
Reportable Disturbance	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Any event that causes an ACE change greater than or equal to 80% of a Balancing Authority's or reserve sharing group's most severe contingency. The definition of a reportable disturbance is specified by each Regional Reliability Organization. This definition may not be retroactively adjusted in response to observed performance.
Request for Interchange	<a href="#">Project 2008-12 Coordinate Interchange</a>	RFI	2/6/2014	6/30/2014	10/1/2014	A collection of data as defined in the NAESB Business Practice Standards submitted for the purpose of implementing bilateral Interchange between Balancing Authorities or an energy transfer within a single Balancing Authority.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Reserve Sharing Group	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating reserves required for each Balancing Authority's use in recovering from contingencies within the group. Scheduling energy from an Adjacent Balancing Authority to aid recovery need not constitute reserve sharing provided the transaction is ramped in over a period the supplying party could reasonably be expected to load generation in (e.g., ten minutes). If the transaction is ramped in quicker (e.g., between zero and ten minutes) then, for the purposes of disturbance control performance, the areas become a Reserve Sharing Group.
Reserve Sharing Group Reporting ACE	<a href="#">Project 2010-14.1 Phase 1</a>		8/15/2013	4/16/2015		At any given time of measurement for the applicable Reserve Sharing Group, the algebraic sum of the Reporting ACEs (or equivalent as calculated at such time of measurement) of the Balancing Authorities participating in the Reserve Sharing Group at the time of measurement.
Resource Planner	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	The entity that develops a long-term (generally one year and beyond) plan for the resource adequacy of specific loads (customer demand and energy requirements) within a Planning Authority area.
Response Rate	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The Ramp Rate that a generating unit can achieve under normal operating conditions expressed in megawatts per minute (MW/Min).
Right-of-Way	<a href="#">Project 2010-07</a>	ROW	5/9/2012	3/21/2013	7/1/2014	The corridor of land under a transmission line(s) needed to operate the line(s). The width of the corridor is established by engineering or construction standards as documented in either construction documents, pre-2007 vegetation maintenance records, or by the blowout standard in effect when the line was built. The ROW width in no case exceeds the applicable Transmission Owner's or applicable Generator Owner's legal rights but may be less based on the aforementioned criteria.
Scenario	<a href="#">Coordinate Operations</a>		2/7/2006	3/16/2007		Possible event.
Schedule	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		(Verb) To set up a plan or arrangement for an Interchange Transaction. (Noun) An Interchange Schedule.
Scheduled Frequency	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		60.0 Hertz, except during a time correction.
Scheduling Entity	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An entity responsible for approving and implementing Interchange Schedules.
Scheduling Path	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The Transmission Service arrangements reserved by the Purchasing-Selling Entity for a Transaction.
Sending Balancing Authority	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The Balancing Authority exporting the Interchange.
Sink Balancing Authority	<a href="#">Project 2008-12 Coordinate Interchange Standards</a>		2/6/2014	6/30/2014	10/1/2014	The Balancing Authority in which the load (sink) is located for an Interchange Transaction and any resulting Interchange Schedule.
Source Balancing Authority	<a href="#">Project 2008-12 Coordinate Interchange Standards</a>		2/6/2014	6/30/2014	10/1/2014	The Balancing Authority in which the generation (source) is located for an Interchange Transaction and for any resulting Interchange Schedule.
Special Protection System (Remedial Action Scheme)	<a href="#">Version 0 Reliability Standards</a>	SPS	2/8/2005	3/16/2007 (Becomes inactive 3/31/2017)		An automatic protection system designed to detect abnormal or predetermined system conditions, and take corrective actions other than and/or in addition to the isolation of faulted components to maintain system reliability. Such action may include changes in demand, generation (MW and Mvar), or system configuration to maintain system stability, acceptable voltage, or power flows. An SPS does not include (a) underfrequency or undervoltage load shedding or (b) fault conditions that must be isolated or (c) out-of-step relaying (not designed as an integral part of an SPS). Also called Remedial Action Scheme.
Spinning Reserve	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Unloaded generation that is synchronized and ready to serve additional demand.
Stability	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The ability of an electric system to maintain a state of equilibrium during normal and abnormal conditions or disturbances.
Stability Limit	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The maximum power flow possible through some particular point in the system while maintaining stability in the entire system or the part of the system to which the stability limit refers.
Supervisory Control and Data Acquisition	<a href="#">Version 0 Reliability Standards</a>	SCADA	2/8/2005	3/16/2007		A system of remote control and telemetry used to monitor and control the transmission system.
Supplemental Regulation Service	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A method of providing regulation service in which the Balancing Authority providing the regulation service receives a signal representing all or a portion of the other Balancing Authority's ACE.
Surge	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A transient variation of current, voltage, or power flow in an electric circuit or across an electric system.
Sustained Outage	<a href="#">Project 2007-07 Transmission Vegetation Management</a>		2/7/2006	3/16/2007		The deenergized condition of a transmission line resulting from a fault or disturbance following an unsuccessful automatic reclosing sequence and/or unsuccessful manual reclosing procedure.
System	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A combination of generation, transmission, and distribution components.
System Operating Limit	<a href="#">Project 2015-04 Alignment of Terms</a>	SOL	11/5/2015	1/21/2016	7/1/2016	The value (such as MW, Mvar, amperes, frequency or volts) that satisfies the most limiting of the prescribed operating criteria for a specified system configuration to ensure operation within acceptable reliability criteria. System Operating Limits are based upon certain operating criteria. These include, but are not limited to: <ul style="list-style-type: none"> <li>• Facility Ratings (applicable pre- and post-Contingency Equipment Ratings or Facility Ratings)</li> <li>• transient stability ratings (applicable pre- and post- Contingency stability limits)</li> <li>• voltage stability ratings (applicable pre- and post-Contingency voltage stability)</li> <li>• system voltage limits (applicable pre- and post-Contingency voltage limits)</li> </ul>
System Operator	<a href="#">Project 2010-01 Training</a>		2/6/2014	6/19/2014	7/1/2016	An individual at a Control Center of a Balancing Authority, Transmission Operator, or Reliability Coordinator, who operates or directs the operation of the Bulk Electric System (BES) in Real-time.
Telemetry	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The process by which measurable electrical quantities from substations and generating stations are instantaneously transmitted to the control center, and by which operating commands from the control center are transmitted to the substations and generating stations.
Thermal Rating	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The maximum amount of electrical current that a transmission line or electrical facility can conduct over a specified time period before it sustains permanent damage by overheating or before it sags to the point that it violates public safety requirements.
Tie Line	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A circuit connecting two Balancing Authority Areas.
Tie Line Bias	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A mode of Automatic Generation Control that allows the Balancing Authority to 1.) maintain its Interchange Schedule and 2.) respond to Interconnection frequency error.
Time Error	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The difference between the Interconnection time measured at the Balancing Authority(ies) and the time specified by the National Institute of Standards and Technology. Time error is caused by the accumulation of Frequency Error over a given period.

TABLE 1: SUBJECT TO ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Time Error Correction	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An offset to the Interconnection's scheduled frequency to return the Interconnection's Time Error to a predetermined value.
TLR (Transmission Loading Relief) Log <small>(NERC added the spelled out term for TLR Log for clarification purposes.)</small>	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Report required to be filed after every TLR Level 2 or higher in a specified format. The NERC IDC prepares the report for review by the issuing Reliability Coordinator. After approval by the issuing Reliability Coordinator, the report is electronically filed in a public area of the NERC Web site.
Total Flowgate Capability	<a href="#">Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions</a>	TFC	8/22/2008	11/24/2009		The maximum flow capability on a Flowgate, is not to exceed its thermal rating, or in the case of a flowgate used to represent a specific operating constraint (such as a voltage or stability limit), is not to exceed the associated System Operating Limit.
Total Internal Demand	<a href="#">Project 2010-04 Demand Data (MOD C)</a>		5/6/2014	2/19/2015	7/1/2016	The Demand of a metered system, which includes the Firm Demand, plus any controllable and dispatchable DSM Load and the Load due to the energy losses incurred within the boundary of the metered system.
Total Transfer Capability	<a href="#">Version 0 Reliability Standards</a>	TTC	2/8/2005	3/16/2007		The amount of electric power that can be moved or transferred reliably from one area to another area of the interconnected transmission systems by way of all transmission lines (or paths) between those areas under specified system conditions.
Transaction	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		See Interchange Transaction.
Transfer Capability	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The measure of the ability of interconnected electric systems to move or transfer power in a reliable manner from one area to another over all transmission lines (or paths) between those areas under specified system conditions. The units of transfer capability are in terms of electric power, generally expressed in megawatts (MW). The transfer capability from "Area A" to "Area B" is not generally equal to the transfer capability from "Area B" to "Area A."
Transfer Distribution Factor	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		See Distribution Factor.
Transient Cyber Asset	<a href="#">Project 2008-06 Cyber Security Order 706</a>		2/12/2015	1/21/2016	7/1/2016	A Cyber Asset that (i) is capable of transmitting or transferring executable code, (ii) is not included in a BES Cyber System, (iii) is not a Protected Cyber Asset (PCA), and (iv) is directly connected (e.g., using Ethernet, serial, Universal Serial Bus, or wireless, including near field or Bluetooth communication) for 30 consecutive calendar days or less to a BES Cyber Asset, a network within an ESP, or a PCA. Examples include, but are not limited to, Cyber Assets used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.
Transmission	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		An interconnected group of lines and associated equipment for the movement or transfer of electric energy between points of supply and points at which it is transformed for delivery to customers or is delivered to other electric systems.
Transmission Constraint	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		A limitation on one or more transmission elements that may be reached during normal or contingency system operations.
Transmission Customer	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	1. Any eligible customer (or its designated agent) that can or does execute a Transmission Service agreement or can or does receive Transmission Service. 2. Any of the following entities: Generator Owner, Load-Serving Entity, or Purchasing-Selling Entity.
Transmission Line	<a href="#">Project 2007-07 Transmission Vegetation Management</a>		2/7/2006	3/16/2007		A system of structures, wires, insulators and associated hardware that carry electric energy from one point to another in an electric power system. Lines are operated at relatively high voltages varying from 69 kV up to 765 kV, and are capable of transmitting large quantities of electricity over long distances.
Transmission Operator	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	The entity responsible for the reliability of its "local" transmission system, and that operates or directs the operations of the transmission Facilities.
Transmission Operator Area	<a href="#">Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions</a>		8/22/2008	11/24/2009		The collection of Transmission assets over which the Transmission Operator is responsible for operating.
Transmission Owner	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	The entity that owns and maintains transmission Facilities.
Transmission Planner	<a href="#">Project 2015-04 Alignment of Terms</a>		11/5/2015	1/21/2016	7/1/2016	The entity that develops a long-term (generally one year and beyond) plan for the reliability (adequacy) of the interconnected bulk electric transmission systems within its portion of the Planning Authority area.
Transmission Reliability Margin	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The amount of transmission transfer capability necessary to provide reasonable assurance that the interconnected transmission network will be secure. TRM accounts for the inherent uncertainty in system conditions and the need for operating flexibility to ensure reliable system operation as system conditions change.
Transmission Reliability Margin Implementation Document	<a href="#">Project 2006-07 ATC/TTC/AFC and CBM/TRM Revisions</a>		8/22/2008	11/24/2009		A document that describes the implementation of a Transmission Reliability Margin methodology, and provides information related to a Transmission Operator's calculation of TRM.
Transmission Service	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		Services provided to the Transmission Customer by the Transmission Service Provider to move energy from a Point of Receipt to a Point of Delivery.
Transmission Service Provider	<a href="#">Project 2015-04 Alignment of Terms</a>	TSP	11/5/2015	1/21/2016	7/1/2016	The entity that administers the transmission tariff and provides Transmission Service to Transmission Customers under applicable Transmission Service agreements.
Vegetation	<a href="#">Project 2007-07 Transmission Vegetation Management</a>		2/7/2006	3/16/2007		All plant material, growing or not, living or dead.
Vegetation Inspection	<a href="#">Project 2010-07</a>		5/9/2012	3/21/2013	7/1/2014	The systematic examination of vegetation conditions on a Right-of-Way and those vegetation conditions under the applicable Transmission Owner's or applicable Generator Owner's control that are likely to pose a hazard to the line(s) prior to the next planned maintenance or inspection. This may be combined with a general line inspection.
Wide Area	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		The entire Reliability Coordinator Area as well as the critical flow and status information from adjacent Reliability Coordinator Areas as determined by detailed system studies to allow the calculation of Interconnected Reliability Operating Limits.
Year One	<a href="#">Project 2010-10 FAC Order 729</a>		1/24/2011	11/17/2011		The first twelve month period that a Planning Coordinator or a Transmission Planner is responsible for assessing. For an assessment started in a given calendar year, Year One includes the forecasted peak Load period for one of the following two calendar years. For example, if a Planning Assessment was started in 2011, then Year One includes the forecasted peak Load period for either 2012 or 2013.

TABLE 2: PENDING ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Actual Frequency (F <sub>a</sub> )	<a href="#">Project 2010-14.2.1.Phase 2</a>		2/11/2016			The Interconnection frequency measured in Hertz (Hz).
Actual Net Interchange (NI <sub>a</sub> )	<a href="#">Project 2010-14.2.1.Phase 2</a>		2/11/2016			The algebraic sum of actual megawatt transfers across all Tie Lines, including Pseudo-Ties, to and from all Adjacent Balancing Authority areas within the same Interconnection. Actual megawatt transfers on asynchronous DC tie lines that are directly connected to another Interconnection are excluded from Actual Net Interchange.
Automatic Generation Control	<a href="#">Project 2010-14.2.1.Phase 2</a>	AGC	2/11/2016			A process designed and used to adjust a Balancing Authority Areas' Demand and resources to help maintain the Reporting ACE in that of a Balancing Authority Area within the bounds required by applicable NERC Reliability Standards.
Automatic Time Error Correction (I <sub>ATEC</sub> ) <i>continued below...</i>	<a href="#">Project 2010-14.2.1.Phase 2</a>		2/11/2016			<p>The addition of a component to the ACE equation for the Western Interconnection that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error. Automatic Time Error Correction is only applicable in the Western Interconnection.</p> <p><math display="block">I_{ATEC} = \frac{PII_{hourly}^{on/offpeak}}{(1-Y)H}</math> when operating in Automatic Time error correction Mode. The absolute value of I<sub>ATEC</sub> shall not exceed L<sub>max</sub>.  I<sub>ATEC</sub> shall be zero when operating in any other AGC mode.</p> <ul style="list-style-type: none"> <li>L<sub>max</sub> is the maximum value allowed for I<sub>ATEC</sub> Set by each BA between 0.2 *  B<sub>i</sub>  and L<sub>10</sub>, 0.2 *  B<sub>i</sub>  ≤ L<sub>max</sub> ≤ L<sub>10</sub>.</li> <li>L<sub>10</sub> = 1.65 ε<sub>10</sub> √((-10B<sub>i</sub>)(-10B<sub>s</sub>)).</li> <li>ε<sub>10</sub> is a constant derived from the targeted frequency bound. It is the targeted root-mean-square (RMS) value of ten-minute average frequency error based on frequency performance over a given year. The bound, ε<sub>10</sub>, is the same for every Balancing Authority Area within an interconnection.</li> <li>Y = B<sub>i</sub> / B<sub>s</sub>.</li> <li>H = Number of hours used to payback primary inadvertent interchange energy. The value of H is set to 3.</li> <li>B<sub>i</sub> = Frequency Bias Setting for the Balancing Authority Area (MW / 0.1 Hz).</li> <li>B<sub>s</sub> = Sum of the minimum Frequency Bias Settings for the Interconnection (MW / 0.1 Hz).</li> <li>Primary Inadvertent Interchange (PII<sub>hourly</sub>) is (1-Y) * (I<sub>actual</sub> - B<sub>i</sub> * ΔTE/6)</li> <li>I<sub>actual</sub> is the hourly Inadvertent Interchange for the last hour.  ΔTE is the hourly change in system Time Error as distributed by the Interconnection time monitor, where: ΔTE = TE<sub>end hour</sub> - TE<sub>begin hour</sub> - TD<sub>adj</sub> - (t) * (TE<sub>offset</sub>)</li> </ul>
Automatic Time Error Correction (I <sub>ATEC</sub> )	<a href="#">Project 2010-14.2.1.Phase 2</a>		2/11/2016			<ul style="list-style-type: none"> <li>TD<sub>adj</sub> is the Reliability Coordinator adjustment for differences with Interconnection time monitor control center clocks.</li> <li>t is the number of minutes of manual Time Error Correction that occurred during the hour.</li> <li>TE<sub>offset</sub> is 0.000 or +0.020 or -0.020.</li> <li>PII<sub>accum</sub> is the Balancing Authority Area's accumulated PII hourly in MWh. An On-Peak and Off-Peak accumulation accounting is required, where:  <math display="block">PII_{accum}^{on/offpeak} = \text{last period's } PII_{accum}^{on/offpeak} + PII_{hourly}</math></li> </ul>
Balancing Authority	<a href="#">Project 2010-14.2.1.Phase 2</a>		2/11/2016			The responsible entity that integrates resource plans ahead of time, maintains Demand and resource balance within a Balancing Authority Area, and supports Interconnection frequency in real time.
Balancing Contingency Event	<a href="#">Project 2010-14.1.Phase 1</a>		11/5/2015			<p>Any single event described in Subsections (A), (B), or (C) below, or any series of such otherwise single events, with each separated from the next by one minute or less.</p> <p>A. Sudden loss of generation:</p> <ol style="list-style-type: none"> <li>Due to <ol style="list-style-type: none"> <li>unit tripping, or</li> <li>loss of generator Facility resulting in isolation of the generator from the Bulk Electric System or from the responsible entity's System, or</li> <li>sudden unplanned outage of transmission Facility;</li> </ol> </li> <li>And, that causes an unexpected change to the responsible entity's ACE;</li> </ol> <p>B. Sudden loss of an Import, due to forced outage of transmission equipment that causes an unexpected imbalance between generation and Demand on the Interconnection.</p> <p>C. Sudden restoration of a Demand that was used as a resource that causes an unexpected change to the responsible entity's ACE.</p>
Contingency Event Recovery Period	<a href="#">Project 2010-14.1.Phase 1</a>		11/5/2015			A period that begins at the time that the resource output begins to decline within the first one-minute interval of a Reportable Balancing Contingency Event, and extends for fifteen minutes thereafter.
Contingency Reserve	<a href="#">Project 2010-14.1.Phase 1</a>		11/5/2015			<p>The provision of capacity that may be deployed by the Balancing Authority to respond to a Balancing Contingency Event and other contingency requirements (such as Energy Emergency Alerts as specified in the associated EOP standard). A Balancing Authority may include in its restoration of Contingency Reserve readiness to reduce Firm Demand and include it if, and only if, the Balancing Authority:</p> <ul style="list-style-type: none"> <li>is experiencing a Reliability Coordinator declared Energy Emergency Alert level, and is utilizing its Contingency Reserve to mitigate an operating emergency in accordance with its emergency Operating Plan.</li> <li>is utilizing its Contingency Reserve to mitigate an operating emergency in accordance with its emergency Operating Plan.</li> </ul>
Contingency Reserve Restoration Period	<a href="#">Project 2010-14.1.Phase 1</a>		11/5/2015			A period not exceeding 90 minutes following the end of the Contingency Event Recovery Period.
Energy Emergency	<a href="#">Version 0</a>		11/13/2014	11/19/2015	4/1/2017	A condition when a Load-Serving Entity or Balancing Authority has exhausted all other resource options and can no longer meet its expected Load obligations.
Geomagnetic Disturbance Vulnerability Assessment or GMD Vulnerability Assessment	<a href="#">Project 2013-03 Geomagnetic Disturbance Mitigation</a>	GMD	12/17/2014	9/22/2016	7/1/2017	Documented evaluation of potential susceptibility to voltage collapse, cascading, or localized damage of equipment due to geomagnetic disturbances.

TABLE 2: PENDING ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Interchange Meter Error ( $I_{ME}$ )	<a href="#">Project 2010-14.2.1 Phase 2</a>		2/11/2016			A term used in the Reporting ACE calculation to compensate for data or equipment errors affecting any other components of the Reporting ACE calculation.
Most Severe Single Contingency	<a href="#">Project 2010-14.1 Phase 1</a>	MSSC	11/5/2015			The Balancing Contingency Event, due to a single contingency identified using system models maintained within the Reserve Sharing Group (RSG) or a Balancing Authority's area that is not part of a Reserve Sharing Group, that would result in the greatest loss (measured in MW) of resource output used by the RSG or a Balancing Authority that is not participating as a member of a RSG at the time of the event to meet Firm Demand and export obligation (excluding export obligation for which Contingency Reserve obligations are being met by the Sink Balancing Authority).
Operational Planning Analysis	<a href="#">Project 2008-12 Coordinate Interchange Standards</a>	OPA	11/13/2014	11/19/2015	1/1/2017	An evaluation of projected system conditions to assess anticipated (pre Contingency) and potential (post-Contingency) conditions for next-day operations. The evaluation shall reflect applicable inputs including, but not limited to, load forecasts; generation output levels; Interchange; known Protection System and Special Protection System status or degradation; Transmission outages; generator outages; Facility Ratings; and identified phase angle and equipment limitations. (Operational Planning Analysis may be provided through internal systems or through third-party services.)
Operational Planning Analysis	<a href="#">Project 2007-06 Phase 2 of System Protection</a>	OPA	8/11/2016			(pre Contingency) and potential (post Contingency) conditions for next day operations. The evaluation shall reflect applicable inputs including, but not limited to: load forecasts; generation output levels; Interchange; known Protection System and Remedial Action Scheme status or degradation, functions, and limitations; Transmission outages; generator outages; Facility Ratings; and identified phase angle and equipment limitations. (Operational Planning Analysis may be provided through internal systems or through third party services.)
Pre-Reporting Contingency Event ACE Value	<a href="#">Project 2010-14.1 Phase 1</a>		11/5/2015			The average value of Reporting ACE, or Reserve Sharing Group Reporting ACE when applicable, in the 16-second interval immediately prior to the start of the Contingency Event Recovery Period based on EMS scan rate data.
Protection System Coordination Study	<a href="#">Project 2007-06 System Protection Coordination</a>		11/5/2015			An analysis to determine whether Protection Systems operate in the intended sequence during Faults.
Pseudo-Tie	<a href="#">Project 2010-14.2.1 Phase 2</a>		2/11/2016			A time-varying energy transfer that is updated in Real-time and included in the Actual Net Interchange term (NIA) in the same manner as a Tie Line in the affected Balancing Authorities' Reporting ACE equation (or alternate control processes).
Real-time Assessment	<a href="#">Operate Within Interconnection Reliability Operating Limits</a>		11/13/2014	Revised definition. 11/19/2015	1/1/2017	An evaluation of system conditions using real-time data to assess existing (pre-Contingency) and potential (post-Contingency) operating conditions. The assessment shall reflect applicable inputs including, but not limited to: load; generation output levels, known Protection System and Special Protection System status or degradation, Transmission outages, generator outages, Interchange, Facility Ratings, and identified phase angle and equipment limitations. (Real-time Assessment may be provided through internal systems or through third-party services.)
Real-time Assessment	<a href="#">Project 2007-06.2 Phase 2 of System Protection Coordination</a>	RTA	8/11/2016			(pre Contingency) and potential (post Contingency) operating conditions. The assessment shall reflect applicable inputs including, but not limited to: load; generation output levels; known Protection System and Remedial Action Scheme status or degradation, functions, and limitations; Transmission outages; generator outages; Interchange; Facility Ratings; and identified phase angle and equipment limitations. (Realtime Assessment may be provided through internal systems or through third party services.)
Remedial Action Scheme	<a href="#">Project 2010-05.3</a>	RAS	11/13/2014	11/19/2015	4/1/2017	A scheme designed to detect predetermined System conditions and automatically take corrective actions that may include, but are not limited to, adjusting or tripping generation (MW and Mvar), tripping load, or reconfiguring a System(s). RAS accomplish objectives such as: <ul style="list-style-type: none"> <li>• Meet requirements identified in the NERC Reliability Standards;</li> <li>• Maintain Bulk Electric System (BES) stability;</li> <li>• Maintain acceptable BES voltages;</li> <li>• Maintain acceptable BES power flows;</li> <li>• Limit the impact of Cascading or extreme events.</li> </ul> The following do not individually constitute a RAS: <ol style="list-style-type: none"> <li>Protection Systems installed for the purpose of detecting Faults on BES Elements and isolating the faulted Elements</li> <li>Schemes for automatic underfrequency load shedding (UFLS) and automatic undervoltage load shedding (UVLS) comprised of only distributed relays</li> <li>Out-of-step tripping and power swing blocking</li> <li>Automatic reclosing schemes</li> <li>Schemes applied on an Element for non-Fault conditions, such as, but not limited to, generator loss-of-field, transformer top-oil temperature, overvoltage, or overload to protect the Element against damage by removing it from service</li> </ol>
Remedial Action Scheme <i>Continued</i>	<a href="#">Project 2010-05.3</a>	RAS	11/13/2014	11/19/2015	4/1/2017	<ol style="list-style-type: none"> <li>Controllers that switch or regulate one or more of the following: series or shunt reactive devices, flexible alternating current transmission system (FACTS) devices, phase-shifting transformers, variable-frequency transformers, or tap-changing transformers; and, that are located at and monitor quantities solely at the same station as the Element being switched or regulated</li> <li>FACTS controllers that remotely switch static shunt reactive devices located at other stations to regulate the output of a single FACTS device</li> <li>Schemes or controllers that remotely switch shunt reactors and shunt capacitors for voltage regulation that would otherwise be manually switched</li> <li>Schemes that automatically de-energize a line for a non-Fault operation when one end of the line is open</li> <li>Schemes that provide anti-islanding protection (e.g., protect load from effects of being isolated with generation that may not be capable of maintaining acceptable frequency and voltage)</li> <li>Automatic sequences that proceed when manually initiated solely by a System Operator</li> <li>Modulation of HVdc or FACTS via supplementary controls, such as angle damping or frequency damping applied to damp local or inter-area oscillations</li> <li>Sub-synchronous resonance (SSR) protection schemes that directly detect sub-synchronous quantities (e.g., currents or torsional oscillations)</li> </ol>
Remedial Action Scheme <i>Continued</i>	<a href="#">Project 2010-05.3</a>	RAS	11/13/2014	11/19/2015	4/1/2017	<ol style="list-style-type: none"> <li>Generator controls such as, but not limited to, automatic generation control (AGC), generation excitation [e.g. automatic voltage regulation (AVR) and power system stabilizers (PSS)], fast valving, and speed governing</li> </ol>



TABLE 2: PENDING ENFORCEMENT

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Definition
Reportable Balancing Contingency Event	<a href="#">Project 2010-14.1 Phase 1</a>		11/5/2015			Any Balancing Contingency Event occurring within a one-minute interval of an initial sudden decline in ACE based on EMS scan rate data that results in a loss of MW output less than or equal to the Most Severe Single Contingency, and greater than or equal to the lesser amount of: (i) 80% of the Most Severe Single Contingency, or (ii) the amount listed below for the applicable Interconnection. Prior to any given calendar quarter, the 80% threshold may be reduced by the responsible entity upon written notification to the Regional Entity. <ul style="list-style-type: none"> <li>• Eastern Interconnection – 900 MW</li> <li>• Western Interconnection – 500 MW</li> <li>• ERCOT – 800 MW</li> <li>• Quebec – 500 MW</li> </ul>
Reporting ACE	<a href="#">Project 2010-14.2.1 Phase 2</a>		2/11/2016			The scan rate values of a Balancing Authority Area's (BAA) Area Control Error (ACE) measured in MW includes the difference between the Balancing Authority Area's Actual Net Interchange and its Scheduled Net Interchange, plus its Frequency Bias Setting obligation, plus correction for any known meter error. In the Western Interconnection, Reporting ACE includes Automatic Time Error Correction (ATEC). <p>Reporting ACE is calculated as follows:  <math>Reporting\ ACE = (NI_A - NI_S) - 10B (F_A - F_S) - I_{ME}</math></p> <p>Reporting ACE is calculated in the Western Interconnection as follows:  <math>Reporting\ ACE = (NI_A - NI_S) - 10B (F_A - F_S) - I_{ME} + I_{ATEC}</math></p> <p>Where:</p> <ul style="list-style-type: none"> <li>• <math>NI_A</math> = Actual Net Interchange.</li> <li>• <math>NI_S</math> = Scheduled Net Interchange.</li> <li>• <math>B</math> = Frequency Bias Setting.</li> <li>• <math>F_A</math> = Actual Frequency.</li> <li>• <math>F_S</math> = Scheduled Frequency.</li> <li>• <math>I_{ME}</math> = Interchange Meter Error.</li> <li>• <math>I_{ATEC}</math> = Automatic Time Error Correction.</li> </ul>
Reporting ACE (continued)	<a href="#">Project 2010-14.2.1 Phase 2</a>		2/11/2016			All NERC Interconnections operate using the principles of Tie-line Bias (TLB) Control and require the use of an ACE equation similar to the Reporting ACE defined above. Any modification(s) to this specified Reporting ACE equation that is(are) implemented for all BAAs on an interconnection and is(are) consistent with the following four principles of Tie Line Bias control will provide a valid alternative to this Reporting ACE equation: <ol style="list-style-type: none"> <li>1. All portions of the Interconnection are included in exactly one BAA so that the sum of all BAAs' generation, load, and loss is the same as total Interconnection generation, load, and loss;</li> <li>2. The algebraic sum of all BAAs' Scheduled Net Interchange is equal to zero at all times and the sum of all BAAs' Actual Net Interchange values is equal to zero at all times;</li> <li>3. The use of a common Scheduled Frequency <math>F_S</math> for all BAAs at all times; and,</li> <li>4. Excludes metering or computational errors. (The inclusion and use of the <math>I_{ME}</math> term corrects for known metering or computational errors.)</li> </ol>
Reserve Sharing Group Reporting ACE	<a href="#">Project 2010-14.1 Phase 1</a>		11/5/2015			At any given time of measurement for the applicable Reserve Sharing Group (RSG), the algebraic sum of the ACEs (or equivalent as calculated at such time of measurement) of the Balancing Authorities participating in the RSG at the time of measurement.
Scheduled Net Interchange ( $NI_S$ )	<a href="#">Project 2010-14.2.1 Phase 2</a>		2/11/2016			The algebraic sum of all scheduled megawatt transfers, including Dynamic Schedules, to and from all Adjacent Balancing Authority areas within the same Interconnection, including the effect of scheduled ramps. Scheduled megawatt transfers on asynchronous DC tie lines directly connected to another Interconnection are excluded from Scheduled Net Interchange.
Special Protection System (Remedial Action Scheme)	<a href="#">Version 0 Reliability Standards</a>	SPS	5/5/2016	6/23/2016	4/1/2017	See "Remedial Action Scheme"
Undervoltage Load Shedding Program	<a href="#">Project 2008-02 Undervoltage Load Shedding &amp; Underfrequency Load Shedding</a>	UVLS Program	11/13/2014	11/19/2015	4/1/2017	An automatic load shedding program, consisting of distributed relays and controls, used to mitigate undervoltage conditions impacting the Bulk Electric System (BES), leading to voltage instability, voltage collapse, or Cascading. Centrally controlled undervoltage-based load shedding is not included.

TABLE 3: RETIRED TERMS

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Adjacent Balancing Authority	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		9/30/2014	A Balancing Authority Area that is interconnected another Balancing Authority Area either directly or via a multi-party agreement or transmission tariff.
Adverse Reliability Impact	<a href="#">Project 2006-06</a>		8/4/2011	NERC withdrew the related petition 3/18/2015.			The impact of an event that results in Bulk Electric System instability or Cascading.
Area Control Error	<a href="#">Version 0 Reliability Standards</a>	ACE	2/8/2005	3/16/2007		3/31/2014	The instantaneous difference between a Balancing Authority's net actual and scheduled interchange, taking into account the effects of Frequency Bias and correction for meter error.
Arranged Interchange	<a href="#">Coordinate Interchange</a>		5/2/2006	3/16/2007		9/30/2014	The state where the Interchange Authority has received the Interchange information (initial or revised).
ATC Path	<a href="#">Project 2006-07</a>		8/22/2008	Not approved; Modification directed 11/24/2009			Any combination of Point of Receipt and Point of Delivery for which ATC is calculated; and any Posted Path. (See 18 CFR 37.6(b)(1))
Available Transfer Capability	<a href="#">Version 0 Reliability Standards</a>	ATC	2/8/2005	3/16/2007			A measure of the transfer capability remaining in the physical transmission network for further commercial activity over and above already committed uses. It is defined as Total Transfer Capability less existing transmission commitments (including retail customer service), less a Capacity Benefit Margin, less a Transmission Reliability Margin.
BES Cyber Asset	<a href="#">Project 2008-06</a>		11/26/2012	11/22/2013		6/30/2016	A Cyber Asset that if rendered unavailable, degraded, or misused would, within 15 minutes of its required operation, misoperation, or non-operation, adversely impact one or more Facilities, systems, or equipment, which, if destroyed, degraded, or otherwise rendered unavailable when needed, would affect the reliable operation of the Bulk Electric System. Redundancy of affected Facilities, systems, and equipment shall not be considered when determining adverse impact. Each BES Cyber Asset is included in one or more BES Cyber Systems. (A Cyber Asset is not a BES Cyber Asset if, for 30 consecutive calendar days or less, it is directly connected to a network within an ESP, a Cyber Asset within an ESP, or to a BES Cyber Asset, and it is used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.)
Blackstart Capability Plan	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		7/1/2013 Will be retired when EOP-005-2 becomes enforceable	A documented procedure for a generating unit or station to go from a shutdown condition to an operating condition delivering electric power without assistance from the electric system. This procedure is only a portion of an overall system restoration plan.
Blackstart Resource	<a href="#">Project 2006-03</a>		8/5/2009	3/17/2011		6/30/2016	A generating unit(s) and its associated set of equipment which has the ability to be started without support from the System or is designed to remain energized without connection to the remainder of the System, with the ability to energize a bus, meeting the Transmission Operator's restoration plan needs for real and reactive power capability, frequency and voltage control, and that has been included in the Transmission Operator's restoration plan.
Bulk Electric System	<a href="#">Version 0 Reliability Standards</a>	BES	2/8/2005	3/16/2007		6/30/2014	As defined by the Regional Reliability Organization, the electrical generation resources, transmission lines, interconnections with neighboring systems, and associated equipment, generally operated at voltages of 100 kv or higher. Radial transmission facilities serving only load with one transmission source are generally not included in this definition.
Bulk Electric System <small>(FERC issued an order on April 18, 2013 approving the revised definition with an effective date of July 1, 2013. On June 14, 2013, FERC granted NERC's request to extend the effective date of the revised definition of the Bulk Electric System to July 1, 2014.)</small>	<a href="#">Project 2010-17</a>	BES	1/18/2012	6/14/2013		Replaced by BES definition FERC approved 3/20/2014	Unless modified by the lists shown below, all Transmission Elements operated at 100 kv or higher and Real Power and Reactive Power resources connected at 100 kv or higher. This does not include facilities used in the local distribution of electric energy. <b>Inclusions:</b> • I1 - Transformers with the primary terminal and at least one secondary terminal operated at 100 kv or higher unless excluded under Exclusion E1 or E3. • I2 - Generating resource(s) with gross individual nameplate rating greater than 20 MVA or gross plant/facility aggregate nameplate rating greater than 75 MVA including the generator terminals through the high-side of the step-up transformer(s) connected at a voltage of 100 kv or above. • I3 - Blackstart Resources identified in the Transmission Operator's restoration plan. • I4 - Dispersed power producing resources with aggregate capacity greater than 75 MVA (gross aggregate nameplate rating) utilizing a system designed primarily for aggregating capacity, connected at a common point at a voltage of 100 kv or above.
Bulk Electric System (Continued)	<a href="#">Project 2010-17</a>	BES	1/18/2012	6/14/2013		Replaced by BES definition FERC approved 3/20/2014	I5 - Static or dynamic devices (excluding generators) dedicated to supplying or absorbing Reactive Power that are connected at 100 kv or higher, or through a dedicated transformer with a high-side voltage of 100 kv or higher, or through a transformer that is designated in Inclusion I1. <b>Exclusions:</b> • E1 - Radial systems: A group of contiguous transmission Elements that emanates from a single point of connection of 100 kv or higher and: a) Only serves Load. Or, b) Only includes generation resources, not identified in Inclusion I3, with an aggregate capacity less than or equal to 75 MVA (gross nameplate rating). Or, c) Where the radial system serves Load and includes generation resources, not identified in Inclusion I3, with an aggregate capacity of non-retail generation less than or equal to 75 MVA (gross nameplate rating). Note - A normally open switching device between radial systems, as depicted on prints or one-line diagrams for example, does not affect this exclusion.
Bulk Electric System (Continued)	<a href="#">Project 2010-17</a>	BES	1/18/2012	6/14/2013		Replaced by BES definition FERC approved 3/20/2014	• E2 - A generating unit or multiple generating units on the customer's side of the retail meter that serve all or part of the retail Load with electric energy if: (i) the net capacity provided to the BES does not exceed 75 MVA, and (ii) standby, back-up, and maintenance power services are provided to the generating unit or multiple generating units or to the retail Load by a Balancing Authority, or provided pursuant to a binding obligation with a Generator Owner or Generator Operator, or under terms approved by the applicable regulatory authority. • E3 - Local networks (LN): A group of contiguous transmission Elements operated at or above 100 kv but less than 300 kv that distribute power to Load rather than transfer bulk power across the interconnected system. LN's emanate from multiple points of connection at 100 kv or higher to improve the level of service to retail customer Load and not to accommodate bulk power transfer across the interconnected system. The LN is characterized by all of the following: a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusion I3 and do not have an aggregate capacity of non-retail generation greater than 75 MVA (gross nameplate rating); b) Power flows only into the LN and the LN does not transfer energy originating outside the LN for delivery through the LN; and c) Not part of a Flowgate or transfer path: The LN does not contain a monitored Facility of a permanent Flowgate in the Eastern Interconnection, a major transfer path within the Western Interconnection, or a comparable monitored Facility in the ERCOT or Quebec Interconnections, and is not a monitored Facility included in an Interconnection Reliability Operating Limit (IROL). • E4 - Reactive Power devices owned and operated by the retail customer solely for its own use. Note - Elements may be included or excluded on a case-by-case basis through the Rules of Procedure exception process.
Bulk Electric System (Continued)	<a href="#">Project 2010-17</a>	BES	1/18/2012	6/14/2013		Replaced by BES definition FERC approved 3/20/2014	a) Limits on connected generation: The LN and its underlying Elements do not include generation resources identified in Inclusion I3 and do not have an aggregate capacity of non-retail generation greater than 75 MVA (gross nameplate rating); b) Power flows only into the LN and the LN does not transfer energy originating outside the LN for delivery through the LN; and c) Not part of a Flowgate or transfer path: The LN does not contain a monitored Facility of a permanent Flowgate in the Eastern Interconnection, a major transfer path within the Western Interconnection, or a comparable monitored Facility in the ERCOT or Quebec Interconnections, and is not a monitored Facility included in an Interconnection Reliability Operating Limit (IROL). • E4 - Reactive Power devices owned and operated by the retail customer solely for its own use. Note - Elements may be included or excluded on a case-by-case basis through the Rules of Procedure exception process.
Bulk-Power System	<a href="#">Project 2012-08.1 Phase 1</a>		5/9/2013	7/9/2013		6/30/2016	A) facilities and control systems necessary for operating an interconnected electric energy transmission network (or any portion thereof); and B) electric energy from generation facilities needed to maintain transmission system reliability. The term does not include facilities used in the local distribution of electric energy.
Business Practices	<a href="#">Project 2006-07</a>		8/22/2008	Not approved; Modification directed 11/24/2009			Those business rules contained in the Transmission Service Provider's applicable tariff, rules, or procedures; associated Regional Reliability Organization or regional entity business practices; or NAEBS Business Practices.
Cascading	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		6/30/2016	The uncontrolled successive loss of system elements triggered by an incident at any location. Cascading results in widespread electric service interruption that cannot be restrained from sequentially spreading beyond an area predetermined by studies.

TABLE 3: RETIRED TERMS

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Cascading Outages	<a href="#">Determine Facility Ratings, Operating Limits, and Transfer Capabilities</a>		11/1/2006 Withdrawn 2/12/2008			FERC Remanded 12/27/2007	The uncontrolled successive loss of Bulk Electric System Facilities triggered by an incident (or condition) at any location resulting in the interruption of electric service that cannot be restrained from spreading beyond a pre-determined area.
Confirmed Interchange	<a href="#">Coordinate Interchange</a>		5/2/2006	3/16/2007			The state where the Interchange Authority has verified the Arranged Interchange.
Critical Assets	<a href="#">Cyber Security (Permanent)</a>		5/2/2006	1/18/2008		6/30/2016	Facilities, systems, and equipment which, if destroyed, degraded, or otherwise rendered unavailable, would affect the reliability or operability of the Bulk Electric System.
Critical Cyber Assets	<a href="#">Cyber Security (Permanent)</a>		5/2/2006	1/18/2008		6/30/2016	Cyber Assets essential to the reliable operation of Critical Assets.
Cyber Assets	<a href="#">Cyber Security (Permanent)</a>		5/2/2006	1/18/2008		6/30/2016	Programmable electronic devices and communication networks including hardware, software, and data.
Cyber Security Incident	<a href="#">Cyber Security (Permanent)</a>		5/2/2006	1/18/2008		6/30/2016	Any malicious act or suspicious event that: • Compromises, or was an attempt to compromise, the Electronic Security Perimeter or Physical Security Perimeter of a Critical Cyber Asset, or, • Disrupts, or was an attempt to disrupt, the operation of a Critical Cyber Asset.
Demand-Side Management	<a href="#">Version 0 Reliability Standards</a>	DSM	2/8/2005	3/16/2007		6/30/2016	The term for all activities or programs undertaken by a Load-Serving Entity or its customers to influence the amount or timing of electricity they use.
Distribution Provider	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		6/30/2016	Provides and operates the "wires" between the transmission system and the end-use customer. For those end-use customers who are served at transmission voltages, the Transmission Owner also serves as the Distribution Provider. Thus, the Distribution Provider is not defined by a specific voltage, but rather as performing the Distribution function at any voltage.
Dynamic Interchange Schedule or Dynamic Schedule	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		9/30/2014	A telemetered reading or value that is updated in real time and used as a schedule in the AGC/ACE equation and the integrated value of which is treated as a schedule for interchange accounting purposes. Commonly used for scheduling jointly owned generation to or from another Balancing Authority Area.
Electronic Security Perimeter	<a href="#">Cyber Security (Permanent)</a>	ESP	5/2/2006	1/18/2008		6/30/2016	The logical border surrounding a network to which Critical Cyber Assets are connected and for which access is controlled.
Element	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		6/30/2016	Any electrical device with terminals that may be connected to other electrical devices such as a generator, transformer, circuit breaker, bus section, or transmission line. An element may be comprised of one or more components.
Energy Emergency	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007			A condition when a Load-Serving Entity has exhausted all other options and can no longer provide its customers' expected energy requirements.
Flowgate	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007			A designated point on the transmission system through which the Interchange Distribution Calculator calculates the power flow from Interchange Transactions.
Frequency Bias Setting	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		3/31/2015	A value, usually expressed in MW/0.1 Hz, set into a Balancing Authority ACE algorithm that allows the Balancing Authority to contribute its frequency response to the Interconnection.
Generator Operator		GOP	2/8/2005	3/16/2007		6/30/2016	The entity that operates generating unit(s) and performs the functions of supplying energy and Interconnected Operations Services.
Generator Owner		GO	2/8/2005	3/16/2007		6/30/2016	Entity that owns and maintains generating units.
Interchange Authority		IA	5/2/2006	3/16/2007		6/30/2016	The responsible entity that authorizes implementation of valid and balanced Interchange Schedules between Balancing Authority Areas, and ensures communication of Interchange information for reliability assessment purposes.
Interconnected Operations Service	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007			A service (exclusive of basic energy and transmission services) that is required to support the reliable operation of interconnected Bulk Electric Systems.
Interconnection	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		6/30/2016	When capitalized, any one of the three major electric system networks in North America: Eastern, Western, and ERCOT.
Interconnection	<a href="#">Project 2010-14.1 Phase 1</a>		8/15/2013	4/16/2015			When capitalized, any one of the four major electric system networks in North America: Eastern, Western, ERCOT and Quebec.
Interconnection Reliability Operating Limit	<a href="#">Version 0 Reliability Standards</a>	IROL	2/8/2005	3/16/2007		12/27/2007	The value (such as MW, MVar, Amperes, Frequency or Volts) derived from, or a subset of the System Operating Limits, which if exceeded, could expose a widespread area of the Bulk Electric System to instability, uncontrolled separation(s) or cascading outages.
Intermediate Balancing Authority	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007			A Balancing Authority Area that has connecting facilities in the Scheduling Path between the Sending Balancing Authority Area and Receiving Balancing Authority Area and operating agreements that establish the conditions for the use of such facilities.
Load-Serving Entity	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007			Secures energy and transmission service (and related interconnected Operations Services) to serve the electrical demand and energy requirements of its end-use customers.
Misoperation	<a href="#">Phase III - IV Planning Standards - Archive</a>		2/7/2006	3/16/2007		6/30/2016	<ul style="list-style-type: none"> <li>Any failure of a Protection System element to operate within the specified time when a fault or abnormal condition occurs within a zone of protection.</li> <li>Any operation for a fault not within a zone of protection (other than operation as backup protection for a fault in an adjacent zone that is not cleared within a specified time for the protection for that zone).</li> <li>Any unintentional Protection System operation when no fault or other abnormal condition has occurred unrelated to on-site maintenance and testing activity.</li> </ul>
Operational Planning Analysis	<a href="#">Operate Within Interconnection Reliability Operating Limits</a>		10/17/2008	3/17/2011		9/30/2014	An analysis of the expected system conditions for the next day's operation. (That analysis may be performed either a day ahead or as much as 12 months ahead.) Expected system conditions include things such as load forecast(s), generation output levels, and known system constraints (transmission facility outages, generator outages, equipment limitations, etc.).
Physical Security Perimeter	<a href="#">Cyber Security (Permanent)</a>	PSP	5/2/2006	1/18/2008		6/30/2016	The physical, completely enclosed ("six-wall") border surrounding computer rooms, telecommunications rooms, operations centers, and other locations in which Critical Cyber Assets are housed and for which access is controlled.
Planning Authority	<a href="#">Version 0 Reliability Standards</a>	PA	2/8/2005	3/16/2007			The responsible entity that coordinates and integrates transmission facility and service plans, resource plans, and protection systems.
Point of Receipt	<a href="#">Version 0 Reliability Standards</a>	POR	2/8/2005	3/16/2007		6/30/2016	A location that the Transmission Service Provider specifies on its transmission system where an Interchange Transaction enters or a Generator delivers its output.
Postback	<a href="#">Project 2006-07 ATC/TTC/AEC and CBM/TRM Revisions</a>		8/22/2008	Not approved: Modification directed 11/24/09			Positive adjustments to ATC or AFC as defined in Business Practices. Such Business Practices may include processing of redirects and unscheduled service.
Protected Cyber Assets	<a href="#">Project 2008-06 Cyber Security Order 706</a>	PCA	11/26/2012	11/22/2013		6/30/2016	One or more Cyber Assets connected using a routable protocol within or on an Electronic Security Perimeter that is not part of the highest impact BES Cyber System within the same Electronic Security Perimeter. The impact rating of Protected Cyber Assets is equal to the highest rated BES Cyber System in the same ESP. A Cyber Asset is not a Protected Cyber Asset if, for 30 consecutive calendar days or less, it is connected either to a Cyber Asset within the ESP or to the network within the ESP, and it is used for data transfer, vulnerability assessment, maintenance, or troubleshooting purposes.
Protection System	<a href="#">Phase III-IV Planning Standards - Archive</a>		2/7/2006	3/17/2007		4/1/2013	Protective relays, associated communication systems, voltage and current sensing devices, station batteries and DC control circuitry.
Protection System Maintenance Program (PRC-005-2)	<a href="#">Project 2007-17 Protection System Maintenance and Testing</a>	PSMP	11/7/2012	12/19/2013		4/1/2015	An ongoing program by which Protection System components are kept in working order and proper operation of malfunctioning components is restored. A maintenance program for a specific component includes one or more of the following activities: Verify — Determine that the component is functioning correctly. Monitor — Observe the routine in-service operation of the component. Test — Apply signals to a component to observe functional performance or output behavior, or to diagnose problems. Inspect — Examine for signs of component failure, reduced performance or degradation. Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.

TABLE 3: RETIRED TERMS

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Protection System Maintenance Program (PRC-005-3)	<a href="#">Project 2007-17.2 Protection System Maintenance and Testing - Phase 2</a>	PSMP	11/7/2013	1/22/2015	4/1/2016		An ongoing program by which Protection System and automatic reclosing components are kept in working order and proper operation of malfunctioning components is restored. A maintenance program for a specific component includes one or more of the following activities: Verify — Determine that the component is functioning correctly. Monitor — Observe the routine in-service operation of the component. Test — Apply signals to a component to observe functional performance or output behavior, or to diagnose problems. Inspect — Examine for signs of component failure, reduced performance or degradation. Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.
Protection System Maintenance Program (PRC-005-4)	<a href="#">Project 2014-01 Standards, Applicability for Dispersed, Generation Resources</a>	PSMP	11/13/2014	9/17/2015	1/1/2016		An ongoing program by which Protection System, Automatic Reclosing, and Sudden Pressure Relaying Components are kept in working order and proper operation of malfunctioning Components is restored. A maintenance program for a specific Component includes one or more of the following activities: • Verify — Determine that the Component is functioning correctly. • Monitor — Observe the routine in-service operation of the Component. • Test — Apply signals to a Component to observe functional performance or output behavior, or to diagnose problems. • Inspect — Examine for signs of Component failure, reduced performance or degradation. • Calibrate — Adjust the operating threshold or measurement accuracy of a measuring element to meet the intended performance requirement.
Pseudo-Tie	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007			A telemetered reading or value that is updated in real time and used as a "virtual" tie line flow in the AGC/ACE equation but for which no physical tie or energy metering actually exists. The integrated value is used as a metered MWh value for interchange accounting purposes.
Reactive Power	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		6/30/2016	The portion of electricity that establishes and sustains the electric and magnetic fields of alternating-current equipment. Reactive power must be supplied to most types of magnetic equipment, such as motors and transformers. It also must supply the reactive losses on transmission facilities. Reactive power is provided by generators, synchronous condensers, or electrostatic equipment such as capacitors and directly influences electric system voltage. It is usually expressed in kilovars (kvar) or megavars (Mvar).
Real Power	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007			The portion of electricity that supplies energy to the load.
Reallocation	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007			The total or partial curtailment of Transactions during TLR Level 3a or 5a to allow Transactions using higher priority to be implemented.
Real-time Assessment	<a href="#">Operate Within Interconnection Reliability Operating Limits</a>		10/17/2008	3/17/2011		12/31/2016	An examination of existing and expected system conditions, conducted by collecting and reviewing immediately available data
Reliability Coordinator	<a href="#">Version 0 Reliability Standards</a>	RC	2/8/2005	3/16/2007		6/30/2007	The entity that is the highest level of authority who is responsible for the reliable operation of the Bulk Electric System, has the Wide Area view of the Bulk Electric System, and has the operating tools, processes and procedures, including the authority to prevent or mitigate emergency operating situations in both next-day analysis and real-time operations. The Reliability Coordinator has the purview that is broad enough to enable the calculation of interconnection Reliability Operating Limits, which may be based on the operating parameters of transmission systems beyond any Transmission Operator's vision.
Reliability Directive	<a href="#">Project 2006-06 Reliability Coordination</a>		8/16/2012	11/19/2015		11/19/2015	A communication initiated by a Reliability Coordinator, Transmission Operator, or Balancing Authority where action by the recipient is necessary to address an Emergency or Adverse Reliability Impact.
Reliability Standard	<a href="#">Project 2012-08-1 Phase 1 of Glossary Updates: Statutory Definitions</a>		5/9/2013	7/9/2013		6/30/2016	A requirement, approved by the United States Federal Energy Regulatory Commission under this Section 215 of the Federal Power Act, or approved or recognized by an applicable governmental authority in other jurisdictions, to provide for reliable operation [Reliable Operation] of the bulk-power system [Bulk-Power System]. The term includes requirements for the operation of existing bulk-power system [Bulk-Power System] facilities, including cybersecurity protection, and the design of planned additions or modifications to such facilities to the extent necessary to provide for reliable operation [Reliable Operation] of the bulk-power system [Bulk-Power System], but the term does not include any requirement to enlarge such facilities or to construct new transmission capacity or generation capacity.
Reliable Operation	<a href="#">Project 2012-08-1 Phase 1 of Glossary Updates: Statutory Definitions</a>		5/9/2013	7/9/2013		6/30/2016	Operating the elements of the bulk-power system [Bulk-Power System] within equipment and electric system thermal, voltage, and stability limits so that instability, uncontrolled separation, or cascading failures of such system will not occur as a result of a sudden disturbance, including a cybersecurity incident, or unanticipated failure of system elements.
Reporting Aco			8/15/2013	4/16/2015 (Will not go into effect)			The scan rate values of a Balancing Authority's Area Control Error (ACE) measured in MW, which includes the difference between the Balancing Authority's Net Actual Interchange and its Net Scheduled Interchange, plus its Frequency Bias obligation, plus any known meter error. In the Western Interconnection, Reporting ACE includes Automatic Time Error Correction (ATEC).  Reporting ACE is calculated as follows: Reporting ACE = (N <sub>A</sub> - N <sub>S</sub> ) - 10B (F <sub>A</sub> - F <sub>S</sub> ) - I <sub>ACE</sub>  Reporting ACE is calculated in the Western Interconnection as follows: Reporting ACE = (N <sub>A</sub> - N <sub>S</sub> ) - 10B (F <sub>A</sub> - F <sub>S</sub> ) - I <sub>ACE</sub> + I <sub>ATEC</sub>  Where: N <sub>A</sub> (Actual Net Interchange) is the algebraic sum of all scheduled megawatt transfers across all Tie Lines and includes Pseudo-Ties. Balancing Authorities directly connected via asynchronous ties to another Interconnection may include or exclude megawatt transfers on those Tie lines in their actual interchange, provided they are implemented in the same manner for Net Interchange Schedule. N <sub>S</sub> (Scheduled Net Interchange) is the algebraic sum of all scheduled megawatt transfers, including Dynamic Schedules, with adjacent Balancing Authorities, and taking into account the effects of schedule ramps. Balancing Authorities directly connected via asynchronous ties to another Interconnection may include or exclude megawatt transfers on those Tie Lines in their scheduled interchange, provided they are implemented in the same manner for Net

TABLE 3: RETIRED TERMS

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Reporting Ace (Continued)			8/15/2013	4/16/2015 (Will not go into effect)			<p>Interchange Actual.</p> <p><b>B (Frequency Bias Setting)</b> is the Frequency Bias Setting (in negative MW/0.1 Hz) for the Balancing Authority.</p> <p><b>K</b> is the constant factor that converts the frequency bias setting units to MW/Hz.</p> <p><b>F<sub>a</sub> (Actual Frequency)</b> is the measured frequency in Hz.</p> <p><b>F<sub>s</sub> (Scheduled Frequency)</b> is 60.0 Hz, except during a time correction.</p> <p><b>I<sub>int</sub> (Interchange Meter Error)</b> is the meter error correction factor and represents the difference between the integrated hourly average of the net interchange actual (NIA) and the cumulative hourly net interchange energy measurement (in megawatt-hours).</p> <p><b>I<sub>ATEC</sub> (Automatic Time Error Correction)</b> is the addition of a component to the ACE equation for the Western Interconnection that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error. Automatic Time Error Correction is only applicable in the Western Interconnection.</p> $I_{ATEC} = \frac{PI_{hourly}^{peak} + BS}{(1 - Y) / H}$ <p><b>I<sub>ATEC</sub></b> shall be zero when operating in any other AGC mode.</p> <ul style="list-style-type: none"> <li>• Y = B / BS.</li> <li>• H = Number of hours used to payback Primary Inadvertent Interchange energy. The value of H is set to 3.</li> <li>• BS = Frequency Bias for the Interconnection (MW / 0.1 Hz).</li> </ul>
Reporting Ace (Continued)							<ul style="list-style-type: none"> <li>• Primary Inadvertent Interchange (PI<sub>hourly</sub>) is (1-Y)</li> <li>• (I<sub>actual</sub> - B * ΔTE/6)</li> <li>• I<sub>actual</sub> is the hourly Inadvertent Interchange for the last hour.</li> <li>• ΔTE is the hourly change in system Time Error as distributed by the Interconnection Time Monitor. Where: ΔTE = TE<sub>end hour</sub> - TE<sub>begin hour</sub> - TD<sub>adj</sub> - (I) * (TE<sub>offset</sub>)</li> <li>• TD<sub>adj</sub> is the Reliability Coordinator adjustment for differences with Interconnection Time Monitor control center clocks.</li> <li>• t is the number of minutes of Manual Time Error Correction that occurred during the hour.</li> <li>• TE<sub>offset</sub> is 0.000 or +0.020 or -0.020.</li> <li>• PI<sub>accum</sub> is the Balancing Authority's accumulated PI<sub>hourly</sub> in MWh. An On-Peak and Off-Peak accumulation accounting is required.</li> </ul> <p>Where:</p> $PI_{accum}^{on/peak} = \text{last period's } PI_{accum}^{on/peak} + PI_{hourly}^{on/peak}$ <p>All NERC Interconnections with multiple Balancing Authorities operate using the principles of Tie-line Bias (TLB) Control and require the use of an ACE equation similar to the Reporting ACE defined above. Any modification(s) to this specified Reporting ACE equation that is/are implemented for all BAs on an Interconnection and is/are consistent with the following four principles will provide a valid alternative Reporting ACE equation</p>
Reporting Ace (Continued)			8/15/2013	4/16/2015 (Will not go into effect)			<p>consistent with the measures included in this standard.</p> <ol style="list-style-type: none"> <li>1. All portions of the Interconnection are included in one area or another so that the sum of all area generation, loads and losses is the same as total system generation, load and losses.</li> <li>2. The algebraic sum of all area Net Interchange Schedules and all Net Interchange actual values is equal to zero at all times.</li> <li>3. The use of a common Scheduled Frequency F<sub>s</sub> for all areas at all times.</li> <li>4. The absence of metering or computational errors. (The inclusion and use of the IME term to account for known metering or computational errors.)</li> </ol>
Request for Interchange	<a href="#">Coordinate Interchange</a>	RFI	5/2/2006	3/16/2007			A collection of data as defined in the NAESB RFI Datasheet, to be submitted to the Interchange Authority for the purpose of implementing bilateral Interchange between a Source and Sink Balancing Authority.
Reserve Sharing Group	<a href="#">Version 0 Reliability Standards</a>	RSG	2/8/2005	3/16/2007		6/30/2016	A group whose members consist of two or more Balancing Authorities that collectively maintain, allocate, and supply operating reserves required for each Balancing Authority's use in recovering from contingencies within the group. Scheduling energy from an Adjacent Balancing Authority to aid recovery need not constitute reserve sharing provided the transaction is ramped in over a period the supplying party could reasonably be expected to load generation in (e.g., ten minutes). If the transaction is ramped in quicker (e.g., between zero and ten minutes) then, for the purposes of Disturbance Control Performance, the Areas become a Reserve Sharing Group.
Resource Planner	<a href="#">Version 0 Reliability Standards</a>	RP	2/8/2005	3/16/2007			The entity that develops a long-term (generally one year and beyond) plan for the resource adequacy of specific loads (customer demand and energy requirements) within a Planning Authority Area.
Right-of-Way	<a href="#">Project 2007-07</a>	ROW	2/7/2006	3/16/2007			A corridor of land on which electric lines may be located. The Transmission Owner may own the land in fee, own an easement, or have certain franchise, prescription, or license rights to construct and maintain lines.
Right-of-Way	<a href="#">Project 2007-07</a>	ROW	11/3/2011	3/21/2013		6/30/2014	The corridor of land under a transmission line(s) needed to operate the line(s). The width of the corridor is established by engineering or construction standards as documented in either construction documents, pre-2007 vegetation maintenance records, or by the blowout standard in effect when the line was built. The ROW width in no case exceeds the Transmission Owner's legal rights but may be less based on the aforementioned criteria.
Sink Balancing Authority	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		9/30/2014	The Balancing Authority in which the load (sink) is located for an Interchange Transaction. (This will also be a Receiving Balancing Authority for the resulting Interchange Schedule.)
Source Balancing Authority	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		9/30/2014	The Balancing Authority in which the generation (source) is located for an Interchange Transaction. (This will also be a Sending Balancing Authority for the resulting Interchange Schedule.)
System Operating Limit	<a href="#">Version 0 Reliability Standards</a>	SOL	2/8/2005	3/16/2007		6/30/2014	The value (such as MW, MVar, Amperes, Frequency or Volts) that satisfies the most limiting of the prescribed operating criteria for a specified system configuration to ensure operation within acceptable reliability criteria. System Operating Limits are based upon certain operating criteria. These include, but are not limited to: <ul style="list-style-type: none"> <li>• Facility Ratings (Applicable pre- and post-Contingency equipment or facility ratings)</li> <li>• Transient Stability Ratings (Applicable pre- and post-Contingency Stability Limits)</li> <li>• Voltage Stability Ratings (Applicable pre- and post-Contingency Voltage Stability)</li> <li>• System Voltage Limits (Applicable pre- and post-Contingency Voltage Limits)</li> </ul>
System Operator	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007		6/30/2016	An individual at a control center (Balancing Authority, Transmission Operator, Generator Operator, Reliability Coordinator) whose responsibility it is to monitor and control that electric system in real time.
Transmission Customer	<a href="#">Version 0 Reliability Standards</a>		2/8/2005	3/16/2007			1. Any eligible customer (or its designated agent) that can or does execute a transmission service agreement or can or does receive transmission service. 2. Any of the following responsible entities: Generator Owner, Load-Serving Entity, or Purchasing-Selling Entity.
Transmission Operator	<a href="#">Version 0 Reliability Standards</a>	TOP	2/8/2005	3/16/2007			The entity responsible for the reliability of its "local" transmission system, and that operates or directs the operations of the transmission facilities.
Transmission Owner	<a href="#">Version 0 Reliability Standards</a>	TO	2/8/2005	3/16/2007			The entity that owns and maintains transmission facilities.
Transmission Planner	<a href="#">Version 0 Reliability Standards</a>	TP	2/8/2005	3/16/2007			The entity that develops a long-term (generally one year and beyond) plan for the reliability (adequacy) of the interconnected bulk electric transmission systems within its portion of the Planning Authority Area.
Transmission Service Provider	<a href="#">Version 0 Reliability Standards</a>	TSP	2/8/2005	3/16/2007			The entity that administers the transmission tariff and provides Transmission Service to Transmission Customers under applicable transmission service agreements.

TABLE 3: RETIRED TERMS

Continent-wide Term	Link to Project Page	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Vegetation Inspection	<a href="#">Project 2007-07 Transmission Vegetation Management</a>		2/7/2006	3/16/2007		3/20/2013	The systematic examination of a transmission corridor to document vegetation conditions.
Vegetation Inspection	<a href="#">Project 2007-07 Transmission Vegetation Management</a>		11/3/2011	3/21/2013		6/30/2014	The systematic examination of vegetation conditions on a Right-of-Way and those vegetation conditions under the Transmission Owner's control that are likely to pose a hazard to the line(s) prior to the next planned maintenance or inspection. This may be combined with a general line inspection.

**NPCC REGIONAL DEFINITIONS**

NPCC Regional Term	Link to Implementation Plan	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Current Zero Time	<a href="#">PRC-002-NPCC-1 Implementation Plan</a>		11/4/2010	10/20/2011	10/20/2013		The time of the final current zero on the last phase to interrupt.
Generating Plant	<a href="#">PRC-002-NPCC-1 Implementation Plan</a>		11/4/2010	10/20/2011	10/20/2013		One or more generators at a single physical location whereby any single contingency can affect all the generators at that location.

**RELIABILITYFIRST REGIONAL DEFINITIONS**

RELIABILITYFIRST Regional Term	Link to FERC Order	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Resource Adequacy	<a href="#">BAL-502-RFC-02 Implementation Plan</a>		8/5/2009	<a href="#">3/17/2011</a>			The ability of supply-side and demand-side resources to meet the aggregate electrical demand (including losses)
Net Internal Demand	<a href="#">BAL-502-RFC-02 Implementation Plan</a>		8/5/2009	<a href="#">3/17/2011</a>			Total of all end-use customer demand and electric system losses within specified metered boundaries, less Direct Control Management and Interruptible Demand
Peak Period	<a href="#">BAL-502-RFC-02 Implementation Plan</a>		8/5/2009	<a href="#">3/17/2011</a>			A period consisting of two (2) or more calendar months but less than seven (7) calendar months, which includes the period during which the responsible entity's annual peak demand is expected to occur
Wind Generating Station	<a href="#">BAL-502-RFC-02 Implementation Plan</a>		11/3/2011 (Board withdrew approval 11/7/2012)	<a href="#">3/17/2011</a>			A collection of wind turbines electrically connected together and injecting energy into the grid at one point, sometimes known as a "Wind Farm."
Year One	<a href="#">BAL-502-RFC-02 Implementation Plan</a>		8/5/2009	<a href="#">3/17/2011</a>			The planning year that begins with the upcoming annual Peak Period

**TEXAS RE REGIONAL DEFINITIONS**

TEXAS RE Regional Term	Link to Implementation Plan	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
Frequency Measurable Event	<a href="#">BAL-001-TRE-1 Implementation Plan</a>	FME	8/15/2013	1/16/2014	4/1/2014		An event that results in a Frequency Deviation, identified at the BA's sole discretion, and meeting one of the following conditions:  i) a Frequency Deviation that has a pre-perturbation [the 16-second period of time before t(0)] average frequency to post-perturbation [the 32-second period of time starting 20 seconds after t(0)] average frequency absolute deviation greater than 100 mHz (the 100 mHz value may be adjusted by the BA to capture 30 to 40 events per year).  Or  ii) a cumulative change in generating unit/generating facility, DC tie and/or firm load pre-perturbation megawatt value to post-perturbation megawatt value absolute deviation greater than 550 MW (the 550 MW value may be adjusted by the BA to capture 30 to 40 events per year).
Governor	<a href="#">BAL-001-TRE-1 Implementation Plan</a>		8/15/2013	1/16/2014	4/1/2014		The electronic, digital or mechanical device that implements Primary Frequency Response of generating units/generating facilities or other system elements.
Primary Frequency Response	<a href="#">BAL-001-TRE-1 Implementation Plan</a>	PFR	8/15/2013	1/16/2014	4/1/2014		The immediate proportional increase or decrease in real power output provided by generating units/generating facilities and the natural real power dampening response provided by Load in response to system Frequency Deviations. This response is in the direction that stabilizes frequency.

**WECC REGIONAL DEFINITIONS**

WECC Regional Term	WECC Standards Under Development	Acronym	BOT Adoption Date	FERC Approval Date	Effective Date	Inactive Date	Definition
<a href="#">Area Control Error *</a>	<a href="#">WECC Regional Standards Under Development</a>	ACE	3/12/2007	6/8/2007		3/31/2014	Means the instantaneous difference between net actual and scheduled interchange, taking into account the effects of Frequency Bias including correction for meter error.
<a href="#">Automatic Generation Control *</a>	<a href="#">WECC Regional Standards Under Development</a>	AGC	3/12/2007	6/8/2007			Means equipment that automatically adjusts a Control Area's generation from a central location to maintain its interchange schedule plus Frequency Bias. A frequency control automatic action that a Balancing Authority uses to offset its frequency contribution to support the interconnection's scheduled frequency.
Automatic Time Error Correction	<a href="#">WECC Regional Standards Under Development</a>		3/26/2008	5/21/2009		3/31/2014	
Automatic Time Error Correction	<a href="#">WECC Regional Standards Under Development</a>		12/19/2012	10/16/2013	4/1/2014		The addition of a component to the ACE equation that modifies the control point for the purpose of continuously paying back Primary Inadvertent Interchange to correct accumulated time error.
<a href="#">Average Generation *</a>	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Means the total MWh generated within the Balancing Authority Operator's Balancing Authority Area during the prior year divided by 8760 hours (8784 hours if the prior year had 366 days).
<a href="#">Business Day *</a>	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Means any day other than Saturday, Sunday, or a legal public holiday as designated in section 6103 of Title 5, U.S. Code.
Commercial Operation	<a href="#">WECC Regional Standards Under Development</a>		10/29/2008	4/21/2011			Achievement of this designation indicates that the Generator Operator or Transmission Operator of the synchronous generator or synchronous condenser has received all approvals necessary for operation after completion of initial start-up testing.
Contributing Schedule	<a href="#">WECC Regional Standards Under Development</a>		2/10/2009	3/17/2011			A Schedule not on the Qualified Transfer Path between a Source Balancing Authority and a Sink Balancing Authority that contributes unscheduled flow across the Qualified Transfer Path.
Dependability-Based Misoperation	<a href="#">WECC Regional Standards Under Development</a>		10/29/2008	4/21/2011			Is the absence of a Protection System or RAS operation when intended. Dependability is a component of reliability and is the measure of a device's certainty to operate when required.
<a href="#">Disturbance *</a>	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Means (i) any perturbation to the electric system, or (ii) the unexpected change in ACE that is caused by the sudden loss of generation or interruption of load.
<a href="#">Extraordinary Contingency *</a>	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Shall have the meaning set out in Excuse of Performance, section B.4.c. language in section B.4.c. means any act of God, actions by a non-affiliated third party, labor disturbance, act of the public enemy, war, insurrection, riot, fire, storm or flood, earthquake, explosion, accident to or breakage, failure or malfunction of machinery or equipment, or any other cause beyond the Reliability Entity's reasonable control, provided that prudent industry standards (e.g. maintenance, design, operation) have been employed; and provided further that no act or cause shall be considered an Extraordinary Contingency if such act or cause results in any contingency contemplated in any WECC Reliability Standard (e.g., the "Most Severe Single Contingency" as defined in the WECC Reliability Criteria or any lesser contingency).
<a href="#">Frequency Bias *</a>	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Means a value, usually given in megawatts per 0.1 Hz, associated with a Control Area that relates the difference between scheduled and actual frequency to the amount of generation required to correct the difference.
Functionally Equivalent Protection System	<a href="#">WECC Regional Standards Under Development</a>	FEPS	10/29/2008	4/21/2011			A Protection System that provides performance as follows: • Each Protection System can detect the same faults within the zone of protection and provide the clearing times and coordination needed to comply with all Reliability Standards. • Each Protection System may have different components and operating characteristics.
Functionally Equivalent RAS	<a href="#">WECC Regional Standards Under Development</a>	FERAS	10/29/2008	4/21/2011			A Remedial Action Scheme ("RAS") that provides the same performance as follows: • Each RAS can detect the same conditions and provide mitigation to comply with all Reliability Standards. • Each RAS may have different components and operating characteristics.
<a href="#">Generating Unit Capability *</a>	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Means the MVA nameplate rating of a generator.
<a href="#">Non-spinning Reserve *</a>	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Means that Operating Reserve not connected to the system but capable of serving demand within a specified time, or interruptible load that can be removed from the system in a specified time.

Normal Path Rating *	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Is the maximum path rating in MW that has been demonstrated to WECC through study results or actual operation, whichever is greater. For a path with transfer capability limits that vary seasonally, it is the maximum of all the seasonal values.
Operating Reserve *	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Means that capability above firm system demand required to provide for regulation, load-forecasting error, equipment forced and scheduled outages and local area protection. Operating Reserve consists of Spinning Reserve and Nonspinning Reserve.
Operating Transfer Capability Limit *	<a href="#">WECC Regional Standards Under Development</a>	OTC	3/12/2007	6/8/2007			Means the maximum value of the most critical system operating parameter(s) which meets: (a) precontingency criteria as determined by equipment loading capability and acceptable voltage conditions, (b) transient criteria as determined by equipment loading capability and acceptable voltage conditions, (c) transient performance criteria, and (d) post-contingency loading and voltage criteria.
Primary Inadvertent Interchange	<a href="#">WECC Regional Standards Under Development</a>		3/26/2008	5/21/2009			The component of area (n) inadvertent interchange caused by the regulating deficiencies of the area (n).
Qualified Controllable Device	<a href="#">WECC Regional Standards Under Development</a>		2/10/2009	3/17/2011			A controllable device installed in the Interconnection for controlling energy flow and the WECC Operating Committee has approved using the device for controlling the USF on the Qualified Transfer Paths.
Qualified Transfer Path	<a href="#">WECC Regional Standards Under Development</a>		2/10/2009	3/17/2011			A transfer path designated by the WECC Operating Committee as being qualified for WECC unscheduled flow mitigation.
Qualified Transfer Path Curtailment Event	<a href="#">WECC Regional Standards Under Development</a>		2/10/2009	3/17/2011			Each hour that a Transmission Operator calls for Step 4 or higher for one or more consecutive hours (See Attachment 1 IRO-006-WECC-1) during which the curtailment tool is functional.
Relief Requirement	<a href="#">WECC Regional Standards Under Development</a>		2/10/2009	3/17/2011		6/30/2014	The expected amount of the unscheduled flow reduction on the Qualified Transfer Path that would result by curtailing each Sink Balancing Authority's Contributing Schedules by the percentages listed in the columns of WECC Unscheduled Flow Mitigation Summary of Actions Table in Attachment 1 WECC IRO-006-WECC-1.
Relief Requirement	<a href="#">WECC Regional Standards Under Development</a>		2/7/2013	6/13/2014		7/1/2014	The expected amount of the unscheduled flow reduction on the Qualified Transfer Path that would result by curtailing each Sink Balancing Authority's Contributing Schedules by the percentages determined in the WECC unscheduled flow mitigation guideline.
Secondary Inadvertent Interchange	<a href="#">WECC Regional Standards Under Development</a>		3/26/2008	5/21/2009			The component of area (n) inadvertent interchange caused by the regulating deficiencies of area (i).
Security-Based Misoperation	<a href="#">WECC Regional Standards Under Development</a>		10/29/2008	4/21/2011			A Misoperation caused by the incorrect operation of a Protection System or RAS. Security is a component of reliability and is the measure of a device's certainty not to operate falsely.
Spinning Reserve *	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Means unloaded generation which is synchronized and ready to serve additional demand. It consists of Regulating reserve and Contingency reserve (as each are described in Sections B.a.i and ii).
Transfer Distribution Factor	<a href="#">WECC Regional Standards Under Development</a>	TDF	2/10/2009	3/17/2011			The percentage of USF that flows across a Qualified Transfer Path when an Interchange Transaction (Contributing Schedule) is implemented. [See the WECC Unscheduled Flow Mitigation Summary of Actions Table (Attachment 1 WECC IRO-006-WECC-1).]
WECC Table 2 *	<a href="#">WECC Regional Standards Under Development</a>		3/12/2007	6/8/2007			Means the table maintained by the WECC identifying those transfer paths monitored by the WECC regional Reliability coordinators. As of the date set out therein, the transmission paths identified in Table 2 are as listed in Attachment A to this Standard.

\* FERC approved the WECC Tier One Reliability Standards in the Order Approving Regional Reliability Standards for the Western Interconnection and Directing Modifications, 119 FERC ¶ 61,260 (June 8, 2007). In that Order, FERC directed WECC to address the inconsistencies between the regional definitions and the NERC Glossary in developing permanent replacement standards. The replacement standards designed to address the shortcomings were filed with FERC in 2009.



## CHANGE HISTORY

Date	Action
12/12/16	<b>Updated:</b> 'Adverse Reliability Impact' from Pending to Retired. NERC withdrew the related petition 3/18/2015
11/28/16	<b>Updated</b> ReliabilityFirst - Wind Generating Station term to inactive
9/28/16	<b>Updated</b> CIP v 5 standards effective date from 4/1/2016 to 7/1/2016 per FERC Order 822.
8/17/16	<b>Board Adopted:</b> Operational Planning Analysis and Real-time Assessment
7/13/16	Updated color coding of terms retired 6/30/2016 based on the terms becoming effective 7/1/2016.
6/24/16	<b>FERC approved:</b> Actual Frequency, Actual Net Interchange, Scheduled Net Interchange (NIS), Interchange Meter Error (IME), and Automatic Time Error Correction (ATEC)
	Reporting ACE: status updated
6/21/16	<b>Correction:</b> Reserve Sharing Group Reporting ACE, and Contingency Reserve changed to 11/5/2015 Board adoption date status
4/1/16	<b>Effective:</b> BES Cyber Asset, BES Cyber System, BES Cyber System Information, CIP Exceptional Circumstance, CIP Senior Manager, Cyber Assets, Cyber Security Incident, Dial-up Connectivity, Electronic Access Control or Monitoring Systems, Electronic Access Point, Electronic Security Perimeter, External Routable Connectivity, Interactive Remote Access, Intermediate System, Physical Access Control Systems, Physical Security Perimeter
3/31/16	<b>Inactive:</b> Critical Assets, Critical Cyber Assets, Cyber Assets, Cyber Security Incident, Electronic Security Perimeter, Physical Security Perimeter